


### Series ALLMAG CMA

Volute Casing Centrifugal Pump with Magdrive in block design up to PN 16

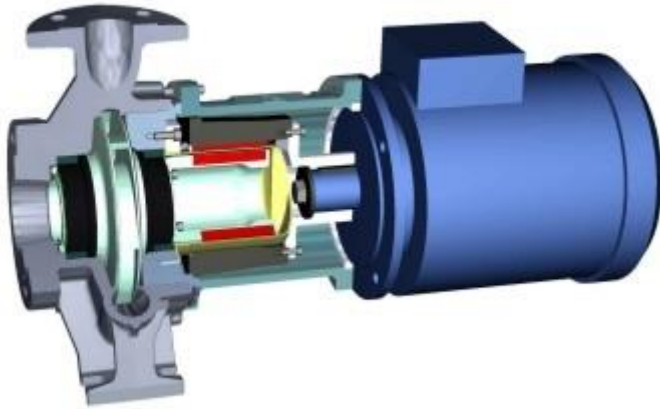

### Pumped liquid

Aggressive fluids, full desalinated water etc.

### Main fields of application

Process engineering and chemical industry, marine and offshore engineering (sea water desalination, chemical tanker)

### Performance data Series ALLMAG CMA

|                    |    |           |                   |
|--------------------|----|-----------|-------------------|
| Capacity           | Q  | up to 80  | m <sup>3</sup> /h |
| Delivery head      | H  | up to 55  | m                 |
| Discharge pressure | pd | up to 16  | bar               |
| Fluid temperature  | t  | up to 150 | °C                |

### Construction features

- Casing dimension and rated output acc to DIN EN 22858/ISO 2858
- Technical execution acc. DIN EN ISO 5199/ISO 5199
- Block design (Motor attached to pump via flange or lantern)
- Dry installation
- Vertical installation
- Horizontal installation
- Stub shaft für IEC motor
- With magnetic drive