

SA SX pleated stainless steel filtering net - 50 micron washable cartridge



APPLICATIONS

Filtration of: sand, scales, rust.

Domestic use: filtration of drinking water, protection of taps, boilers, washing machines and other installations.

Technical use: pre-filtration for water-pumps, irrigation systems, protection of industrial installations; filtration of brackish water (only SA-A stainless steel AISI 316 type).

Average life-span SA-A: about 5 years.

Average life-span SA-C: about 3 years.

Maintenance: wash every 3 months.

WORKING CONDITIONS

Max working temperature _____ 45°C

SPECIFICATIONS


Non-toxic materials, suitable for drinking water.

Filtrating medium: stainless steel net AISI 316 or AISI 304.

Inner core: polypropylene.


End caps: polypropylene.

Flat seals: PVC.

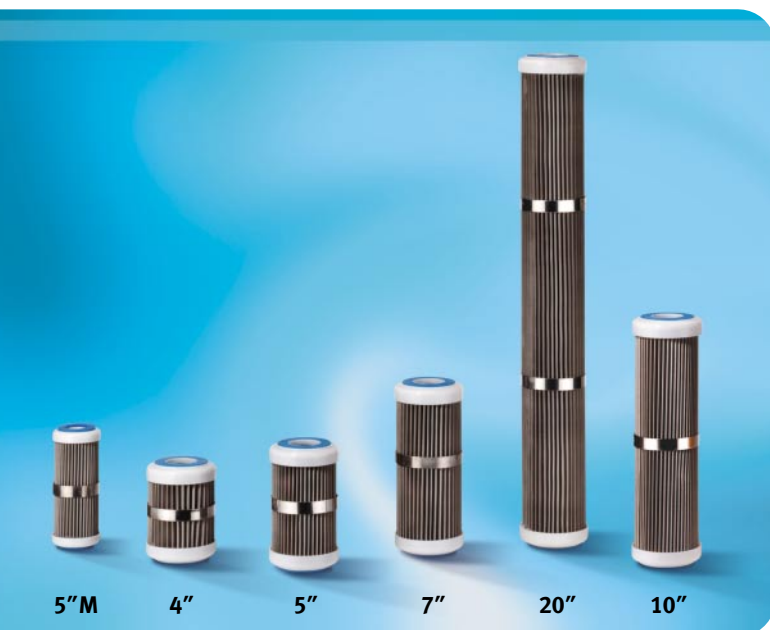

suitable housing	cartridge SA-A AISI 316	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Mignon	SA Mignon-A SX 50 mcr	5''M	122	50	20	700
Cadet	SA 4-A SX 50 mcr	4''	92	70	30	900
Medium	SA 5-A SX 50 mcr	5''	125	70	30	1100
Junior	SA 7-A SX 50 mcr	7''	173	70	30	1500
Senior	SA 10-A SX 50 mcr	10''	250	70	30	2200
Master	SA 20-A SX 50 mcr	20''	505	70	30	3800


suitable housing	cartridge SA-C AISI 304	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Mignon	SA Mignon-C SX 50 mcr	5''M	122	50	20	700
Cadet	SA 4-C SX 50 mcr	4''	92	70	30	900
Medium	SA 5-C SX 50 mcr	5''	125	70	30	1100
Junior	SA 7-C SX 50 mcr	7''	173	70	30	1500
Senior	SA 10-C SX 50 mcr	10''	250	70	30	2200
Master	SA 20-C SX 50 mcr	20''	505	70	30	3800



VARIANTS available on minimum quantity

Cartridges with different filtration rates.

Cartridges with stainless steel end caps, suitable for filtration of hot water.

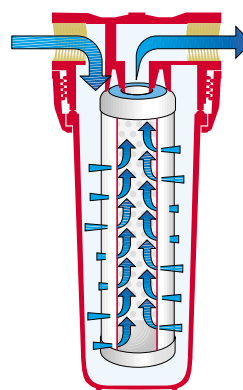

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289