

## Technical data Corode filter unit



# CF02C..M Double

1800l/h – Filter housing PP

Corode unit with magnetic drive pump **CPMD-01**.

Q max :1,8m<sup>3</sup>/h

Q min :0.2m<sup>3</sup>/h

Pump head :PP

Motor :0.09kW, 230V, 0.48Amp, 1Ph, 50Hz, IP55  
*Other voltage options and 60Hz available on request.*

Filter housing in PP maximum temp 80°C

Outside metal SS316

Filter housing: 10" or 20"

### Standard units include:

Air release and drain valve

Equipped with on/ off switch


### Filter media:

Cartridge

### Optional:

Dry run protector

Hand priming pump

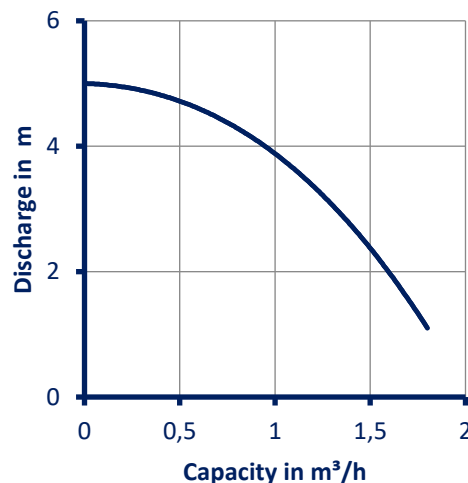

|             | L<br>in cm | W<br>in cm | H<br>in cm | Connection<br>suction pump | Connection<br>outlet filter unit | Filter media    | Filter area<br>in m² |
|-------------|------------|------------|------------|----------------------------|----------------------------------|-----------------|----------------------|
| CF02C2M PP  | 30         | 25         | 60         | Ø19mm                      | Ø19mm                            | Cartridge 2x10" | 0.66                 |
| CF02C22M PP | 30         | 25         | 85         | Ø19mm                      | Ø19mm                            | Cartridge 2x20" | 1.32                 |



info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289