

Technical data Corode magnetic drive pumps

LENNTECH
WATER TREATMENT Solutions





CPMD-04 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:3.7 m ³ /h
Max. head	:7mtr.
Max. temperature	:PP 75°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:0.12kW, 400V, 0.76/0.44Amp, 3Ph, 50Hz, IP55 :0.12kW, 230V, 1.1Amp, 1Ph, 50Hz, IP55 <i>Other voltage options and 60Hz available on request.</i>



CPMD-04

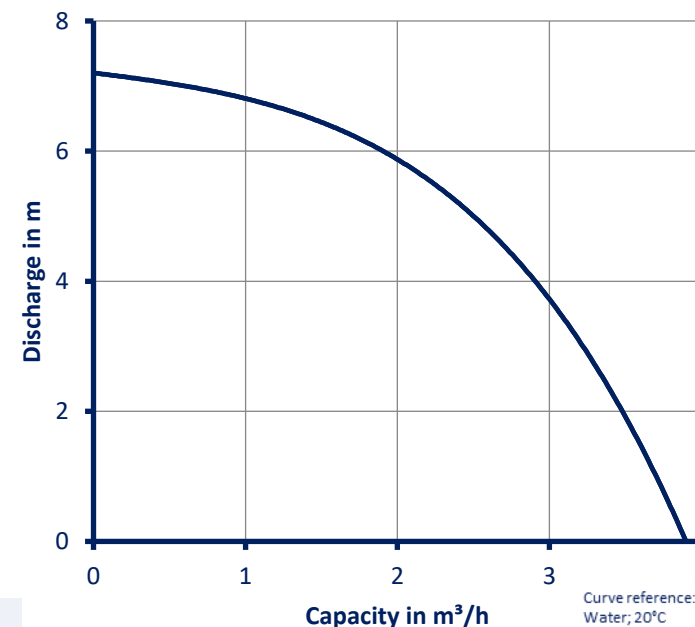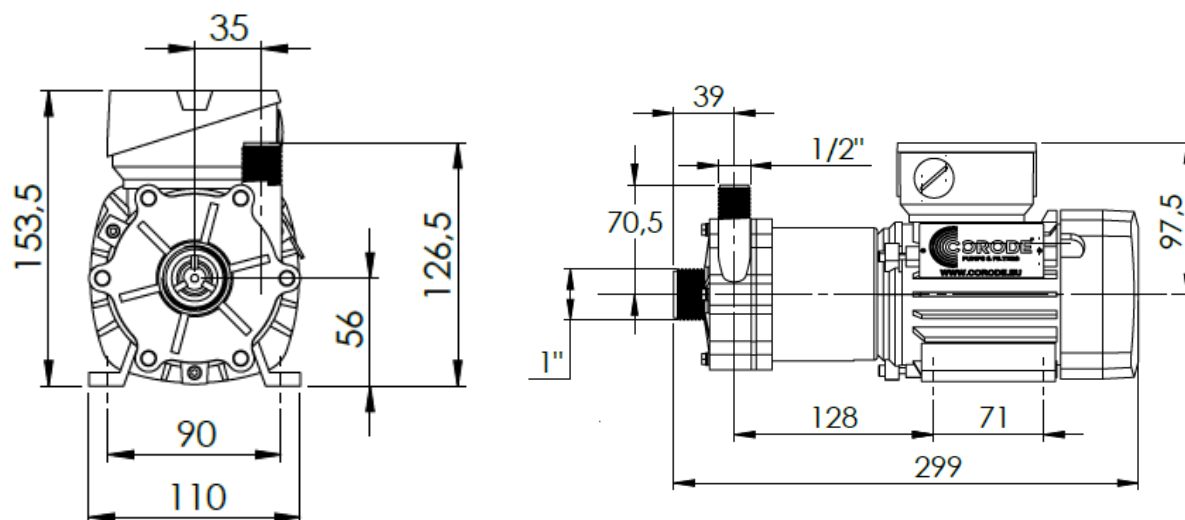

LENNTECH
WATER TREATMENT Solutions

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289