

Technical data Corode magnetic drive pumps

LENNTECH
WATER TREATMENT Solutions



CORODE
PUMPS & FILTERS

CPMD-15 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:20.4m ³ /h
Max. head	:17.8mtr.
Max. temperature	:PP 75°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:1.1kW, 400V, 3.85/2.22Amp, 3Ph, 50Hz, IP55
<i>Other voltage options and 60Hz available on request.</i>	



CPMD-15

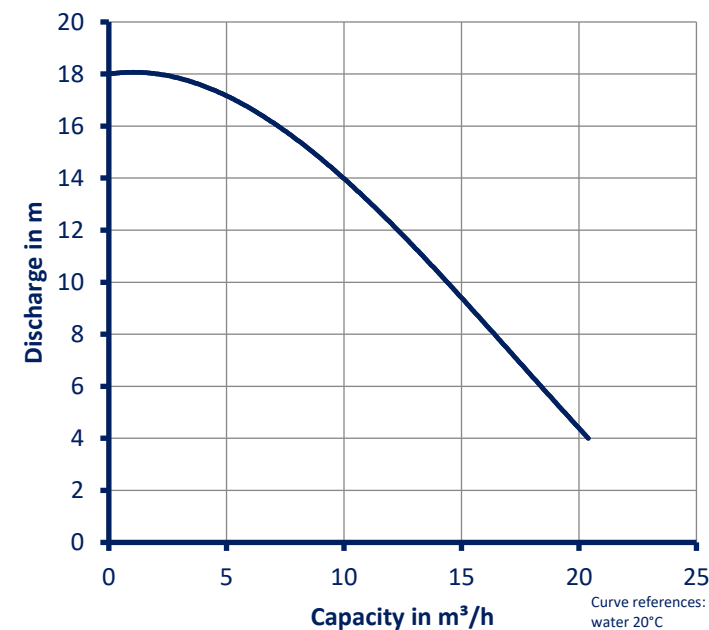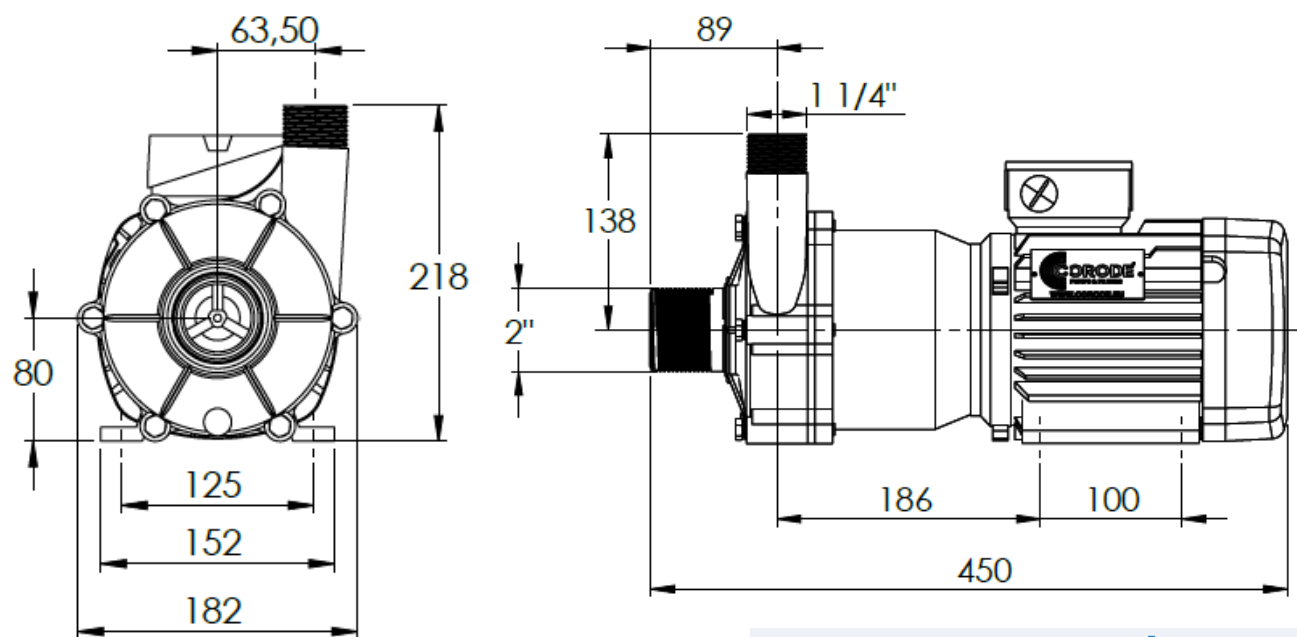

LENNTECH
WATER TREATMENT Solutions

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289