

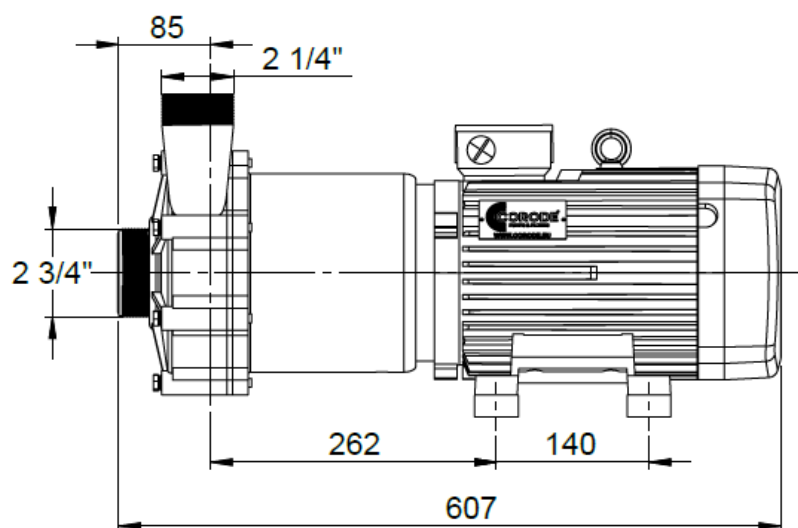


CPMD-50 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:51.6m ³ /h
Max. head	:30mtr.
Max. temperature	:PP 75°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:4kW, 400V, 13.7/8Amp, 3Ph, 50Hz, IP55
<i>Other voltage options and 60Hz available on request.</i>	

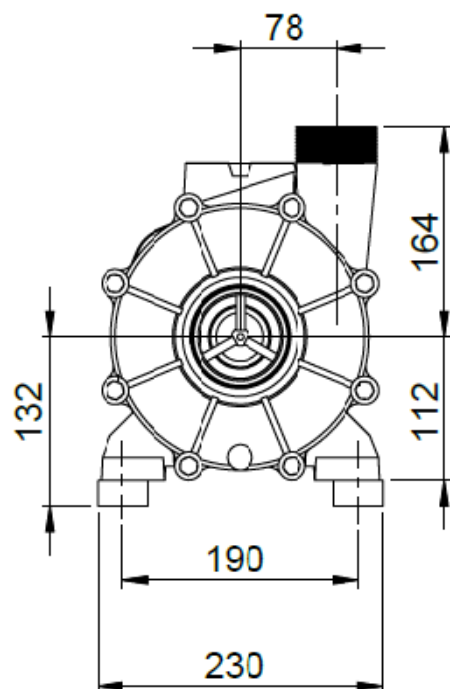

CPMD-50

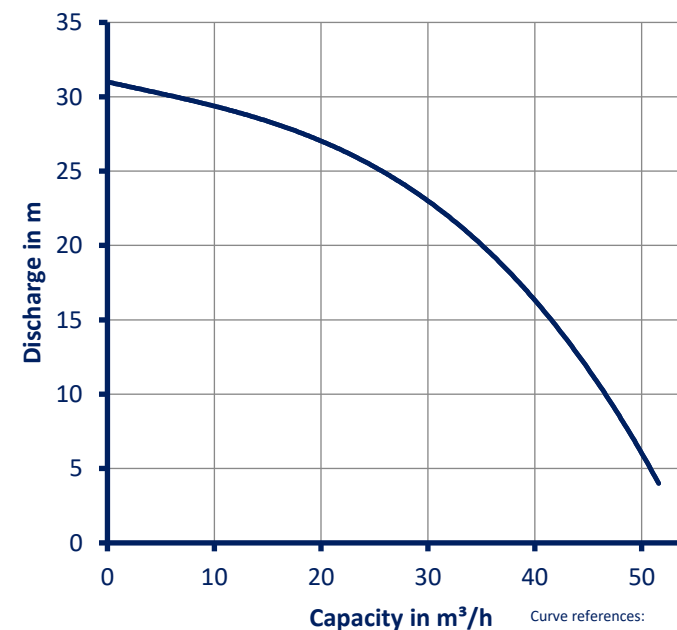

LENNTECH
WATER TREATMENT Solutions

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289