


MAG-20 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:23m ³ /h
Max. head	:19.3mtr.
Max. temperature	:PP 60°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:1.1kW, 400V, 3.97/2.29Amp, 3Ph, 50Hz, IP55



	A	B	C	D	E	F	G	H	K	L	M	N	P
MAG-20	2"out	11/2"out	486	225	200	125	160	100	140	80	100	240	66

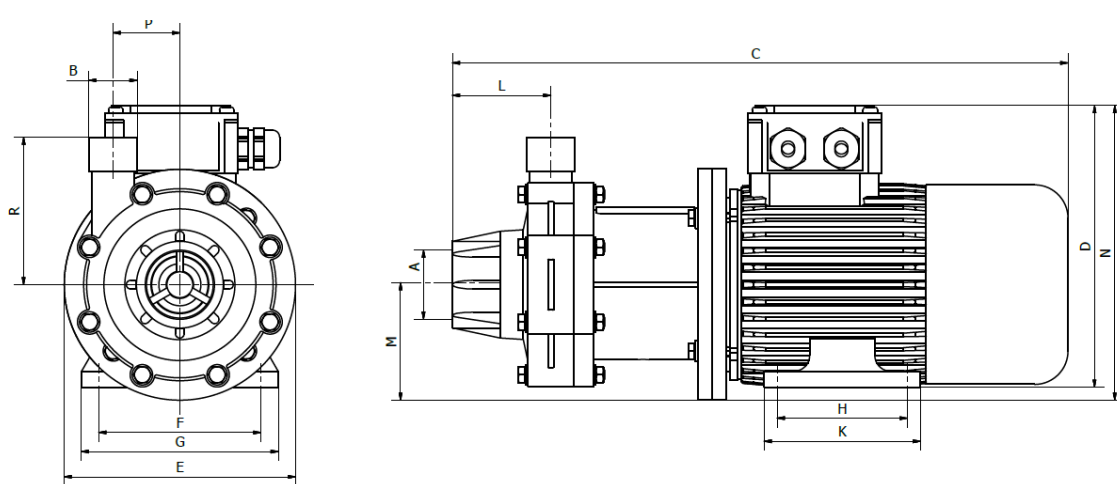