


MAG-25 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:23m ³ /h
Max. head	:19.3mtr.
Max. temperature	:PP 60°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:1.5kW, 400V, 5.3/3.1Amp, 3Ph, 50Hz, IP55



	A	B	C	D	E	F	G	H	K	L	M	N	P
MAG-25	2"out	1 1/2"out	536	225	200	125	160	100	140	80	100	240	66

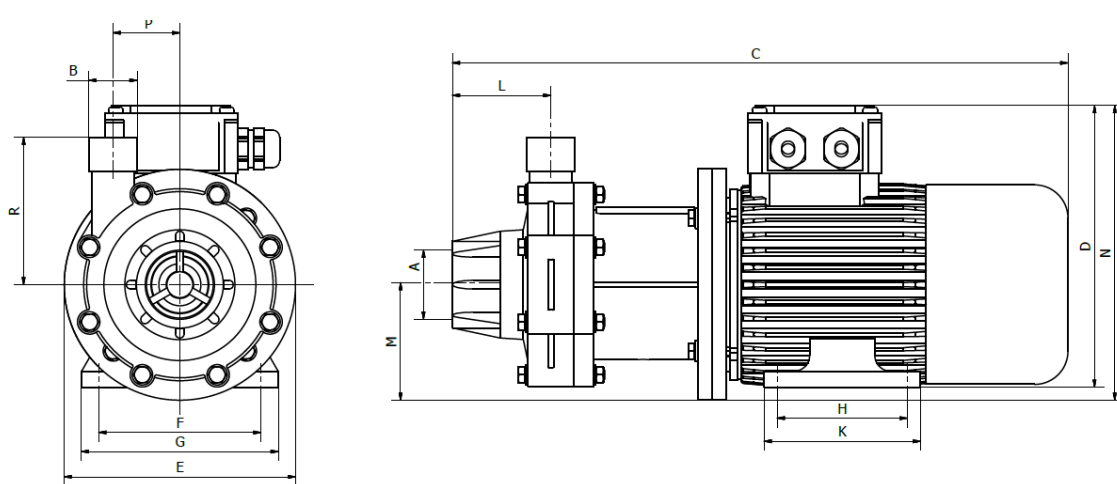