

DAB pump FEKAFOS 280

AUTOMATIC PUMPING STATION

LENNTECH

info@lennotech.com

www.lennotech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89



WASTE WATER COLLECTION AND LIFTING

Automatic collection and lifting stations, used for collecting and pumping civil and industrial waste water in sewers. Comprises a high density 280 litre polythene tank with removable cover complete with a watertight and gastight seal.

Fekafos series is suitable only for the use of one not automatic single/triphas pump from the following: **DN 50 (FEKA 600 M-NA/T, FEKA VS/VX 550-750-1000-1200 M-NA/T GRINDER 1000-1200-1600 T, GRINDER 1400 M-1800 T, FEKA 1400 M-1800 T, FEKA 2015 - 2030.2TNA) DN 65 (FEKA 2500.4T, FEKA 2515-FEKA 2500-FEKA 2700.2T), to be ordered separately.**

Complete with: 2 bulb floats mounted on a stainless steel support, cable holder for connecting the float and pump cables to the electrical panel (**to order separately according performance range table**), DN50 and DN110 suction manifolds and 2" delivery manifolds, connector for DN50 vent tube, lifting device (DSD2) for making pump maintenance easier. An alarm float can be used on request.

Operating range: from 1 to 48 m³/h with a head of up to 23 m.


Liquid temperature range: +55°C.

Pumped liquid: ground water, rain water, clear waste water, black waste water and water from rivers and lakes.




TECHNICAL DATA

MODEL	CODE	CAPACITY [lt]	DIMENSION [mm]	TO BE USED WITH	DN PIPES [mm]
FEKAFOS 280 2"	60114026	280	750x585x900	FEKA 600 M-NA/T, FEKA VS/VX 550-750-1000-1200 M-NA/T GRINDER 1000-1200-1600 T, GRINDER 1400 M-1800 T, FEKA 1400 M-1800 T, FEKA 2015 - 2030.2TNA DN 65 : FEKA 2500.4T, FEKA 2515-FEKA 2500-FEKA 2700.2T	2xDN150, 3xDN110, 2xDN50 inlet 1xDN50 ventilation 1xDN40 emergency emptying
FEKAFOS 280 2" 1/2	60114039				

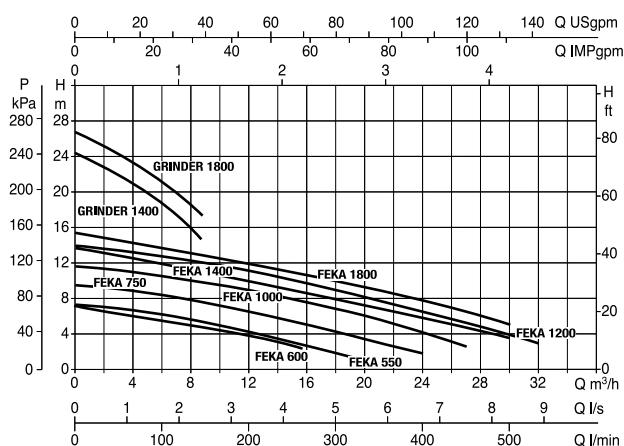

DIMENSIONS AND WEIGHTS

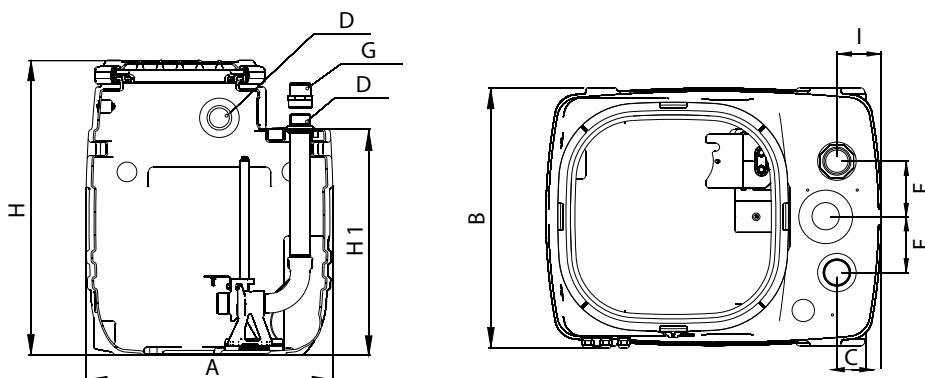

MODEL	A	B	C	D	E	F	G	H	H1	I	WEIGHT KG.
FEKAFOS 280/...	750	585	99	DN 50/110	125	125	2"	900	690	99	37

