

**DOWEX 21K XLT**

A Uniform Particle Size, High Capacity, Strong Base Anion Exchange Resin for Mineral Processing Applications

Product	Type	Matrix	Functional group
DOWEX* 21K XLT	Type I strong base anion	Styrene-DVB, gel	Quaternary amine

Guaranteed Sales Specifications

Total exchange capacity, min.	eq/L	1.4
Water content	%	50 - 60
Bead size distribution		
Volume median diameter	µm	525 - 625
Uniformity coefficient, max.	%	1.1

Typical Physical and Chemical Properties

Ionic form as delivered		Cl ⁻
Total swelling (Cl ⁻ ⇒ OH ⁻), approx.	%	18 - 20
Whole uncracked beads, min.	%	90
Particle density, approx.	g/mL	1.08
Shipping weight, approx.	g/L	670
	lbs/ft ³	42

Recommended Operating Conditions

- Maximum operating temperature:
 - OH⁻ form 60°C (140°F)
 - Cl⁻ form 100°C (212°F)
- pH range 0 - 14
- Bed depth, min. 800 mm (2.6 ft)
- Flow rates:
 - Service/fast rinse 5 - 60 m/h (2 - 24 gpm/ft²)
 - Backwash See figure 1
 - Co-current regeneration/displacement rinse 1 - 10 m/h (0.4 - 4 gpm/ft²)
 - Counter-current regeneration/displacement rinse 5 - 20 m/h (2 - 8 gpm/ft²)
- Total rinse requirement 3 - 6 Bed volumes
- Regenerant:
 - Type NaCl/Carbonate
 - Temperature Ambient or up to 50°C (122°F) for silica removal
- Organic loading, max. 3g KMnO₄/L resin

Typical properties and applications

DOWEX 21K XLT type 1 strong base anion resin has excellent kinetics, excellent regeneration efficiency and outstanding physical stability. The uniform sized beads give maximum performance for all packed bed systems. DOWEX 21K XLT represents the state-of-the-art in mineral processing resins.

Packaging

5 cubic foot fiber drums

Figure 1. Pressure Drop vs. Flow Rate

For DOWEX 21K Resins, Cl, 77 deg. F


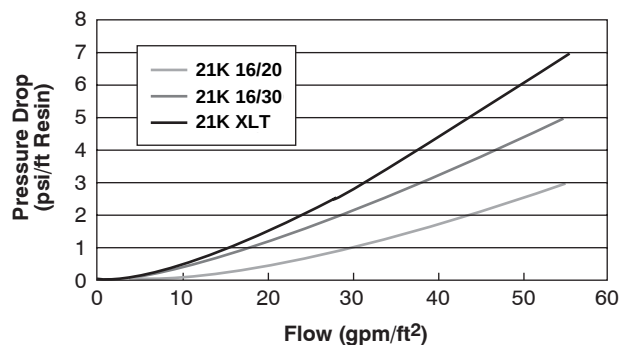


Figure 2. Backwash Expansion vs. Flow Rate

For DOWEX 21K Resins, Cl, 77 deg. F

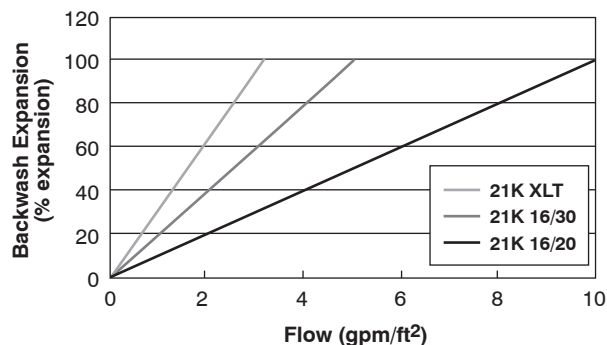

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

