

**DOWEX HGR-W2**

A High Capacity Strong Acid Cation Exchange Resin for Mixed Bed Demineralization and Condensate Polishing Applications

Product	Type	Matrix	Functional group
DOWEX™ HGR-W2	Strong acid cation	Styrene-DVB gel	Sulfonic acid

Guaranteed Sales Specifications				H ⁺ form		
Total exchange capacity, min.		eq/L	2.0			
		kg/ft ³ as CaCO ₃	43.7			
Water content		%	47 - 51			
Bead size distribution ^a						
> 1,200 μm, max. (16 mesh)		%	2			
< 420 μm, max. (40 mesh)		%	1			
Whole uncracked beads, min.		%	95			
Crush strength						
Average, min.		g/bead	350			
> 200 g/bead, min.		%	95			
Ionic conversions, H ⁺ form, min.		%	99			
Trace metals, ppm dry resin, max. (H ⁺ form)						
Na	Fe	Cu	Al	Mg	Ca	Heavy metals (as Pb)
50	50	10	50	50	50	10

Typical Physical and Chemical Properties		H ⁺ form
Total swelling (Na ⁺ → H ⁺)	%	7
Particle density	g/mL	1.23
Shipping weight	g/L	820
	lbs/ft ³	51

Recommended Operating Conditions

- Maximum operating temperature: 130°C (265°F)
- pH range: 0 - 14
- Bed depth, min.: 450 mm (1.5 ft)
- Flow rates:
 - Service/fast rinse: 5 - 50 m/h (2 - 20 gpm/ft²)
 - Service/condensate polishing: 40 - 150 m/h (16 - 60 gpm/ft²)
 - Backwash: See figure 1
 - Regeneration/displacement rinse: 1 - 10 m/h (0.4 - 4 gpm /ft²)
- Total rinse requirement: 3 - 6 Bed volumes
- Regenerant:
 - 1 - 10% H₂SO₄, 4 - 8% HCl or
 - 8 - 12% NaCl

† For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775).

Typical properties and applications

DOWEX HGR-W2 strong acid cation resin is a premium grade product with high exchange capacity, excellent resistance to attrition and good resistance to thermal and oxidative degradation.


The high cross-linkage results in increased density which improves separation following backwash in mixed bed applications.

DOWEX HGR-W2 resin can be used in combination with DOWEX MONOSOLARE DOWEX SBR-P C (OH) or DOWEX SBR C (OH) anion exchange resins in mixed beds for deep-bed condensate polishing. It is also used in single beds for sodium cycle condensate polishing.

Packaging

25 liter bags or 5 cubic feet fiber drums

Figure 1. Backwash Expansion Data

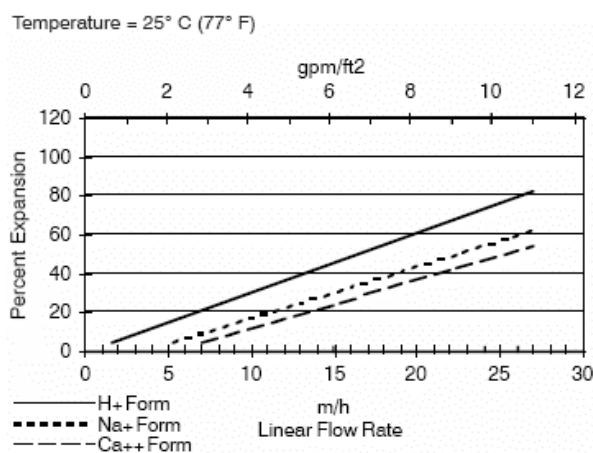


For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_F - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_C - 45)], \text{ where } F \equiv \text{m/h}$$

Figure 2. Pressure Drop Data

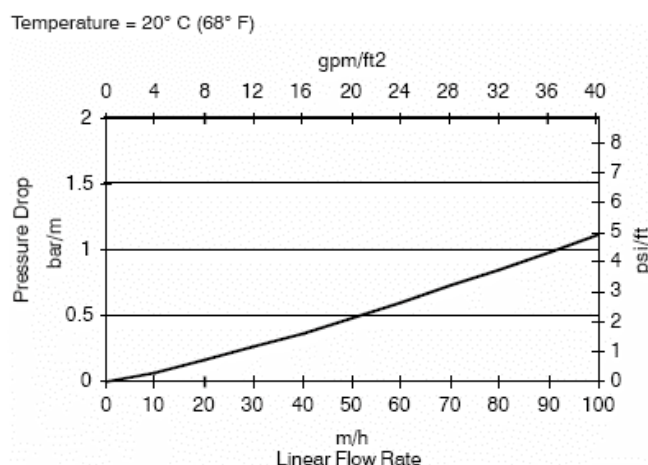

For other temperatures use:

$$P_T = P_{20°C} / (0.026 T_C + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_F + 0.05), \text{ where } P \equiv \text{psi/ft}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

