



DOWEX™ MONOSPHERE™ 575C NG (H)

A Uniform Particle Size Strong Acid Cation Exchange Resin for Steam Generator
Blowdown, Reactor Water Clean-up and Other Nuclear Water Applications

Product	Type	Matrix	Functional group
DOWEX™ MONOSPHERE™ 575C NG (H)	Strong acid cation	Styrene-DVB gel	Sulfonic acid

Guaranteed Sales Specifications					H ⁺ form		
Total exchange capacity, min.		eq/L			2.3		
		kgr/ft ³ as CaCO ₃			50.3		
Water content		%			41 – 46		
Bead size distribution†							
Mean particle size		µm			550 ± 50		
Uniformity coefficient, max.					1.1		
>800µ, max.		%			3		
<300µ, max.		%			0.2		
Whole uncracked beads, min.		%			95		
Crush strength							
Average, min.		g/bead			500		
> 200 g/bead		%			95		
Ionic conversion, min.		%			99.7		
Trace metals, ppm dry resin, max.							
Na	Fe	Cu	Al	Co	Pb	Hg	Heavy metals (as Pb)
50	50	10	50	30	10	10	10

Typical Physical and Chemical Properties		
Total swelling (Na ⁺ → H ⁺)	%	7
Particle density	g/mL	1.25
Shipping weight**	g/L	800
	lbs/ft ³	50

Recommended Operating Conditions

- Maximum operating temperature 130°C (265°F)
- pH range 0-14
- Bed depth, min. 450 mm (1.5 ft)
- Flow rates:
 - Service/fast rinse 5-60 m/h (2-24 gpm/ft²)
 - Service/condensate polishing 40-150 m/h (16-60 gpm/ft²)
 - Backwash See figure 1
 - Co-current regeneration/displacement rinse 1-10 m/h (0.4-4 gpm /ft²)
- Total rinse requirement 3 – 6 Bed volumes
- Regenerant 1-10% H₂SO₄ or 4-8% HCl

† For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775).

** As per the backwashed and settled density of the resin, determined by ASTM D-2187.

Typical properties and applications

DOWEX™ MONOSPHERE™ 575C NG (H) is a high-capacity, uniform particle size gel cation exchange resin with outstanding purity and performance.


This resin is supplied with a minimum of 99% of ionic sites in the H⁺ form. It also has excellent physical and chemical stability and low metallic impurity levels.

DOWEX MONOSPHERE 575C NG (H) resin can be used as a single resin or in mixed beds together with DOWEX MONOSPHERE 550A LC NG (OH) anion exchange resin.

Packaging

50 liter or 5 cubic feet fiber drums

Figure 1. Backwash Expansion Data

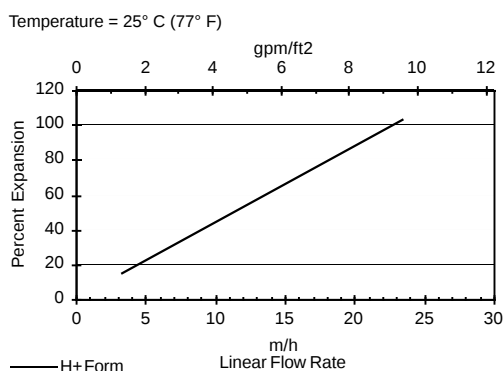


For other temperatures use:

$$F_T = F_{77^\circ\text{F}} [1 + 0.008 (T_{\text{F}} - 77)], \text{ where } F = \text{gpm/ft}^2$$

$$F_T = F_{25^\circ\text{C}} [1 + 0.008 (1.8T_{\text{C}} - 45)], \text{ where } F = \text{m/h}$$

Figure 2. Pressure Drop Data

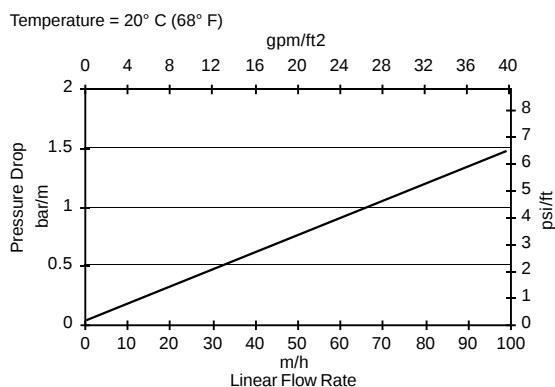

For other temperatures use:

$$P_T = P_{20^\circ\text{C}} / (0.026 T_{\text{C}} + 0.48), \text{ where } P = \text{bar/m}$$

$$P_T = P_{68^\circ\text{F}} / (0.014 T_{\text{F}} + 0.05), \text{ where } P = \text{psi/ft}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Dow assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.



LENNTECH WATER TREATMENT AND AIR PURIFICATION