

**DOWEX MONOSPHERE™ 600i Inert Resin**

for use in condensate polishing systems and other high purity mixed beds

Description

DOWEX MONOSPHERE™ 600i Inert Resin is a non-functionalized resin used to enhance separation of cation and anion exchange resins prior to regeneration. While the primary application for DOWEX MONOSPHERE 600i is in condensate polishing systems for the electrical power generation industry, it can also be used in other high purity mixed bed systems such as those used to make ultrapure water for the manufacture of electronic components. Its density and particle size are tightly controlled to facilitate the terminal settling velocity is intermediate to those of the cation exchange resin and anion exchange resin, creating an inert zone between the functional resins. This inert zone reduces the risk of cross-regeneration, improving water quality and rinse time whether it is used in internally or externally regenerated mixed bed systems.

Typical Physical and Chemical Properties

Matrix	Cross-linked acrylate polymer
Physical Form	Brown opaque spherical beads
Functional Group	None
Particle Size Distribution	
Particle Diameter ^b	550 – 650 µm
Uniformity Coefficient	≤ 1.2
Particle Density	1.10 – 1.20 g/mL
Bulk Density, as Shipped ^c	705 g/L

^b For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 177-01775).

^c As per the backwashed and settled density of the resin, determined by ASTM D-2187.


Suggested Operating Conditions

Maximum Operating Temperature	60°C (140°F)
pH Range	0 – 14
Bed Depth, min.	150 mm (6 in)

Hydraulic Characteristics

Bed expansion of DOWEX MONOSPHERE™ 600i Inert Resin as a function of backwash flowrate at 25°C (77°F) is shown in Figure 1. The flowrate necessary to achieve a desired bed expansion for other water temperatures can be calculated with the provided equations.

Figure 1: Backwash Expansion

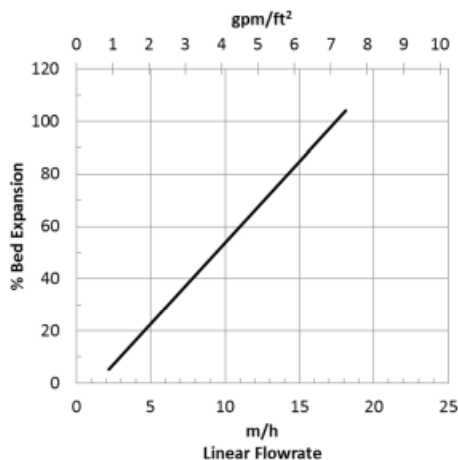

For other temperatures use:

$$F_T = F_{25^\circ\text{C}} [1 + 0.008 (1.8T_{\text{C}} - 45)], \text{ where } F \equiv \text{m/h}$$

$$F_T = F_{77^\circ\text{F}} [1 + 0.008 (T_{\text{F}} - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

Packaging

- 25 liter bags
- 200 liter drums

Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

For more information, contact our
Customer Information Group:

LENNTECH

info@lennotech.com

www.lennotech.com

Tel. +31-152-610-900

Fax +31-152-616-289

WARNING: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. Nothing in this document should be treated as a warranty by Dow of DOWEX MONOSPHERE.

