





Industrial protecting tube *omnigrad TA557*

Heavy duty - General purpose
From round bar stock - Ø 35 mm
1" NPT threaded or flanged weld type
Also ENI BAR 1



Threaded
process connection

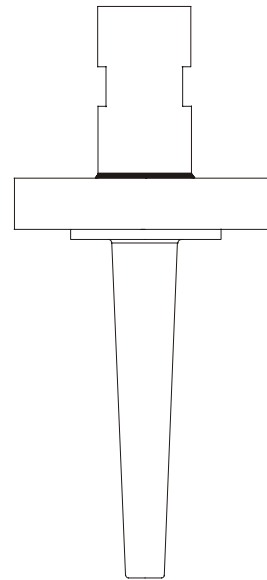

Flanged
process connection

Description

TA557 is an industry standard thermowell, manufactured from round bar stock (drilled).

The process connection can be threaded or flanged weld.

The thermowell stem shape can be straight or conical.

The extension and the immersion lengths as well as the bar dimensions can be chosen according to process requirements.

A wide choice of standard materials and process connections is available; other versions can be ordered according to specification.

Different grades of surface finishing are also available.

Application

TA557 is designed for use with resistance and thermocouple thermometers mainly in heavy duty applications.



Technical data

Round bar

Standard reference:	ENI BAR 1
Extension O.D.:	35 mm
Immersion O.D.:	≤ 28 mm
Standard ext. length:	100 mm
Standard bore diameter:	8 mm
Standard material:	AISI316/W.1.4401, AISI316L/W.1.4404

Connection to thermometer

Threaded:	1/2" NPT - female
-----------	-------------------

Process connection

Type:	threaded or flanged weld
Thread:	1" NPT
Flange type:	ANSI slip-on
Flange material:	AISI 316 or A 105
Flange mounting:	threaded and back welded - 3x3 mm wide

Tip

Bottom shape:	straight or conical
Std. bottom thickness:	5 mm

Surface

Finishing:	refer to the order key
------------	------------------------



Order key

Notes:

Notes:

- (1) Wall thickness 3 mm minimum
(Q2 - F) / 2 $\geq$ 3 mm and
- (2) Nominal length A: 160 ÷ 1000 mm

(2) Nominal length A: 160 ÷ 1000 mm

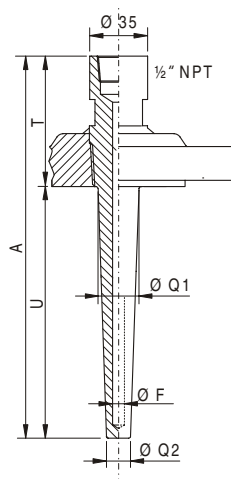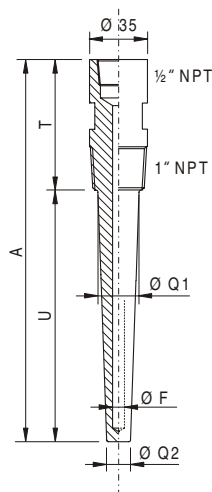

TA557-

HEAVY DUTY THERMOWELL - General purpose - From round bar stock

Ø 35 mm - 1" NPT threaded or flanged weld type - Also ENI BAR 1

Extension, thermowell shape and type (2)

A 100 mm=T,Q1/Q2=25/18 tapered, ENI

Y mm=T, Q1=mm, Q2=mm special taper **(1)**

Immersion Length U (60-900mm) (2)

TA	60	mm immersion length U
TB	70	mm immersion length U
TC	100	mm immersion length U
TD	120	mm immersion length U
TE	130	mm immersion length U
TF	150	mm immersion length U
TG	180	mm immersion length U
TH	200	mm immersion length U
TJ	210	mm immersion length U
TK	220	mm immersion length U
TL	250	mm immersion length U
TM	255	mm immersion length U
TN	260	mm immersion length U
TP	270	mm immersion length U
TQ	305	mm immersion length U
TR	310	mm immersion length U
TS	340	mm immersion length U
TT	350	mm immersion length U
TU	390	mm immersion length U
TV	400	mm immersion length U
TW	450	mm immersion length U
TX	500	mm immersion length U
TZ	600	mm immersion length U
YY	mm	immersion length U to specific.

Thermowell type, price per mm A (U+T) (160-1000mm)

C Thermowell material: SS316 / 1.4401
D Thermowell material: SS316L / 1.4404
Y Special version

Finishing of immersion length

4 1,6 micron finishing immersion length
1 0,8 micron finishing immersion length

Process connection type

AA Process connection: none (1" NPT)
 CD Slip-on 1" ANSI 300 RF SS316
 CH Slip-on 1 1/2" 150 RF SS316
 CK Slip-on 1 1/2" 300 RF SS316
 CP Slip-on 1 1/2" ANSI 600 RTJ SS316
 CV Slip-on 2" ANSI 300 RF SS316
 CX Slip-on 2" ANSI 300 RTJ SS316
 YY Special version

Flange finishing

1 Finishing: not required (no flange)
2 Finishing: standard for ASME/ANSI
9 Flange finishing as specified

Thermowell bore diameter F

2 8 mm thermowell bore F
9 Special thermowell bore (1)

Plug and chain

A Without plug and chain
B Safety plug: SS 304 with chain

Markings

0 Markings not selected
1 Markings punched on

[illegible]



info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

Endress + Hauser
The Power of Know How

