



RTD Thermometer *omnigrad TST434*



**Medium duty - Building automation
for outdoor ambient temperature
with housing for wall mounting**

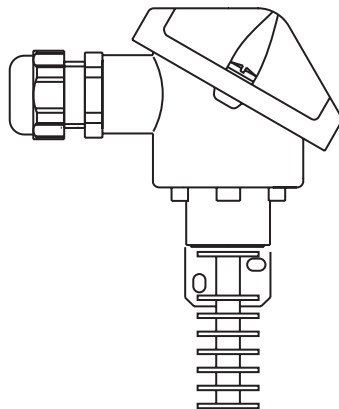

TST434 with TA20A

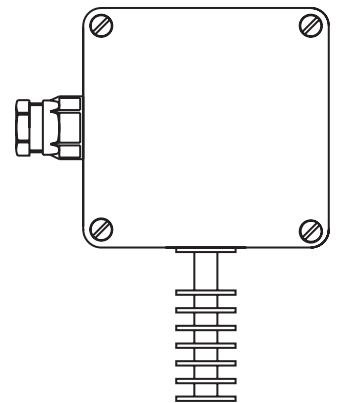

TST434 with TA30

Description

TST434 RTD thermometer includes a 8 mm diameter aluminium anodised thermowell with 20 mm diameter fins and housing suitable for wall mounting

Application

For outdoor temperature measurements or in any wet ambient like refrigerators and climatic chambers. The signal can be transmitted either by ohmic value or a 4...20 mA signal by means of a head transmitter installed in a IP67 Polycarbonate case or in a IP68 head DIN 43729 form B type.



Technical data

Allowed temperature: -30°C to +100°C without transmitter
-20°C to +80°C with transmitter


Protecting tube

Standard diameter: 8 mm diameter with 20 mm diameter fins
Standard material: anodised aluminium

Inset


Sensing element: Platinum resistance, 1 Pt100 Ω at 0°C
Tolerances: Class A or B to IEC 751
Wiring: 3 wire connections
Insulation resistance: $\geq 100 \text{ M}\Omega$, test voltage 250V at ambient temperature
Electrical connections: plate for transmitter mounting or terminal board

TA20A terminal head



Dimensions: according to DIN43763 form B
Protection grade: IP68
Transmitter mounting holes distance: 33 mm
Cable entry: PG16 + grey gland skintop
Thermowell entry: by standard mounting kit
Body colour: blue according to RAL 5012, epoxy coated
Cap colour: grey according to RAL 7035, epoxy coated

TA 30 housing



Dimensions: 80x82x55 mm
Protection grade: IP67
Tranmitter mounting holes distance: 33 mm
Material: polycarbonate
Cable entry: PG9 with cable gland
Thermowell entry: by standard mounting kit
Colour: grey according to RAL 7035



info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

Endress + Hauser
The Power of Know How

