

Self-priming centrifugal pumps with Venturi system up to 9 m

Applications

To work with clean water.
Irrigation and hydropneumatic sets.

Motor

Asynchronous, two poles.
IP 44 protection.
Class F insulation.
Continuous operation.
Single-phase version with built-in thermal protection.
Provided with removable handle for transport.

Materials

Pump body in stainless steel AISI 304.
Motor shaft in stainless steel AISI 420.
Diffusers in glass loaded Noryl®.
Mechanical seal in graphite and steatite.
Motor housing in aluminium L-2521.
Windings impregnated with epoxy resin.

Delta 505/755/1005:

Impeller in glass loaded Noryl®.

Delta 1755:

Impeller in stainless steel AISI 304.

LENNTECH

WATER TREATMENT SOLUTIONS



LENNTECH

WATER TREATMENT SOLUTIONS


info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

Hydraulic performance table


Model	I [A]			P1 [kW]		P2		c	l/min	5	15	25	35	40	50	60	75	1~230 V (model M)	3~400 V (model T)
	1~230 V	230 V	3~400 V	1~230 V	3~400 V	[kW]	[HP]			μf	m³/h	0.3	0.9	1.5	2.1	2.4	3.0	3.6	4.5
Delta 505	2.8	2.2	1.2	0.6	0.6	0.37	0.5	12	mwc	33	26	22	18	17	13			146271	146291
Delta 755	3.4	2.6	1.3	0.8	0.8	0.55	0.75	12		37	32	27	23	21	17			146270	146309
Delta 1005	4.8	3.3	1.9	1.0	1.0	0.75	1.0	16		47	40	34	29	27				146018	146061
Delta 1755	5.5	3.8	2.1	1.2	1.2	0.75	1.0	16		57	55	51	47	44	38	32	21	146017	

Performance curves at 2900 rpm

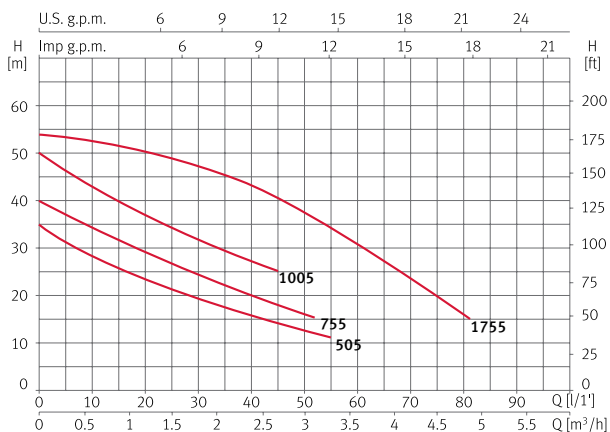

Dimensions and weights

Model	A	B	C	D	E	F	G	H	I	J	K	Kg
Delta 505	336	184	280	200	1"	78	22	215	94	126	147	6.8
Delta 755	336	184	280	200	1"	78	22	215	94	126	147	7.3
Delta 1005	359	184	280	200	1"	78	22	215	94	126	147	9.6
Delta 1755M	410	184	280	200	1"	125	22	215	94	126	147	12.1

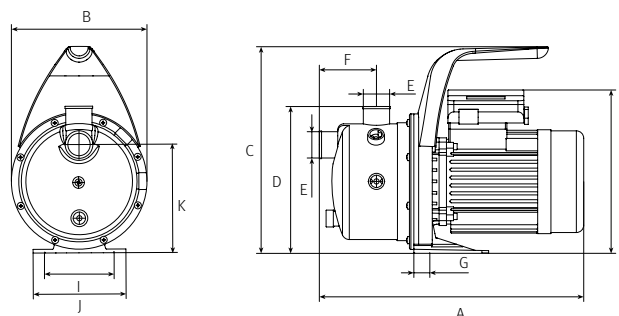

*Service kits are available on request