


## GWPE-Series Water Service Grade Polyethersulfone

GWPE-Series High Purity Water Service Grade Polyethersulfone Filter Cartridges are a value-oriented, reduced surface area choice for cost effective, general purpose membrane filtration. The highly retentive polyethersulfone membrane offers excellent flux density and low protein-binding. The naturally hydrophilic membrane wets easily to allow for the maximum utilization of the surface area. These features allow the GWPE-Series to provide the fine performance of PES membrane at a competitive price. Manufactured in a clean-room environment to maintain high standards of purity and cleanliness. Designed to tolerate repeated hot water sanitization and in-situ steam sterilization cycles.

### Flow Rate vs Pressure Drop

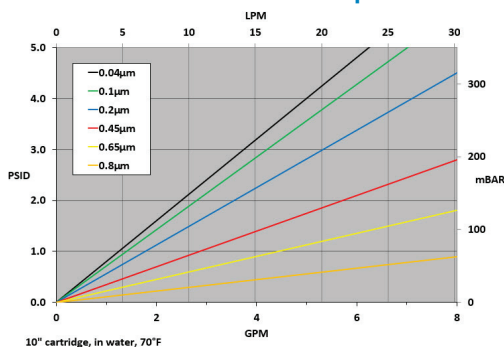

### Typical Applications

- Deionized Water Systems
- General-Use Water Filtration
- Liquid Clarification
- Recirculating Fluids
- Chemical Filtration



### Construction Materials

**Membrane**..... Polyethersulfone  
**Support Media**..... Polypropylene  
**End Caps**..... Polypropylene  
**Center Core**..... Polypropylene  
**Outer Support Cage**..... Polypropylene  
**O-Rings/Gaskets**..... Buna, EPDM, Silicone, Teflon® Encapsulated Viton®, Viton®, Teflon® Encapsulated Silicone

### Sanitization/Sterilization

**Filtered Hot Water**..... 80°C for 30 min.  
**Steam Sterilization**..... 121°C for 30 min., multiple cycles

**Chemicals:** Cartridges are compatible with most chemical sanitizing agents.

**Note:** Stainless steel insert option required for all cartridges being hot water sanitized or steam sterilized.

### Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI – 121°C for plastics.

### Dimensions

**Length:**  
 10 to 40 inches (25.4 to 101.6 cm) nominal  
**Outside Diameter:**  
 2.70 inches (7.0 cm) nominal

### Operating Conditions

**Change Out ΔP (recommended)**..... 35 PSID  
**Temperature (max)**..... 176°F (80°C)  
**Differential Pressure (max)**..... 50 PSID (3.4 bar) at 68°F (20°C)

### Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

### Ordering Information

| GWPEs | Rating (µ) | A | Length         | C | End Cap Style            | O-Rings/Gaskets                   | - | Adders                        |
|-------|------------|---|----------------|---|--------------------------|-----------------------------------|---|-------------------------------|
|       | 0.04       |   | 10" (25.4 cm)  |   | 2 = DOE Flat Gasket      | B = Buna                          |   | CS = 316SS Compression Spring |
|       | 0.1        |   | 20" (50.8 cm)  |   | 3 = 222 w/ Fin           | E = EPDM                          |   | I = Stainless Steel Insert    |
|       | 0.2        |   | 30" (76.2 cm)  |   | 4 = 222 w/ Flat Cap      | S = Silicone                      |   | R = 18 Megaohm Rinse          |
|       | 0.45       |   | 40" (101.6 cm) |   | 6 = 226 w/ Flat Cap      | T = Teflon® Encapsulated Viton®   |   |                               |
|       | 0.65       |   |                |   | 7 = 226 w/ Fin           | V = Viton®                        |   |                               |
|       | 0.8        |   |                |   | 16 = 213 Internal O-Ring | Z = Teflon® Encapsulated Silicone |   |                               |
|       |            |   |                |   | 28 = 222 3-tabs w/ Fin   |                                   |   |                               |

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS\_GWPES\_200605