




SP 8A

Onderwaterpompen, motoren en toebehoren
50 Hz

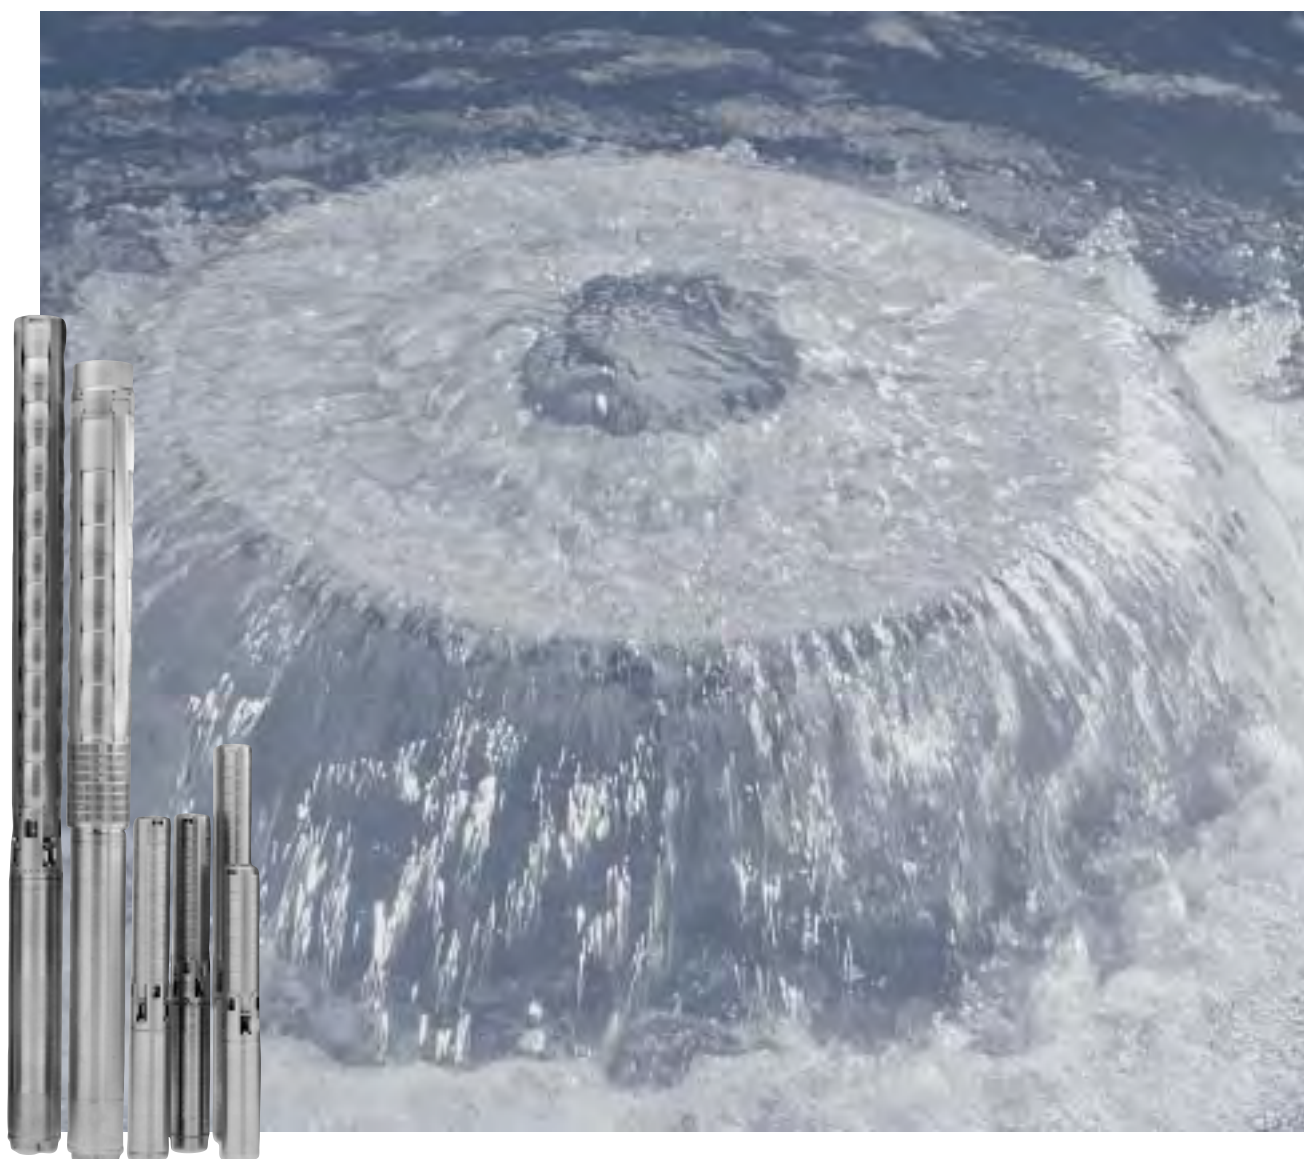


Capaciteitsoverzicht

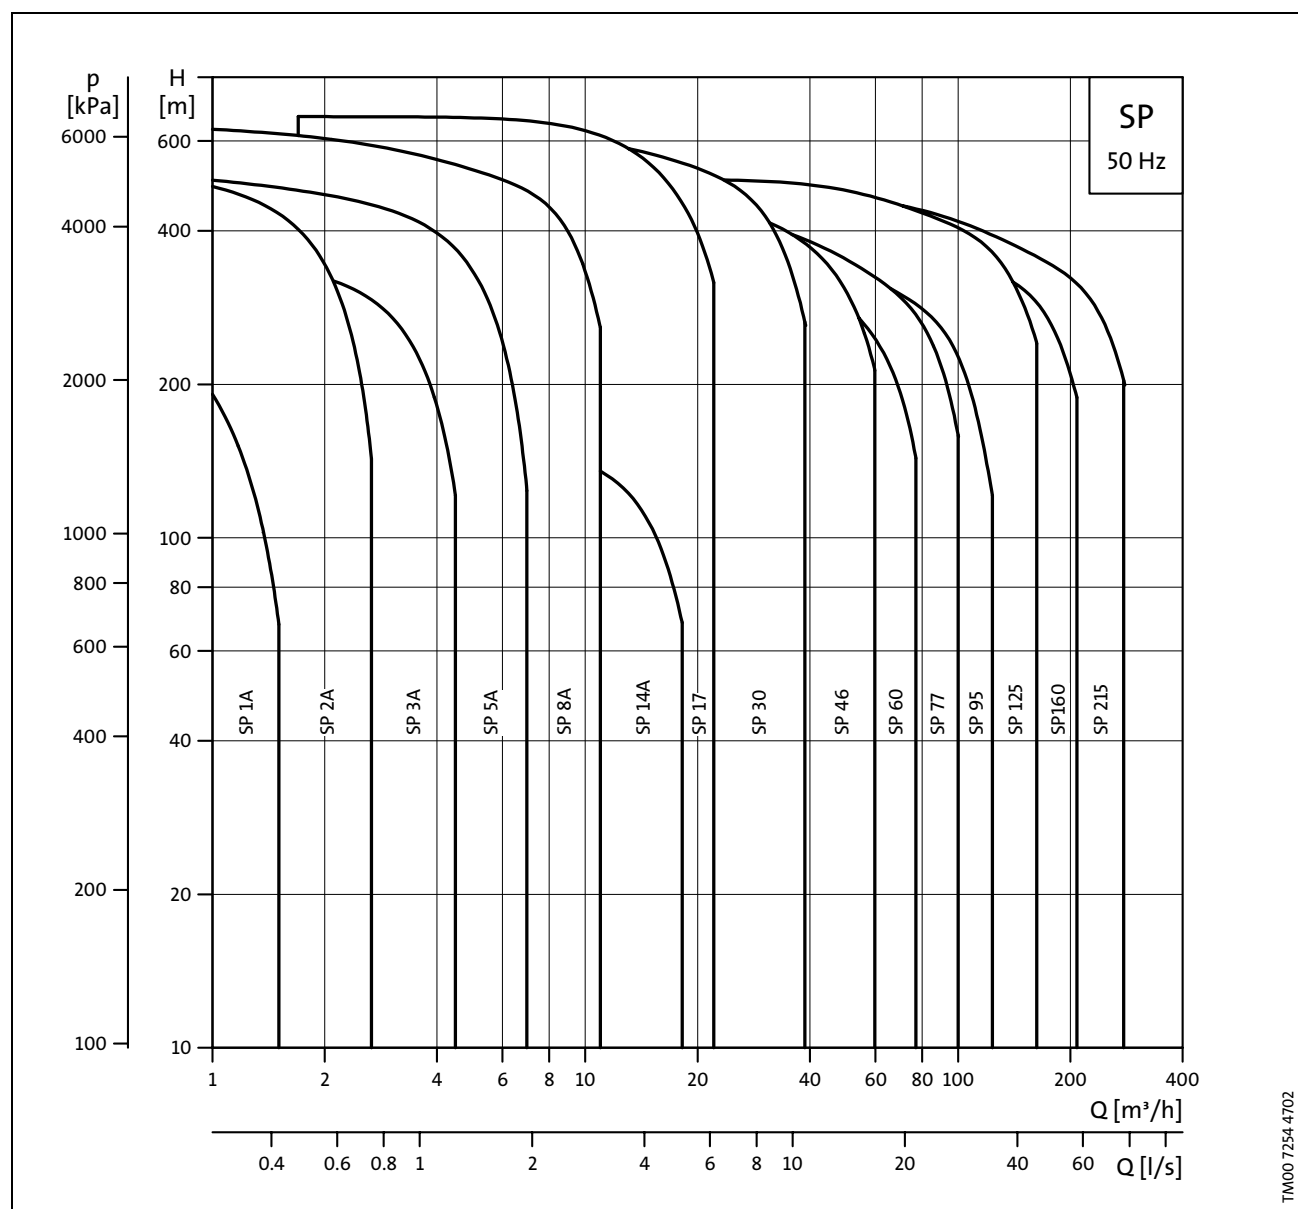

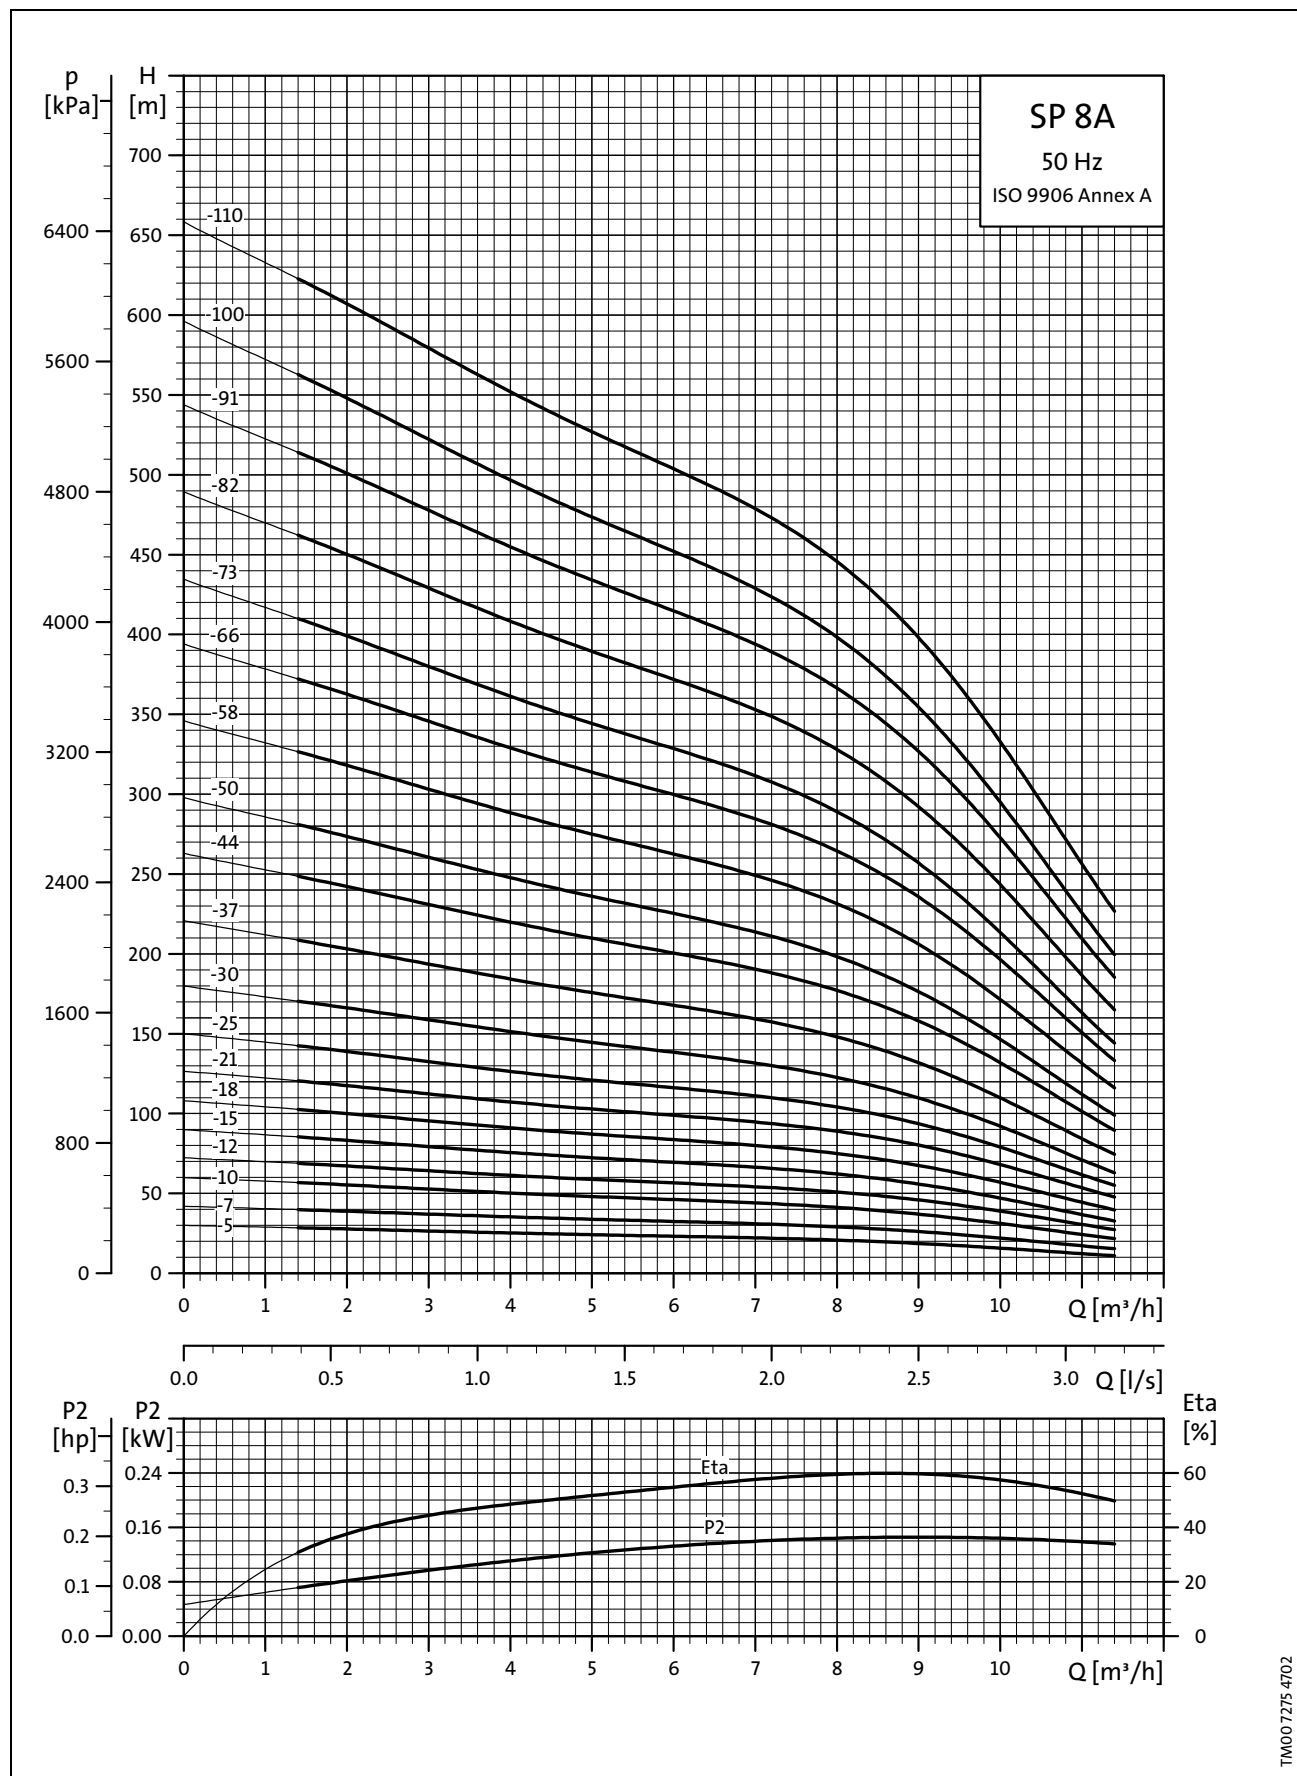

Afmetingen en gewichten

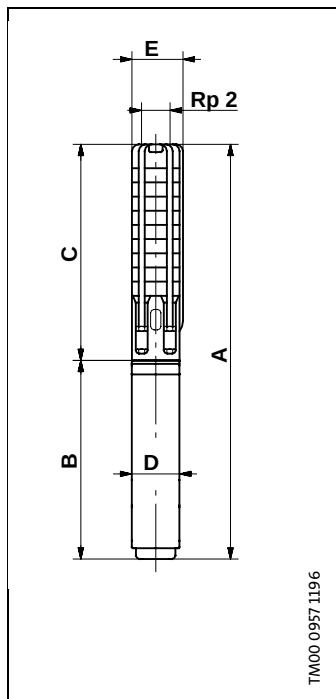

TM00 0957 1196

De SP 8A-58(N) tot SP 8A-110(N) zijn in een mantel geplaatst voorzien van een R 2 aansluiting.

Pomptype	Motor		Afmetingen [mm]							Nettogewicht [kg]	
	Type	Ver-mogen [kW]	C	B		A		D	E	1x230V	3x230V 3x400V
				1x230V	3x230V 3x400V	1x230V	3x230V 3x400V				
SP 8A-5	MS 402	0,75	409	306	276	715	685	95	101	15	13
SP 8A-5N (R)	MS 4000R	2,2	409	573		982		95	101	27	
SP 8A-5N (R)	MS 4000R	0,75	409		398		807	95	101		19
SP 8A-7	MS 402	1,1	493	346	306	839	799	95	101	17	16
SP 8A-7N (R)	MS 4000R	2,2	493	573		1066		95	101	28	
SP 8A-7N (R)	MS 4000R	1,1	493		413		906	95	101		21
SP 8A-10	MS 402	1,5	619	346	346	965	965	95	101	19	19
SP 8A-10N (R)	MS 4000R	2,2	619	573		1192		95	101	30	
SP 8A-10N (R)	MS 4000R	1,5	619		413		1032	95	101		23
SP 8A-12	MS 4000	2,2	703	573		1276		95	101	30	
SP 8A-12	MS 402	2,2	703		346		1049	95	101		21
SP 8A-12N (R)	MS 4000R	2,2	703	573	453	1276	1156	95	101	30	25
SP 8A-15	MS 4000	2,2	829	573		1402		95	101	32	
SP 8A-15	MS 402	2,2	829		346		1175	95	101		23
SP 8A-15N (R)	MS 4000R	2,2	829	573	453	1402	1282	95	101	32	27
SP 8A-18	MS 4000	3,0	955		493		1448	95	101		29
SP 8A-18N (R)	MS 4000R	3,0	955		493		1448	95	101		29
SP 8A-21	MS 4000	4,0	1081		573		1654	95	101		35
SP 8A-21N (R)	MS 4000R	4,0	1081		573		1654	95	101		35
SP 8A-25	MS 4000	4,0	1249		573		1822	95	101		37
SP 8A-25N (R)	MS 4000R	4,0	1249		573		1822	95	101		37
SP 8A-30	MS 4000	5,5	1459		673		2132	95	101		45
SP 8A-30N (R)	MS 4000R	5,5	1459		673		2132	95	101		45
SP 8A-37	MS 4000	5,5	1753		673		2426	95	101		49
SP 8A-37N (R)	MS 4000R	5,5	1753		673		2426	95	101		49
SP 8A-30	MS 6000	5,5	1521		541		2062	138	138		56
SP 8A-30N	MS 6000R	5,5	1521		541		2062	138	138		56
SP 8A-37	MS 6000	5,5	1815		541		2356	138	138		60
SP 8A-37N	MS 6000R	5,5	1815		541		2356	138	138		60
SP 8A-44	MS 4000	7,5	2051		773		2824	95	101		60
SP 8A-44N	MS 4000	7,5	2051		773		2824	95	101		60
SP 8A-44	MS 6000	7,5	2109		571		2680	138	138		66
SP 8A-44N	MS 6000R	7,5	2109		571		2680	138	138		66
SP 8A-50	MS 4000	7,5	2303		773		3076	95	101		64
SP 8A-50N	MS 4000	7,5	2303		773		3076	95	101		64
SP 8A-50	MS 6000	7,5	2361		571		2932	138	138		70
SP 8A-50N	MS 6000R	7,5	2361		571		2932	138	138		70
SP 8A-58	MS 6000	9,2	3013		601		3614	138	140		104
SP 8A-58N	MS 6000R	9,2	3013		601		3614	138	140		104
SP 8A-66	MS 6000	11,0	3349		631		3980	138	140		114
SP 8A-66N	MS 6000R	11,0	3349		631		3980	138	140		114
SP 8A-73	MS 6000	11,0	3643		631		4274	138	140		120
SP 8A-73N	MS 6000R	11,0	3643		631		4274	138	140		120
SP 8A-82	MS 6000	13,0	4021		661		4682	138	140		131
SP 8A-82N	MS 6000R	13,0	4021		661		4682	138	140		131
SP 8A-91	MS 6000	15,0	4399		696		5095	138	140		143
SP 8A-91N	MS 6000R	15,0	4399		696		5095	138	140		143
SP 8A-100	MS 6000	15,0	4777		696		5473	138	140		150
SP 8A-100N	MS 6000R	15,0	4777		696		5473	138	140		150
SP 8A-110	MS 6000	18,5	5197		751		5948	138	140		164
SP 8A-110N	MS 6000R	18,5	5197		751		5948	138	140		164

E = maximum diameter van pomp inclusief kabelafscherming en motor.

96 49 81 27 12 02	NL

Wijzigingen voorbehouden.