

# Data Sheet



Seawater  
Reverse Osmosis (RO) Membranes  
**LG SW 440 SR**

**LENNTECH**  
WATER TREATMENT SOLUTIONS

## Overview


LG Chem's NanoH<sub>2</sub>O™ seawater RO membranes, incorporated with innovative Thin Film Nanocomposite (TFN) technology, reduce the cost of desalination while delivering superior water quality. Our seawater RO membranes provide industry leading salt rejection and produce 20% more flow than membranes manufactured with conventional technologies. We continue to leverage the technological advantages of our seawater RO membranes to expand our market share, accruing more than 3,000 Million Liter per Day (MLD) projects for both new and replacement market since the establishment.

LG SW SR (Super Rejection) membranes offer the highest rejection for the best product water quality; suitable for high salinity seawater applications.

## Product Specifications

| Active Membrane Area, ft <sup>2</sup> (m <sup>2</sup> ) | Permeate flow rate, GPD (m <sup>3</sup> /d) | Stabilized Salt Rejection, % | Minimum Salt Rejection, % | Boron Rejection, % | Feed Spacer, mil |
|---------------------------------------------------------|---------------------------------------------|------------------------------|---------------------------|--------------------|------------------|
| 440 (41)                                                | 6,600 (25.0)                                | 99.85                        | 99.7                      | 93                 | 28               |

Test Conditions : 32,000 ppm NaCl, 5 ppm boron at 25°C (77°F), 800 psi (55 bar), pH 8, Recovery 8%.  
Permeate flows for individual elements may vary +/-15%.

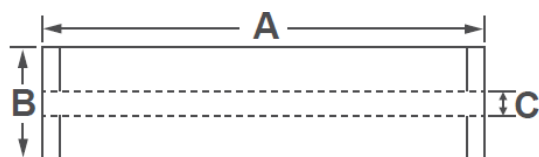

| A, mm (in.) | B, mm (in.) | C, mm (in.)  | Weight, kg (lbs.) |
|-------------|-------------|--------------|-------------------|
| 1,016 (40)  | 200 (7.9)   | 28.6 (1.125) | 16 (35)           |

All dimensional information is indicative and for reference purpose only. Please contact LG Chem for detailed technical specification.

## Operating Specifications

|                                                            |                               |
|------------------------------------------------------------|-------------------------------|
| Max. Applied pressure                                      | 1,200 psi (82.7 bar)          |
| Max. Chlorine concentration                                | < 0.1 ppm                     |
| Max. Operating temperature                                 | 45°C (113°F)                  |
| pH Range, Continuous (Cleaning)                            | 2-11 (2-13)                   |
| Max. Feedwater turbidity                                   | 1.0 NTU                       |
| Max. Feedwater SDI (15 mins)                               | 5.0                           |
| Max. Feed flow                                             | 75 gpm (17 m <sup>3</sup> /h) |
| Min. Ratio of concentrate to permeate flow for any element | 5 : 1                         |
| Max. Pressure drop (ΔP) for each element                   | 15 psi (1.0 bar)              |

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. LG Chem assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. NanoH<sub>2</sub>O is the Trademark of The LG Water Solutions or an affiliated company of LG Chem. All rights reserved. © LG Chem, Ltd.

**LENNTECH**  
WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900  
www.lennotech.com Fax. +31-152-616-289

Rev. L (10.11)  
**NanoH<sub>2</sub>O™**