

WHOLE-HOUSE WATER FILTER



AP102T

- 3/4" NPT
- 12 gpm* (45.4 lpm)
- Cold Water



AP102S

- 3/4" NPT
- 12 gpm* (45.4 lpm)
- Cold Water



Made with pride
in the U.S.A.

* Maximum Flow Rate for Housings

Aqua-Pure®

WATER FILTERS

Clearly Great Water

Models:

AP102T

AP102S

Application:

Choice of -

Sediment & Rust

Chlorine Taste & Odor

Scale

Made from **FDA***
CFR-21 Compliant Materials

* Food and Drug Administration
of USA

Features:

- ▶ Built-in "Shut-off Valve" with pressure relief.
- ▶ Pressure tested high-impact plastic design.
- ▶ High flow, dual cartridge system.
- ▶ Choice of premium performance Aqua-Pure cartridges.
- ▶ Aqua-Grip™ filter wrench included.
- ▶ Manufactured from FDA CFR-21 compliant materials.
- ▶ Choice of clear "see-through" or "opaque" filter housing.
- ▶ Complete installation manual enclosed.
- ▶ 10 Year Limited Warranty.

Benefits:


- ▶ Fast and easy cartridge changes. No additional valves required. Lower installation costs.
- ▶ Protection against pressure surges and water hammer.
- ▶ For high water demand applications; less frequent cartridge changes.
- ▶ For long life sediment & rust, high adsorption chlorine taste & odor, or scale inhibition applications.
- ▶ Fast, effortless sump removal for changing cartridges.
- ▶ Conforms to public health requirements for water purification. Suitable for drinking and cooking water and all food applications.
- ▶ See-through housing for convenient viewing of cartridge condition or U.V. resistant opaque housing for outdoor use.
- ▶ For easy reference and easy installation.
- ▶ Guaranteed system design and long-term factory support and service.

The Choice of the Professional Plumber

Specifications


Model No.	Inlet/Outlet Size	Dimensions		Approx. Weight	Clean Pressure Drop	Max. Water Temperature	Max. Water Pressure	Replacement CTG No.	Replacement CTG Qty.	Flow Rate	Degree of Filtration
		Height	Diameter								
AP102T & AP102S	3/4" NPT	24 1/4" (61.6 cm)	4 9/16" (11.6 cm)	5 lbs (2.3 kg)	< 6 psi @ 12 gpm (< 41 kPa @ 30.3 lpm)	100°F (38°C)	125 psi (862 kPa)	cartridges sold separately	2	12 gpm (45.4 lpm)	1-50 micron nominal

Capacity: Cartridges should be replaced every 4 - 6 months or sooner when noticeable pressure drop occurs.

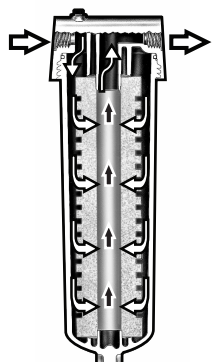

Premium Performance Filtration

"Graded-Density Cartridge Construction for Longer Life!"




Aqua-Pure® Sediment & Rust Cartridges are made from an exclusive process using pure white cellulose fibers. This unique process offers unsurpassed filtration performance.

- Longer Life
- Higher Efficiency


As water passes from outer surfaces into the center of the cartridge, the filtering pores become increasingly smaller to remove even microscopic particles! Unlike string-wound and pleated paper cartridges, the rigid sturdy construction of the Aqua-Pure cartridges are able to withstand high pressure drop and stressful conditions such as water hammer.

- Rigid Construction
- Resists Water Hammer


Graded Density

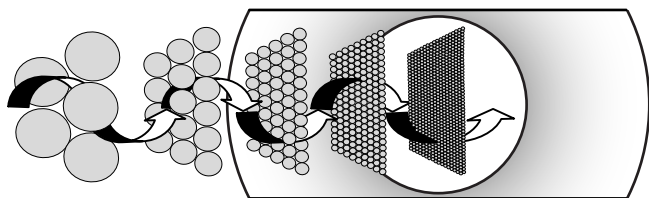

String Wound Technology

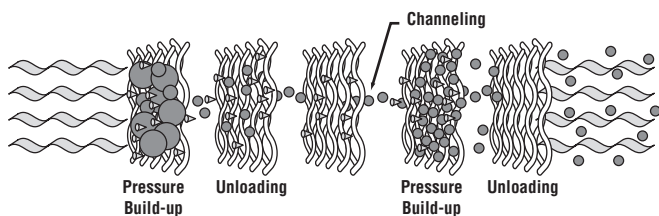

1 Aqua-Pure = up to 4 String Wound*

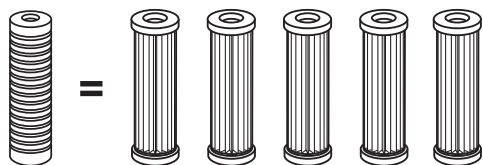


1 Aqua-Pure = up to 5 Pleated Filters*

Replacement Cartridge Options

Dirt Model	Load	Nominal Micron Rating	Application			Flow Rate Based on Two Cartridges
			Dirt/Rust	Taste/Odor	Scale	
AP1001	Extra Fine	1	•			12 gpm (45.4 lpm)
AP1003	Fine	3	•			12 gpm (45.4 lpm)
AP110	Normal	5	•			12 gpm (45.4 lpm)
AP111	Medium	25	•			12 gpm (45.4 lpm)
AP124	Heavy	50	•			12 gpm (45.4 lpm)
AP117	Normal	5	•	•		6 gpm (22.7 lpm)
APS117	Normal	5	•	•	•	6 gpm (22.7 lpm)
AP420	Normal	5	•		•	12 gpm (45.4 lpm)

Easy Installation

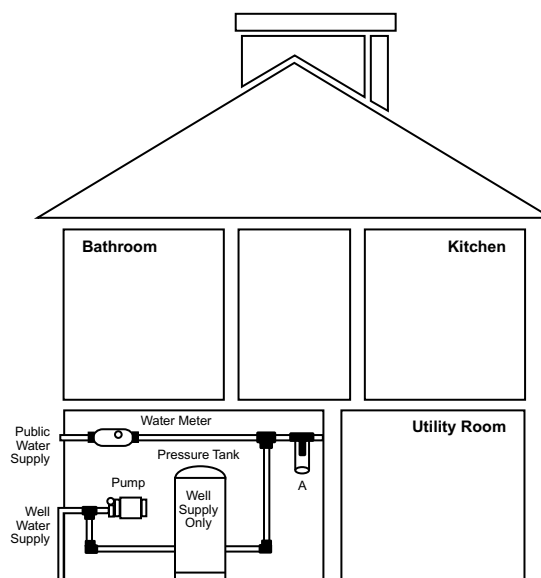

Your new **Aqua-Pure** Water Filter installs on the main cold water line after entering the home. Complete installation instructions included for your convenience.

Tools required for installation:

- Teflon® Tape
- Adjustable wrench
- Tube Cutter
- Appropriate Pipe Fittings

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Teflon is a registered trademark of E.I. DuPont.

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

Aqua-Pure
WATER FILTERS

* Typical filter life of AP124 using A.C. fine test dust retained from water at 3 gpm (11.4 lpm) to a pressure drop of 20 psig (138 kPa)

© 2002 CUNO Incorporated
LITAP102 0302