

## Lenn-CF25101 / Lenn-CF25105 / Lenn-CF251010

### MELT BLOWN CARTRIDGES

*Sediment cartridges remove dirt, sand, rust, and other suspended matter from water.*

*The coreless strength of the cartridges is achieved by sintering the many fibers into a solid matrix.*

*Cartridges are available in a wide array of sizes and micron ratings to accommodate all of your filtration needs.*



### Technical data and operational parameters:

| Parameter                                     | CF25101              | CF25105 | CF251010 |
|-----------------------------------------------|----------------------|---------|----------|
|                                               | Value                |         |          |
| Height, inch, mm                              | 10, 250±1.0          |         |          |
| Maximum outer diameter, inch, mm              | 2.5, 60±1.0          |         |          |
| Micron Rating (Nominal)                       | 1                    | 5       | 10       |
| Maximum capacity <sup>1</sup>                 | 2 700 gal (10 000 L) |         |          |
| Recommended filtration flow rate <sup>2</sup> | 2 Gpm (8 Lpm)        |         |          |
| Temperature of water, °C <sup>3</sup>         | +4...+43             |         |          |

### Materials of Construction:


- Filter material Melt Blown Polypropylene

<sup>1</sup> Actual capacity depends on the source water quality and may vary

<sup>2</sup> Do not exceed the recommended flow rate of filtration since it can lead to deterioration of treated water quality

<sup>3</sup> Cartridge is intended for purification of cold water only

The abovementioned information and technical data are relevant for products produced in 2016.

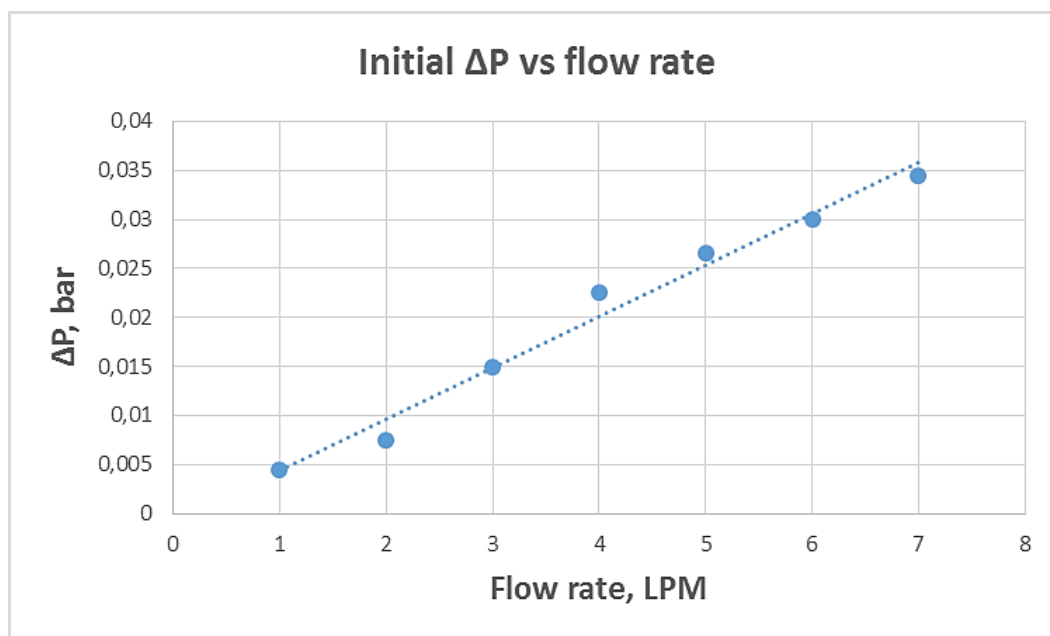

**Warning!**

Cartridges are not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the filter.

The abovementioned information and technical data are relevant for products produced in 2016.