

BIO-CEL® M+200



Submerged MBR Module for Wastewater Treatment

The BIO-CEL® MBR series is ideal for biological wastewater treatment in industrial and municipal applications. BIO-CEL MBR combines the benefits of traditional hollow fiber and plate and frame configurations without any of their inherent disadvantages. The module has an extremely high packing density due to the thin and self-supporting membrane sheets, and the laminate offers a self-healing mechanism.

MEMBRANE CHARACTERISTICS

Membrane	UV400T
Membrane Polymer	Polyvinylidene fluoride (PVDF)
Nominal Pore Size	0.06 µm
Preservative	Glycerine 20 % / Sodium benzoate 3 %

MODULE SPECIFICATIONS


Housing Material Options	Stainless Steel 1.4301/304 (V2A) On request: SS 1.4571/316Ti (V4A)
Drainage Layer	Polyester (PET)
Diffusors Material	Membrane hose: Silicone (SI) Support tube: Polypropylene (PP)
Nominal Membrane Area	200 m² (2153 ft²)

OPERATING PARAMETERS

pH Range	2.0 – 11.0
Temperature Range	5 – 40°C (41 – 104°F)
Maximum TMP during Filtration	- 400 mbar (-5.8 psi)
Maximum TMP during Regular Backwash	+150 mbar (+2.2 psi)
Recommended Air Scour Rate ^a	63 Nm³/h (37 SCFM)
Maximum Air Scour Rate ^a	80 Nm³/h (46 SCFM)
Diffusors Pressure Loss at Recommended Air Scour Rate	80 mbar (1.16 psi)
Diffusor Total Pressure Loss at Min Water Level	281 mbar (4.0 psi)
Recommended MLSS in MBR Tank	8 – 12 g/L
Maximum MLSS in MBR Tank	15 g/l
Maximum Particle Size in MBR Tank	2 mm
Total Chlorine Resistance	1,000,000 ppm•hr

^a volumetric flow rate at standard conditions according to DIN ISO 2533:1979-12.

PHYSICAL DIMENSIONS

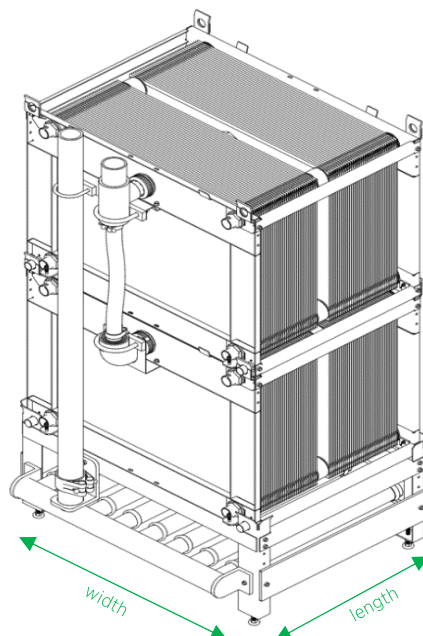

Dry Weight	250 kg (551 lbs)
Wet Weight without Solids	365 kg (805 lbs)
Maximum Load for Lifting^b	1000 kg (2205 lbs)
Length	1084 mm (3.6 ft)
Width	1221 mm (4.0 ft)
Height	2122 mm (7.0 ft)
Filtration Tank Minimal Water Level	2310 mm (7.8 ft)
Connection for Permeate	PVC-U grey pipe end 90mm diameter SDR13,6/PN16 (DN80 Flange Adapter available)
Connection for Aeration	Polypropylene pipe end 90mm diameter SDR11/PN10 (DN80 Flange Adapter available)

^b Sludge deposit must be removed before lifting unit

IMPORTANT INFORMATION

Scope of Supply, Accessories & Spare Parts:

Please see BIO-CEL M+100 – Scope of Supply, Accessories and Spare Parts (TDS-WW032).

Storage & Handling:

BIO-CEL MBR modules must be handled and stored appropriately to ensure proper operation and to prevent membrane damage. Please see BIO-CEL MBR – Storage Conditions (TB-WW002).

MANN+HUMMEL reserves the right to change specifications without prior notification.

Contacts

LENNTECH
WATER TREATMENT SOLUTIONS

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

**MANN+
HUMMEL**