

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

Overview

Copper heat-exchange coils, used in every Recold Fluid Cooler and Evaporative Condenser, provide many distinct advantages.

Primary Benefits

- Half the corrosion rate of carbon steel in closed systems, translates into potentially longer product life
- Seven times greater thermal conductivity than carbon steel, allows for smaller equipment size and less equipment weight
- Easier system circuit changes or repairs, with no welding required
- Greener product

Benefit Detail


Longer Equipment Life:

- Copper provides superior corrosion resistance, extending equipment life
- Copper maintains system efficiency better with time
- Coils can be drained as often as necessary


Greater Thermal Efficiency:

- Thermal conductivity of copper is more than seven times that of carbon steel, enhancing heat transfer
- Smaller equipment size
- Lower equipment weight

more 

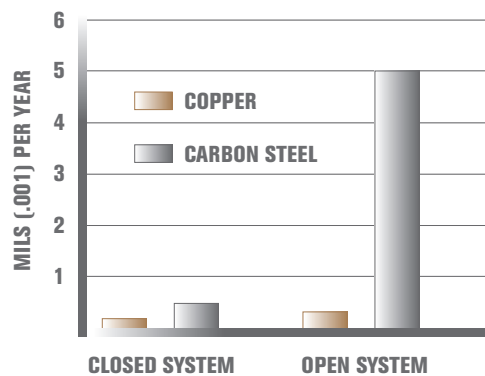

Adapted from *Standards for Corrosion Rates*, Bennett P. Boffardi, Ph.D., FNACE

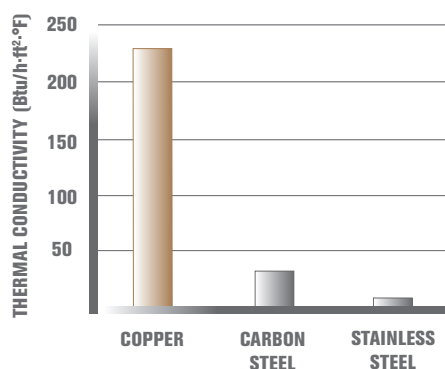

Copper Coil INSIGHT

Benefit Detail

Easier to work with:


- Copper can be brazed, unlike steel which has to be welded
- Copper coils can easily be circuited to separate multiple loads within the same unit if desired

Green material:

- Recyclable at the end of its useful life, potentially resulting in a higher salvage value per pound than steel
- Copper is naturally bacteriostatic (inhibits bacteria growth)
- Less process fluids required because less heat transfer surface is needed for the same amount of cooling


History

- Recold has manufactured heat exchange equipment serving refrigeration, HVAC, and industrial applications for over 75 years. For the best value in evaporative cooling equipment, insist on a Recold heat transfer coil made from copper.

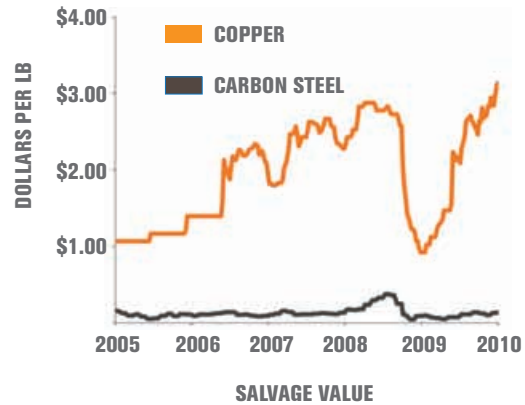

Key Contacts

- Refrigeration applications: Mike Lloyd
mike.lloyd@spx.com
- HVAC applications: Jon Walker
jon.walker@spx.com

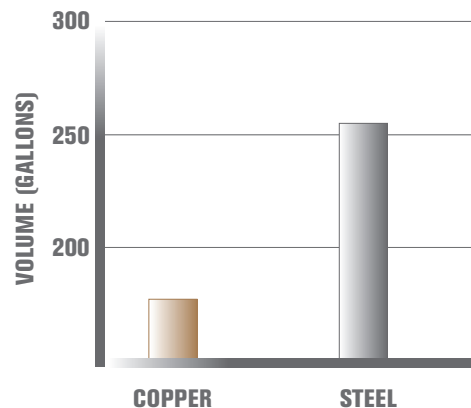

Internal coil volume typical of a 100 ton forced-draft fluid cooler

SPX®

| spxcooling@spx.com | spxcooling.com

Contact your Marley Sales Representative at spxcooling.com/en/sales/

In the interest of technological progress, all products are subject to design and/or material change without notice.
©2011 SPX Cooling Technologies, Inc. | Printed in USA

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

IN-RC-10