

Micro-Wynd II Blanket Media Filter Cartridges



Better By Design...

- **Enhanced Removal Efficiency**
- **Superior Capacity for Long Life**
- **Wide Range of Removal Ratings**
- **CFR21 Compliant Materials**


The Micro-Wynd® II filter cartridge is a major advance in blanketed filter technology. By combining an enhanced open wind process with an internal media blanket, the Micro-Wynd II provides superior flow rates, greater filtration efficiency, and consistent filtration characteristics from cartridge to cartridge, lot to lot.

The superior performance is a direct result of the advanced winding pattern of the yarn matrix combined with CUNO's exclusive patented process of separately applying a tailored media "blanket" between successive layers of yarn. This winding pattern creates much larger diamond shaped contaminant holding chambers. The separately inserted blanket encloses the chambers and maintains the consistency and integrity of filtration. These two factors combine to achieve a balance of filtration characteristics *impossible to obtain with ordinary wound filter cartridges* with teased or brushed up random fibers on the yarn to produce a filtering media.

The Micro-Wynd II winding pattern also provides less restriction than the patterns common to ordinary wound cartridges. Consequently, it is not unusual for Micro-Wynd II filter cartridge to provide up to 2 ½ times more open area, enhancing the flow rate by up to 500% for the same pressure drop (see Graph 1 on the following page).

Features	Benefits
■ Blanket media filter cartridge	■ Higher filtration efficiency at the selected rating
■ CFR 21 listed materials of construction	■ Suitable for food & beverage, and other regulated applications
■ Graded density construction	■ Very low pressure drop and high flow rates
■ Low extractable levels	■ Longer filter life and more cost effective filtration
■ Integral lengths from 9 7/8" To 40"	■ Suitable for water, electronics and electroplating
■ Choice of construction materials	■ Eliminates joints that cause blinding or by-pass
■ High dirt holding capacity	■ Easy to install and remove
■ Wide variety of end fittings	■ Ensures process and system compatibility
■ Cleaner, more durable construction	■ Reduces filter change-outs
	■ Suitable for all filter housings
	■ Less media migration than conventional wound cartridges


Micro-Wynd II - Better By Design

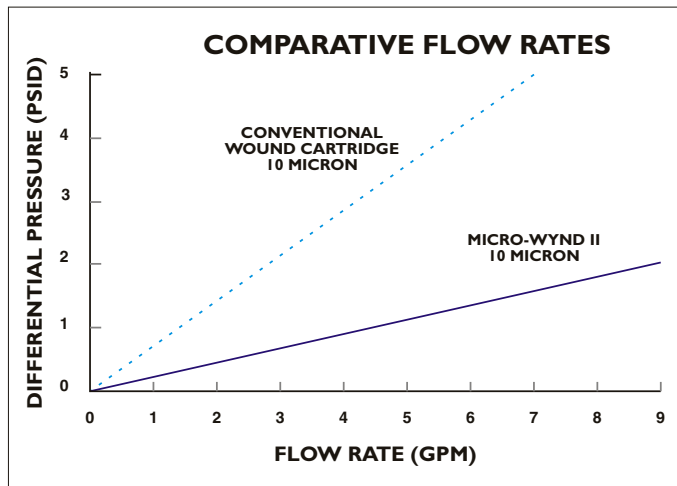

GRAPH 1. - FLOW COMPARISON

Micro-Wynd II is a blanket media cartridge offering true graded density, with more open filtration on the outside of the filter and fine, more efficient filtration, on the inner layer of the cartridge. Blinding of the filtration surfaces by large particles is minimized and cartridge life extended. Lower cartridge replacement costs are achieved as demonstrated in Graph 2.

Micro-Wynd II filter cartridges, with nominal ratings from 0.5 to 350 microns, are available with various media, matrix, and core materials to ensure compatibility with your process. Standard materials include cotton yarn/cotton media blanket for use in applications involving water, alcohol, and other polar liquids. Cotton materials are CFR 21 compliant for use with potable water, food, and beverage products.

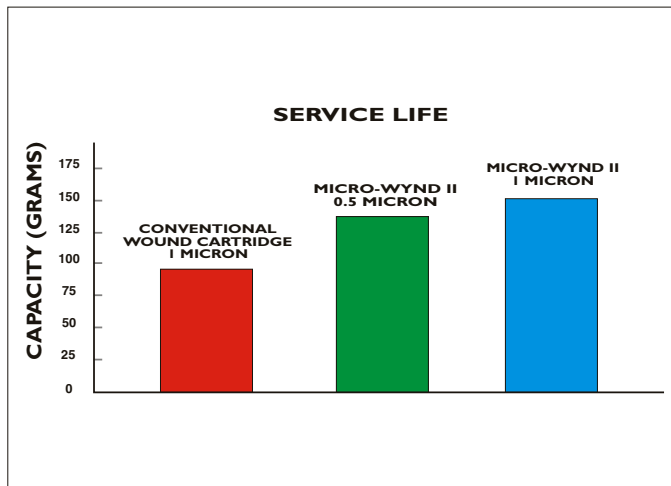

GRAPH 2. - SERVICE LIFE


The polypropylene yarn/polypropylene media blanket configuration, also CFR 21 compliant, is excellent for use with acids, alkalis, strong oxidizing and reducing agents, and other chemicals in aqueous solutions.

Cartridge Disposal


Micro-Wynd II cartridges can be incinerated or shredded when configured with polypropylene cores. Metal cores can be crushed by high pressure techniques after media incineration. Other methods may be more economical when using metal cores.

Configurations

Cartridges can be configured with tinned steel, stainless steel, or polypropylene cores. The use of various core materials provide an advanced range of compatibility.

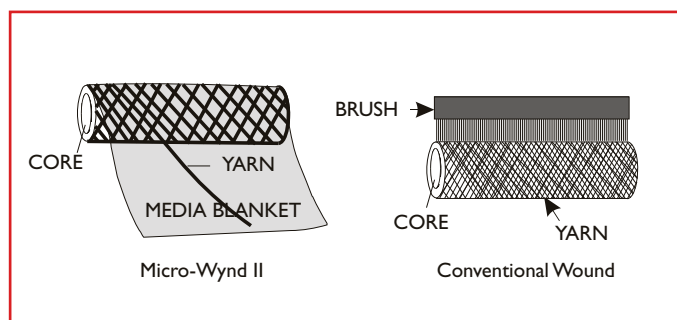

The Micro-Wynd II media blanket is superior to the brushing method of conventional wound cartridges that breaks the yarn fibers resulting in media migration. The media blanket produces greater filtration efficiency, increased contaminant holding capacity, and substantially cleaner filtration.

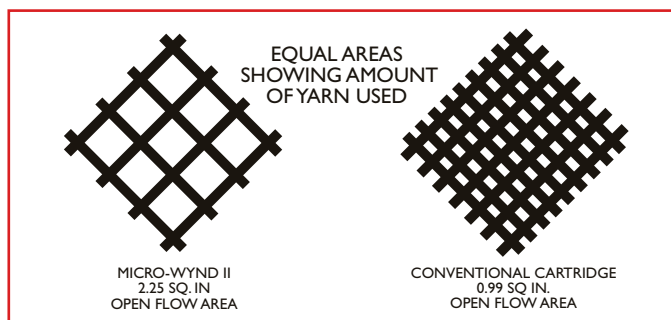

The Micro-Wynd II winding pattern combined with the media blanket produces a more rigid structure and reduces the restriction caused by the yarn. This results in an enhanced flow of up to 500%, in turn reducing the size and cost of filtration hardware!

Micro-Wynd II - Better By Design

Table 1 lists the various configurations for Micro-Wynd II filters. Micro-Wynd II cartridges can be configured with various end-treatments and o-ring materials to fit competitive filter housings (see Ordering Guide on back).

MICRON RATING	TINNED STEEL	304 SS CORE	316 SS CORE	POLYPROPYLENE CORE
POLYPROPYLENE MEDIA BLANKET/YARN CARTRIDGES (150°F)				
0.5	D-PPFZ	D-PPSZ	D-PPTZ	D-PPPZ
1	D-PPFY	D-PPSY	D-PPTY	D-PPPY
3	D-PPFA	D-PPSA	D-PPTA	D-PPPA
5	D-PPFB	D-PPSB	D-PPTB	D-PPPB
10	D-PPFC	D-PPSC	D-PPTC	D-PPPC
25	D-PPFF	D-PPSF	D-PPTF	D-PPPF
50	D-PPFL	D-PPSL	D-PPTL	D-PPPL
75	D-PPFQ	D-PPSQ	D-PPTQ	D-PPPQ
100	D-PPFV	D-PPSV	D-PPTV	D-PPPV
350	D-PPFW	D-PPSW	D-PPTW	D-PPPW
COTTON MEDIA BLANKET/YARN CARTRIDGES				
	(250°F)		(150°F)	
0.5	D-CCFZ	D-CCSZ	D-CCTZ	D-CCPZ
1	D-CCFY	D-CCSY	D-CCTY	D-CCPY
3	D-CCFA	D-CCSA	D-CCTA	D-CCPA
5	D-CCFB	D-CCSB	D-CCTB	D-CCPB
10	D-CCFC	D-CCSC	D-CCTC	D-CCPC
25	D-CCFF	D-CCSF	D-CCTF	D-CCPF
50	D-CCFL	D-CCSL	D-CCTL	D-CCPL
75	D-CCFQ	D-CCSQ	D-CCTQ	D-CCPQ
100	D-CCFV	D-CCSV	D-CCTV	D-CCPV
350	D-CCFW	D-CCSW	D-CCTW	D-CCPW

TABLE 1. - CARTRIDGE CONFIGURATIONS



Micro-Wynd II Cartridge Configurations

Cartridge Flow Rates

Aqueous Flow Rates - Micro-Wynd II cartridges exhibit excellent flow performance. For good filter practice, the flow values listed in Table 2, by grade designation, are recommended for maximum service life.

GRADE	FLOW RATE *(gpm)
Z	2
Y	2
A	3
B,C	4
F,L,Q,V,W	5

* Flow rates are for single length cartridges (9 7/8 - 10")

TABLE 2. - AQUEOUS FLOW RATES

Non Aqueous Flow Rates - Calculate using the formula in conjunction with the values shown in Table 3. The specific pressure drop values may be effectively used when three of the four variables (Viscosity, Flow, Differential Pressure, and Cartridge Grade) are set.

$$\Delta p = \frac{\left(\frac{\text{Total system}}{\text{gpm [lpm]}} \right) \left(\frac{\text{Viscosity in}}{\text{cst}} \right) \left(\frac{\text{Value from}}{\text{table}} \right)}{\left(\frac{\text{Number of}}{\text{Equivalent Single Length Cartridges}} \right) \left(\frac{\text{in housing}}{\text{in housing}} \right)}$$

Grade	Nominal Rating (µm)	Specific Pressure Drop per 10" Cartridge *			
		Polypropylene Media		Cotton Media	
		psid/gpm /cst	mbar/lpm/cst	psid/gpm /cst	mbar/lpm/cst
Z	0.5	0.21	3.84	0.62	11.20
Y	1	0.14	2.55	0.47	8.62
A	3	0.10	1.86	0.39	7.10
B	5	0.04	0.71	0.17	3.12
C	10	0.03	0.49	0.08	1.49
F	25	0.02	0.33	0.05	0.93
L	50	0.010	0.19	0.03	0.47
Q	75	0.008	0.15	0.013	0.24
V	100	0.005	0.10	0.011	0.20
W	350	0.004	0.08	0.006	0.11

* Specific pressure drop at ambient temperature for a single length equivalent (10") cartridge. Table values are shown for liquids with kinematic viscosity equal to 1.0. Kinematic viscosity in centistokes (cst) can be calculated by dividing the viscosity in centipoise by the specific gravity of the fluid. For multiple cartridge lengths, divide the total flow by the number of equivalent lengths.

TABLE 3. - MICRO-WYND II FLOW RATES

Micro-Wynd II - *Better By Design*

Micro-Wynd II Ordering Guide

For SOE Cartridges, otherwise leave blank

Basic Catalog Number	Media Blanket	Matrix	Core Material	Grade Designation		Nominal Cartridge Length		End Modification*	O-Ring Material
				Grade	Nominal Rating (μ)	Code	Length (in.)		
D - No Extended Core	C - Cotton	C - Cotton	P - Polypropylene	Z	0.5	1**	9 7/8"	C - Code 8 Double O-Ring Connector & Spear	A - Silicone
S - 316 S.S. Extended Core	P - Polypropylene	P - Polypropylene	F - Tinned Steel	Y	1	2	19 1/2"		B - Fluorocarbon
P - Polypropylene Extended Core			S - 304 S.S.	A	3	2x	20"	F - Code 3 Double O-Ring Connector & Flat Cap	C - EPR
			T - 316 S.S.	B	5	3	29 1/4"		D - Nitrile
				C	10	3x	30"		
				F	25	4	39"		
				L	50	4x	40"		
				Q	75				
				V	100				
				W	350				

Option: For voile covered core, insert the letter V before the grade designation

* End Modification Requires use of the polypropylene core

** Fits 9 3/4" and 10" housings

WARRANTY

Seller warrants its equipment against defects in workmanship and material for a period of 12 months from date of shipment from the factory under normal use and service and otherwise when such equipment is used in accordance with instructions furnished by Seller and for purposes disclosed in writing at the time of purchase, if any. Any unauthorized alteration or modification of the equipment by Buyer will void this warranty. Seller's liability under this warranty shall be limited to the replacement or repair, F.O.B. point of manufacture, of any defective equipment or part which, having been returned to the factory, transportation charges prepaid, has been inspected and determined by the Seller to be defective. THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EITHER EXPRESSED OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR ANY OTHER MATTER. Under no circumstances shall Seller be liable to Buyer or any third party for any loss of profits or other direct or indirect costs, expenses, losses or consequential damages arising out of or as a result of any defects in or failure of its products or any part or parts thereof or arising out of or as a result of parts or components incorporated in Seller's equipment but not supplied by the Seller.

Your Area Distributor is:

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289



[illegible]

DCCP2K4XC	DCCPY4KXC	DCCPA4KXC	DCCPB4KXC	DCCPC4KXC	DCCPD4KXC	DCCPE4KXC	DCCPF4KXC	DCCPG4KXC	DCCPH4KXC	DCCPI4KXC	DCCPJ4KXC	DCCPK4KXC	DCCPL4KXC	DCCPM4KXC	DCCPN4KXC	DCCPO4KXC	DCCPP4KXC	DCCPV4KXC	DCCPW4KXC	DCCPX4KXC	DCCPY4KXC	DCCPZ4KXC
DCCP2K4XF	DCCPY4XF	DCCPA4XF	DCCPB4XF	DCCPC4XF	DCCPD4XF	DCCPE4XF	DCCPF4XF	DCCPG4XF	DCCPH4XF	DCCPI4XF	DCCPJ4XF	DCCPK4XF	DCCPL4XF	DCCPM4XF	DCCPN4XF	DCCPO4XF	DCCPP4XF	DCCPV4XF	DCCPW4XF	DCCPX4XF	DCCPY4XF	DCCPZ4XF
DCCP2K4FC	DCCPY4FC	DCCPA4FC	DCCPB4FC	DCCPC4FC	DCCPD4FC	DCCPE4FC	DCCPF4FC	DCCPG4FC	DCCPH4FC	DCCPI4FC	DCCPJ4FC	DCCPK4FC	DCCPL4FC	DCCPM4FC	DCCPN4FC	DCCPO4FC	DCCPP4FC	DCCPV4FC	DCCPW4FC	DCCPX4FC	DCCPY4FC	DCCPZ4FC
DCCP21CXA	DCCPY1CX	DCCPA1CX	DCCPB1CX	DCCPC1CX	DCCPD1CX	DCCPE1CX	DCCPF1CX	DCCPG1CX	DCCPH1CX	DCCPI1CX	DCCPJ1CX	DCCPK1CX	DCCPL1CX	DCCPM1CX	DCCPN1CX	DCCPO1CX	DCCPP1CX	DCCPV1CX	DCCPW1CX	DCCPX1CX	DCCPY1CX	DCCPZ1CX
DCCP21C1C	DCCPY1C1	DCCPA1C1	DCCPB1C1	DCCPC1C1	DCCPD1C1	DCCPE1C1	DCCPF1C1	DCCPG1C1	DCCPH1C1	DCCPI1C1	DCCPJ1C1	DCCPK1C1	DCCPL1C1	DCCPM1C1	DCCPN1C1	DCCPO1C1	DCCPP1C1	DCCPV1C1	DCCPW1C1	DCCPX1C1	DCCPY1C1	DCCPZ1C1
DCCP21C1D	DCCPY1C1D	DCCPA1C1D	DCCPB1C1D	DCCPC1C1D	DCCPD1C1D	DCCPE1C1D	DCCPF1C1D	DCCPG1C1D	DCCPH1C1D	DCCPI1C1D	DCCPJ1C1D	DCCPK1C1D	DCCPL1C1D	DCCPM1C1D	DCCPN1C1D	DCCPO1C1D	DCCPP1C1D	DCCPV1C1D	DCCPW1C1D	DCCPX1C1D	DCCPY1C1D	DCCPZ1C1D
DCCP21F1A	DCCPY1FA	DCCPA1FA	DCCPB1FA	DCCPC1FA	DCCPD1FA	DCCPE1FA	DCCPF1FA	DCCPG1FA	DCCPH1FA	DCCPI1FA	DCCPJ1FA	DCCPK1FA	DCCPL1FA	DCCPM1FA	DCCPN1FA	DCCPO1FA	DCCPP1FA	DCCPV1FA	DCCPW1FA	DCCPX1FA	DCCPY1FA	DCCPZ1FA
DCCP21F1B	DCCPY1FB	DCCPA1FB	DCCPB1FB	DCCPC1FB	DCCPD1FB	DCCPE1FB	DCCPF1FB	DCCPG1FB	DCCPH1FB	DCCPI1FB	DCCPJ1FB	DCCPK1FB	DCCPL1FB	DCCPM1FB	DCCPN1FB	DCCPO1FB	DCCPP1FB	DCCPV1FB	DCCPW1FB	DCCPX1FB	DCCPY1FB	DCCPZ1FB
DCCP21F1C	DCCPY1FC	DCCPA1FC	DCCPB1FC	DCCPC1FC	DCCPD1FC	DCCPE1FC	DCCPF1FC	DCCPG1FC	DCCPH1FC	DCCPI1FC	DCCPJ1FC	DCCPK1FC	DCCPL1FC	DCCPM1FC	DCCPN1FC	DCCPO1FC	DCCPP1FC	DCCPV1FC	DCCPW1FC	DCCPX1FC	DCCPY1FC	DCCPZ1FC
DCCP21F1D	DCCPY1FD	DCCPA1FD	DCCPB1FD	DCCPC1FD	DCCPD1FD	DCCPE1FD	DCCPF1FD	DCCPG1FD	DCCPH1FD	DCCPI1FD	DCCPJ1FD	DCCPK1FD	DCCPL1FD	DCCPM1FD	DCCPN1FD	DCCPO1FD	DCCPP1FD	DCCPV1FD	DCCPW1FD	DCCPX1FD	DCCPY1FD	DCCPZ1FD
DCCP22C1A	DCCPY2CA	DCCPA2CA	DCCPB2CA	DCCPC2CA	DCCPD2CA	DCCPE2CA	DCCPF2CA	DCCPG2CA	DCCPH2CA	DCCPI2CA	DCCPJ2CA	DCCPK2CA	DCCPL2CA	DCCPM2CA	DCCPN2CA	DCCPO2CA	DCCPP2CA	DCCPV2CA	DCCPW2CA	DCCPX2CA	DCCPY2CA	DCCPZ2CA
DCCP22C1B	DCCPY2CB	DCCPA2CB	DCCPB2CB	DCCPC2CB	DCCPD2CB	DCCPE2CB	DCCPF2CB	DCCPG2CB	DCCPH2CB	DCCPI2CB	DCCPJ2CB	DCCPK2CB	DCCPL2CB	DCCPM2CB	DCCPN2CB	DCCPO2CB	DCCPP2CB	DCCPV2CB	DCCPW2CB	DCCPX2CB	DCCPY2CB	DCCPZ2CB
DCCP22C1C	DCCPY2CC	DCCPA2CC	DCCPB2CC	DCCPC2CC	DCCPD2CC	DCCPE2CC	DCCPF2CC	DCCPG2CC	DCCPH2CC	DCCPI2CC	DCCPJ2CC	DCCPK2CC	DCCPL2CC	DCCPM2CC	DCCPN2CC	DCCPO2CC	DCCPP2CC	DCCPV2CC	DCCPW2CC	DCCPX2CC	DCCPY2CC	DCCPZ2CC
DCCP22C1D	DCCPY2CD	DCCPA2CD	DCCPB2CD	DCCPC2CD	DCCPD2CD	DCCPE2CD	DCCPF2CD	DCCPG2CD	DCCPH2CD	DCCPI2CD	DCCPJ2CD	DCCPK2CD	DCCPL2CD	DCCPM2CD	DCCPN2CD	DCCPO2CD	DCCPP2CD	DCCPV2CD	DCCPW2CD	DCCPX2CD	DCCPY2CD	DCCPZ2CD
DCCP22F1A	DCCPY2FA	DCCPA2FA	DCCPB2FA	DCCPC2FA	DCCPD2FA	DCCPE2FA	DCCPF2FA	DCCPG2FA	DCCPH2FA	DCCPI2FA	DCCPJ2FA	DCCPK2FA	DCCPL2FA	DCCPM2FA	DCCPN2FA	DCCPO2FA	DCCPP2FA	DCCPV2FA	DCCPW2FA	DCCPX2FA	DCCPY2FA	DCCPZ2FA
DCCP22F1B	DCCPY2FB	DCCPA2FB	DCCPB2FB	DCCPC2FB	DCCPD2FB	DCCPE2FB	DCCPF2FB	DCCPG2FB	DCCPH2FB	DCCPI2FB	DCCPJ2FB	DCCPK2FB	DCCPL2FB	DCCPM2FB	DCCPN2FB	DCCPO2FB	DCCPP2FB	DCCPV2FB	DCCPW2FB	DCCPX2FB	DCCPY2FB	DCCPZ2FB
DCCP22F1C	DCCPY2FC	DCCPA2FC	DCCPB2FC	DCCPC2FC	DCCPD2FC	DCCPE2FC	DCCPF2FC	DCCPG2FC	DCCPH2FC	DCCPI2FC	DCCPJ2FC	DCCPK2FC	DCCPL2FC	DCCPM2FC	DCCPN2FC	DCCPO2FC	DCCPP2FC	DCCPV2FC	DCCPW2FC	DCCPX2FC	DCCPY2FC	DCCPZ2FC
DCCP22F1D	DCCPY2FD	DCCPA2FD	DCCPB2FD	DCCPC2FD	DCCPD2FD	DCCPE2FD	DCCPF2FD	DCCPG2FD	DCCPH2FD	DCCPI2FD	DCCPJ2FD	DCCPK2FD	DCCPL2FD	DCCPM2FD	DCCPN2FD	DCCPO2FD	DCCPP2FD	DCCPV2FD	DCCPW2FD	DCCPX2FD	DCCPY2FD	DCCPZ2FD
DCCP22X1A	DCCPY2XA	DCCPA2XA	DCCPB2XA	DCCPC2XA	DCCPD2XA	DCCPE2XA	DCCPF2XA	DCCPG2XA	DCCPH2XA	DCCPI2XA	DCCPJ2XA	DCCPK2XA	DCCPL2XA	DCCPM2XA								

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

lenntech B.V.	Rotterdamseweg 402	2629HH Delft	Netherlands
T +31-15-261.09.00			
F +31-15-261.62.89			
info@lenntech.com			
www.lenntech.com			