


SPIRA-CEL[®] Data Sheet

- Modules for Nanofiltration -

OX-NP-4040 Series

Modules for Environmental and Industrial Applications

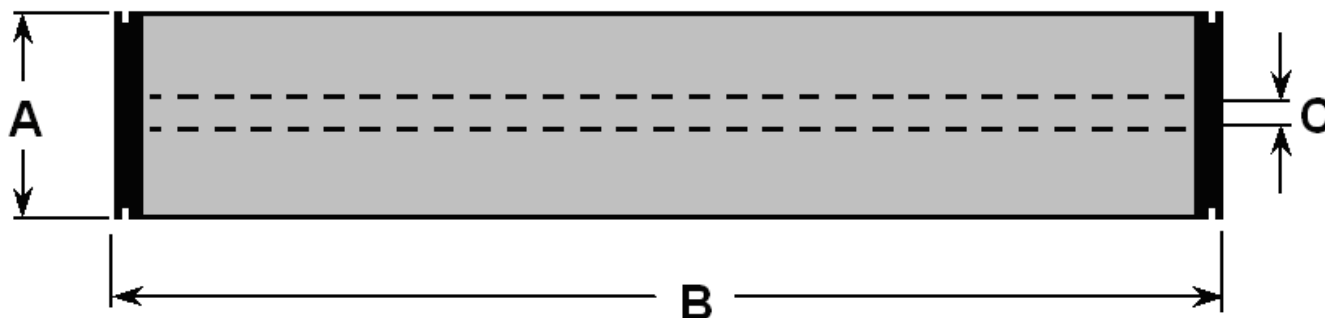

Module				
		A	B	C
		Ø Outside Module	Length Module	Ø Inside Permeate tube
Dimension	mm	101.5	1016	16.0
Tolerance	mm	+0 / -2	+1 / -3	± 0.1

Membrane		
NADIR [®] membrane type	NP010	NP030
Membrane material	PES	PES

Module specs & data				
Spacer type		Diamond	Diamond	Parallel
Spacer thickness	mil / mm	30 / 0.8	44 / 1.1	44 / 1.1
Membrane area	m²	7.6	6.3	6.3
Outer wrap		Industry hard shell		

Recommended operating conditions				
Prefiltration	µm	≤ 50	≤ 75	≤ 75
Cross flow ⁽¹⁾	m ³ /h	4 - 8	6 - 10	6 - 10
Permeate pressure	bar	0	0	0

Allowable operating conditions				
Feed pressure, max.	bar	40	40	40
Retentate pressure, min.	bar	0.7	0.7	0.7
Transmembrane pressure, max.	bar	40	40	40
Permeate pressure, max.	bar	0.35	0.35	0.35
Pressure loss per module, max. (Δp _{max}), 5 - 50 °C	bar	2	2	2
Pressure loss per module, max. (Δp _{max}), 50 - 65 °C	bar	1.3	1.3	1.3
Pressure loss per module, max. (Δp _{max}), 65 - 80 °C	bar	0.5	0.5	0.5
Pressure loss per housing, max. at 80 °C	bar	2	2	2
Processing temperature	°C	5 - 80	5 - 80	5 - 80
pH range during filtration		3 - 14	3 - 14	3 - 14
pH range during CIP		2 - 14	2 - 14	2 - 14
Disinfection with chlorine ⁽²⁾	ppmh	35.000	35.000	35.000

¹⁾ for water at 25 °C / ⁽²⁾ at 200 ppm chlorine, 30 - 50 °C and pH > 11 for max. 30 min/day

Note:

Not all combinations are available. Please do not hesitate to contact MICRODYN-NADIR for any further information.

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
We reserve the right to change specifications without prior notification.

LENNTECH
info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289



SPIRA-CEL[®] Data Sheet

- Modules for Nanofiltration -

OX-NP-4040 Series

Changes:

The here printed values may be subject to changes. Presently valid are the values on the data sheet shown on web site www.microdyn-nadir.com.

Tolerances:

The tolerances indicated on our data sheets are composed to the best of our knowledge.

Warranty:

Stated warranties are valid if values on this data sheet are followed during use of the module(s) only. Also rules for installation, cleaning, water and preservation have to be adhered to and log registered made available for MICRODYN-NADIR on request. MICRODYN-NADIR approved cleaning detergent, anti-foam, polymers, other chemicals and filter-aids lubricants can be applied only.

First Cleaning:

MICRODYN-NADIR modules may be put into production after having gone through the first cleaning prescribed by MICRODYN-NADIR on product packing notes or given differently by MICRODYN-NADIR.

MICRODYN-NADIR behält sich das Recht vor,
Angaben ohne vorherige Ankündigung
anzupassen.
We reserve the right to change specifications
without prior notification.

LENNTECH
info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

