

Product Data Sheet

DIAION™ PA312LOH

DIAION™ PA312LOH is a porous type strongly basic anion exchange resin. It has a 6% cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing pure water and waste water treatment. is recommended.

Product

Grade Name	DIAION™ PA312LOH
Type	Strong Base Anion
Matrix	Styrene-DVB, Porous
Functional Group	Type I (trimethyl ammonium groups)
Ionic Form	OH ⁻

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	0.9 min.
Water Content	%	58 - 68
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 425 μm	%	5 max.
Effective Size	mm	0.45 min.
Uniformity Coefficient	-	1.6 max.
Ionic Form Conversion OH Form	eq%	90 min.

Typical Properties

Shipping Density	g/L	680
Mean Particle Size	μm	700
Ionic Form Conversion CO ₃ Form	eq%	2.3
Ionic Form Conversion Cl Form	eq%	0.27
Particle Density	g/mL	1.08
Total Swelling (Cl ⁻ to OH ⁻)	%	23



Product Data Sheet

DIAION™ PA312LOH**Recommended Operating Conditions**

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10



DIAION™ PA312LOH

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ PA312LOH resin in normal down flow operation is shown in the graphs below.

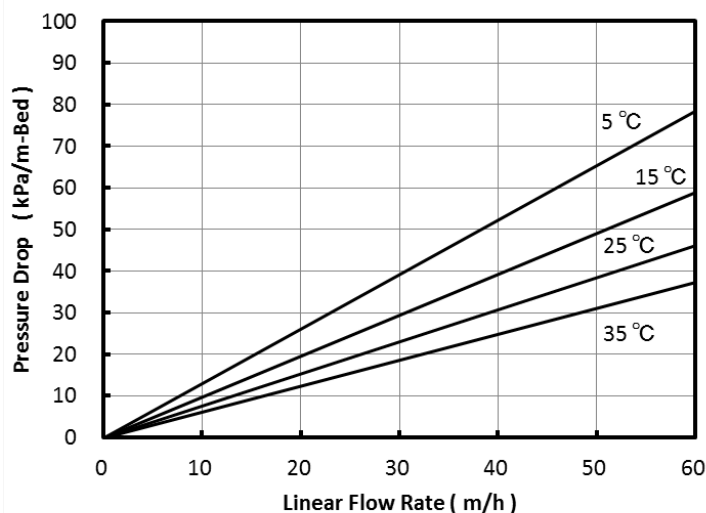


Fig. 1 Pressure Drop of PA312LOH

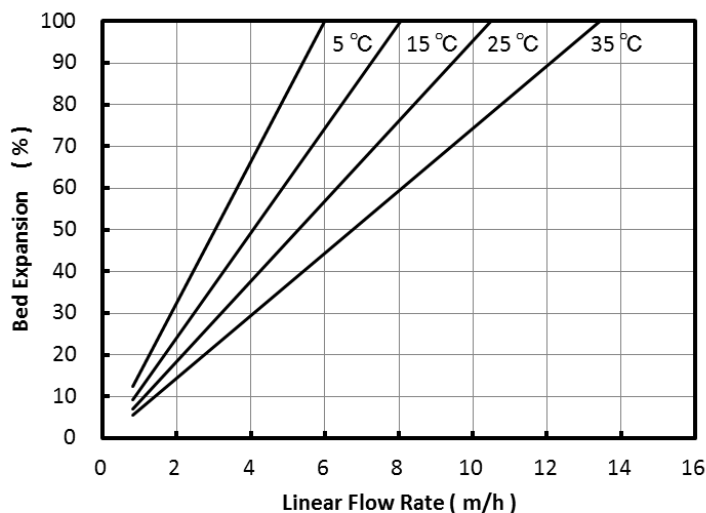


Fig. 2 Bed Expansion of PA312LOH

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.