

Product Data Sheet

DIAION™ PA312LTU

DIAION™ PA312LTU is a porous type strongly basic anion exchange resin. It has a 6% cross-linkages and excellent properties. It is recommended for higher purity water treatment application.

Product

Grade Name	DIAION™ PA312LTU
Type	Strong Base Anion
Matrix	Styrene-DVB, Porous
Functional Group	Type I (trimethyl ammonium groups)
Ionic Form	OH ⁻

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	0.85 min.
Water Content	%	58 - 68
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 425 μm	%	5 max.
Effective Size	mm	0.42 min.
Uniformity Coefficient	-	1.6 max.
Ionic Form Conversion OH Form	eq%	80 min.
Ionic Form Conversion CO ₃ Form	eq%	15 max.
Ionic Form Conversion Cl Form	eq%	0.2 max.
Outlet ΔTOC	ppb	10 max.
Outlet Resistivity	MΩ·cm	15 min.

Typical Properties

Shipping Density	g/L	650
Mean Particle Size	μm	690
Particle Density	g/mL	1.08
Total Swelling (Cl ⁻ to OH ⁻)	%	23

**LENNTECH**

info@lenntech.com Tel.+31-152-610-900

www.lenntech.com Fax.+31-152-616-289

Product Data Sheet

DIAION™ PA312LTU**Recommended Operating Conditions**

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ PA312LTU resin in normal down flow operation is shown in the graphs below.

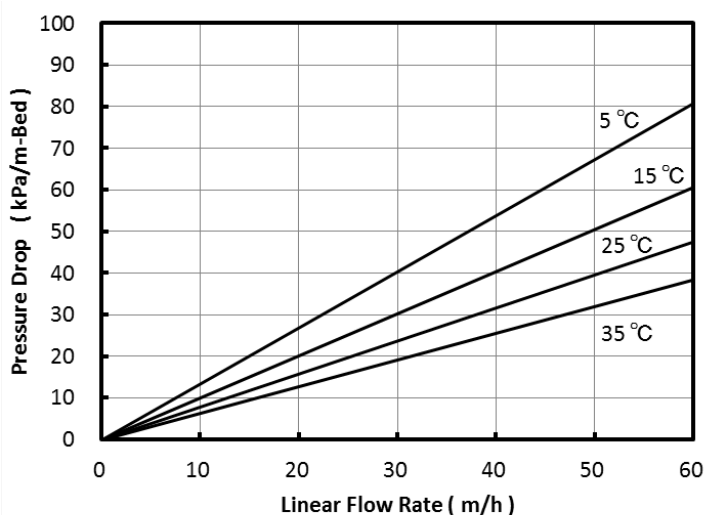


Fig. 1 Pressure Drop of PA312LTU

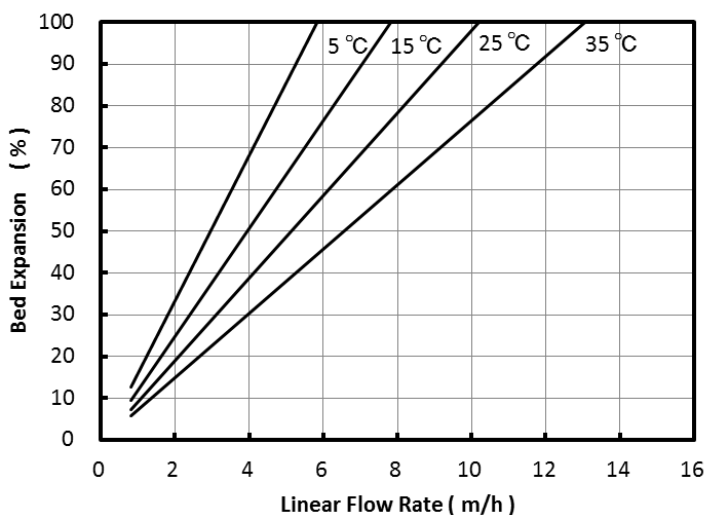


Fig. 2 Bed Expansion of PA312LTU

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.