

Product Data Sheet

DIAION™ PK228LH

DIAION™ PK228LH is a porous type strongly acidic cation exchange resin. It has 14% cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water and catalysts, is recommended.

Product

Grade Name	DIAION™ PK228LH
Type	Strong Acid Cation
Matrix	Styrene-DVB, Porous
Functional Group	Sulfonic Acid
Ionic Form	H ⁺

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.9 min.
Water Content	%	39 - 49
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 425 μm	%	1 max.
Effective Size	mm	0.45 min.
Uniformity Coefficient	-	1.6 max.
Ionic Form Conversion H Form	eq%	95 min.

Typical Properties

Shipping Density	g/L	770
Mean Particle Size	μm	740
Particle Density	g/mL	1.26
Total Swelling (Na ⁺ to H ⁺)	%	5

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		HCl
		H ₂ SO ₄
Regenerant Concentration	%	HCl 4 - 10
		H ₂ SO ₄ 1 - 4
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 10
Total Rinse Requirement	BV	2 - 10



DIAION™ PK228LH

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ PK228LH resin in normal down flow operation is shown in the graphs below.

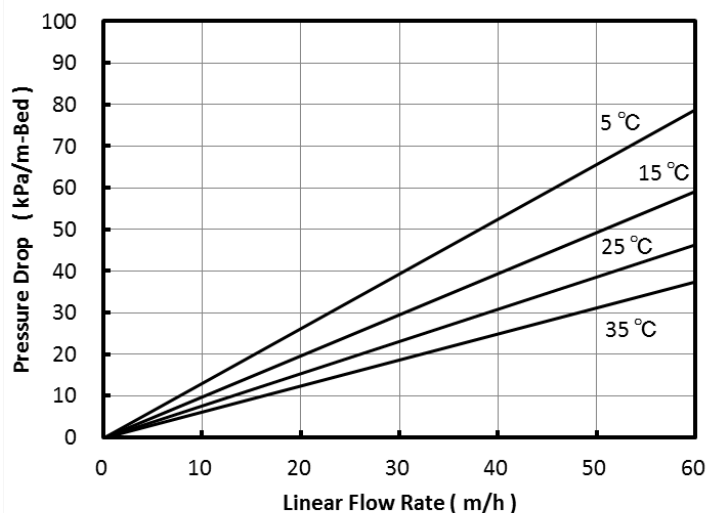


Fig. 1 Pressure Drop of PK228LH

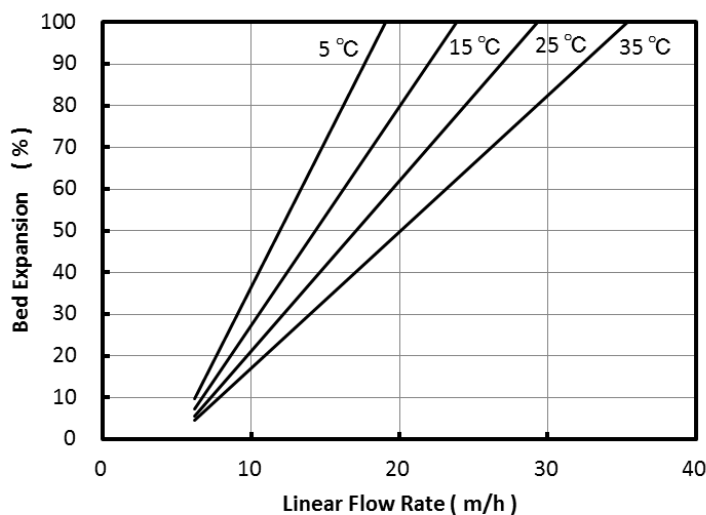


Fig. 2 Bed Expansion of PK228LH

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



LENNTECH

info@lenntech.com Tel.+31-152-610-900

www.lenntech.com Fax.+31-152-616-289