

Product Data Sheet

DIAION™ SAF10DL

DIAION™ SAF10DL is a gel type strongly basic anion exchange resin. It has a higher crosslinkages and low-odor and low reachable properties. A wide range of applications, especially in a field of manufacturing drinking water and refining sugar liquors, is recommended.

Product

Grade Name	DIAION™ SAF10DL
Type	Strong Base Anion
Matrix	Styrene-DVB, Gel
Functional Group	Type I (trimethyl ammonium groups)
Ionic Form	Cl ⁻

Specification

Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	1.3 min.
Water Content	%	39 - 47
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 500 μm	%	1 max.
Effective Size	mm	0.50 min.
Uniformity Coefficient	-	1.6 max.
Outlet ΔTOC	ppb	200 max.

Typical Properties

Shipping Density	g/L	690
Mean Particle Size	μm	670
Particle Density (Cl ⁻)	g/mL	1.08
Total Swelling (Cl ⁻ to OH ⁻)	%	22

Recommended Operating Conditions

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10

**LENNTECH**

info@lennotech.com Tel.+31-152-610-900

www.lennotech.com Fax.+31-152-616-289

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ SAF10DL (Cl form) resin in normal down flow operation is shown in the graphs below.

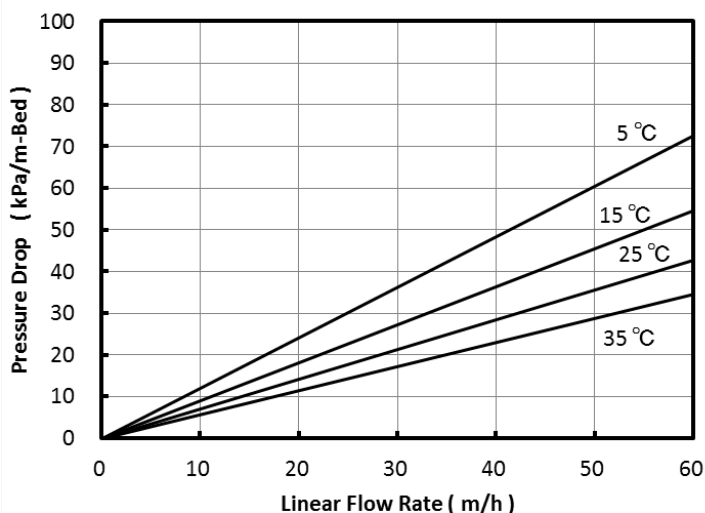


Fig. 1 Pressure Drop of SAF10DL

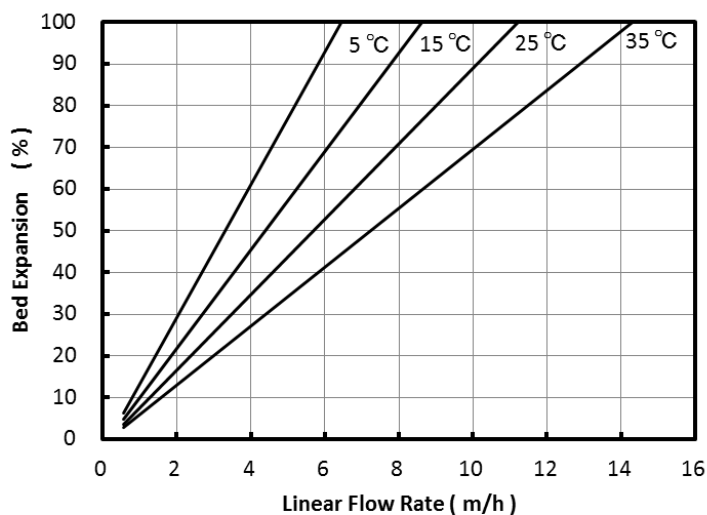


Fig. 2 Bed Expansion of SAF10DL

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



LENNTECH

info@lenntech.com Tel.+31-152-610-900

www.lenntech.com Fax.+31-152-616-289