

Product Data Sheet

DIAION™ SANUPB

DIAION™ SANUPB is a gel type strongly basic anion exchange resin. It has a standard cross-linkages and excellent properties. It is recommended for higher purity water treatment application.

Product

Grade Name	DIAION™ SANUPB
Type	Strong Base Anion
Matrix	Styrene-DVB, Gel
Functional Group	Type I (trimethyl ammonium groups)
Ionic Form	OH ⁻

Specification

Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	0.9 min.
Water Content	%	55 - 65
Particle Size Distribution on 1180 μm	%	2 max.
Particle Size Distribution thr. 300 μm	%	1 max.
Effective Size	mm	0.40 min.
Uniformity Coefficient	-	1.6 max.
Ionic Conversion (OH ⁻)	eq%	90 min.
Ionic Conversion (CO ₃ ²⁻)	eq%	10 max.
Ionic Conversion (Cl ⁻)	eq%	1 max.

Typical Properties

Shipping Density	g/L	660
Mean Particle Size	μm	720
Particle Density	g/mL	1.07
Total Swelling (Cl ⁻ to OH ⁻)	%	23



Product Data Sheet

DIAION™ SANUPB**Recommended Operating Conditions**

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ SANUPB resin in normal down flow operation is shown in the graphs below.

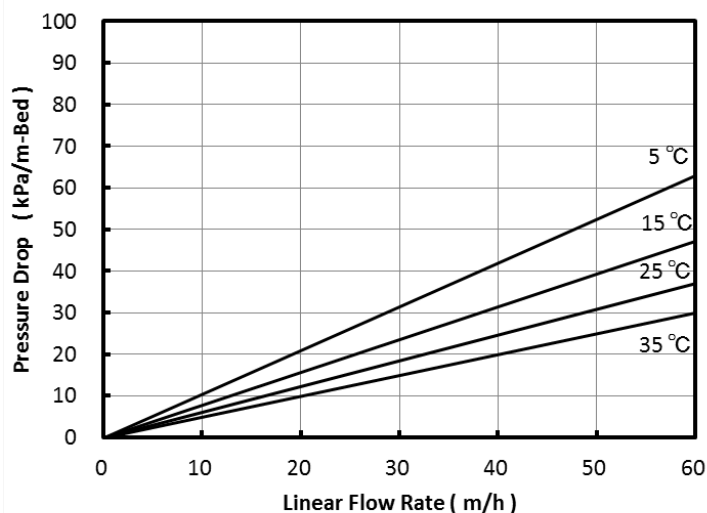


Fig. 1 Pressure Drop of SANUPB

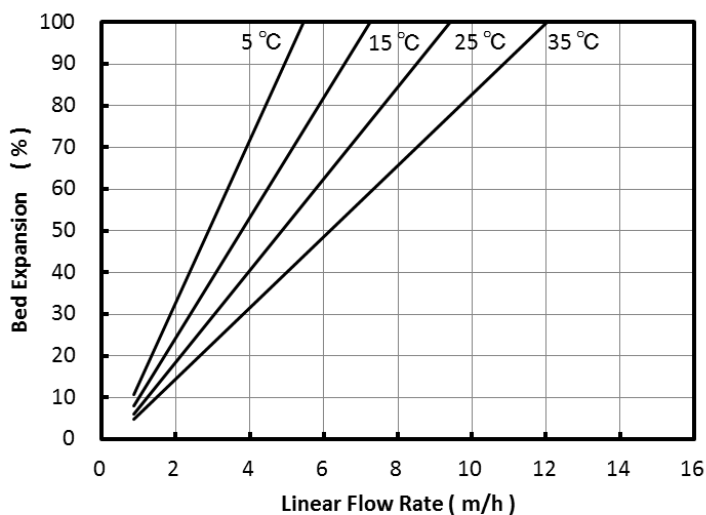


Fig. 2 Bed Expansion of SANUPB

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



LENNTECH

info@lenntech.com Tel.+31-152-610-900

www.lenntech.com Fax.+31-152-616-289