

Product Data Sheet

DIAION™ SK1BLH

DIAION™ SK1BLH is a gel type strongly acidic cation exchange resin. It has standard cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

Product

Grade Name	DIAION™ SK1BLH
Type	Strong Acid Cation
Matrix	Styrene-DVB, Gel
Functional Group	Sulfonic acid
Ionic Form	H ⁺

Specification

Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	1.7 min.
Water Content	%	50 - 60
Particle Size Distribution on 1180 µm	%	5 max.
Particle Size Distribution thr. 425 µm	%	1 max.
Effective Size	mm	0.45 min.
Uniformity Coefficient	-	1.6 max.
Ionic Conversion (H ⁺)	eq%	95 min.

Typical Properties

Shipping Density	g/L	790
Mean Particle Size	µm	710
Particle Density	g/mL	1.20
Total Swelling (Na ⁺ to H ⁺)	%	9

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		HCl
		H ₂ SO ₄
Regenerant Concentration	%	HCl 4 - 10
		H ₂ SO ₄ 1 - 4
Regenerant Level	g/L	30 - 150
Regenerant Flow Rate	m/h	2 - 10
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ SK1BLH resin in normal down flow operation is shown in the graphs below.

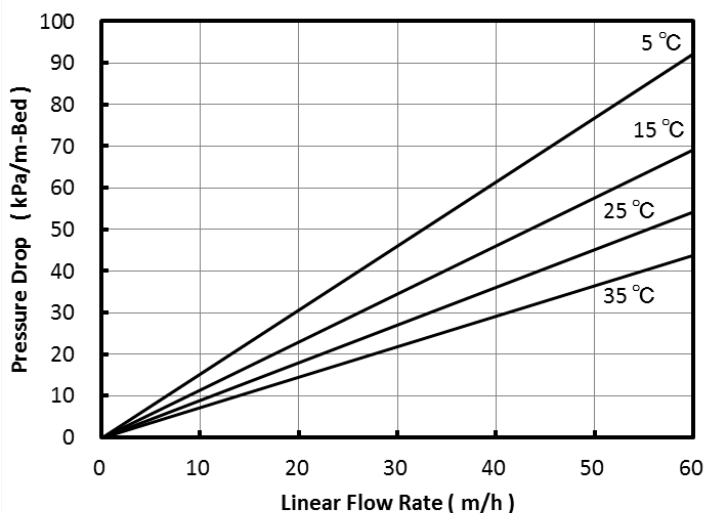


Fig. 1 Pressure Drop of SK1BLH

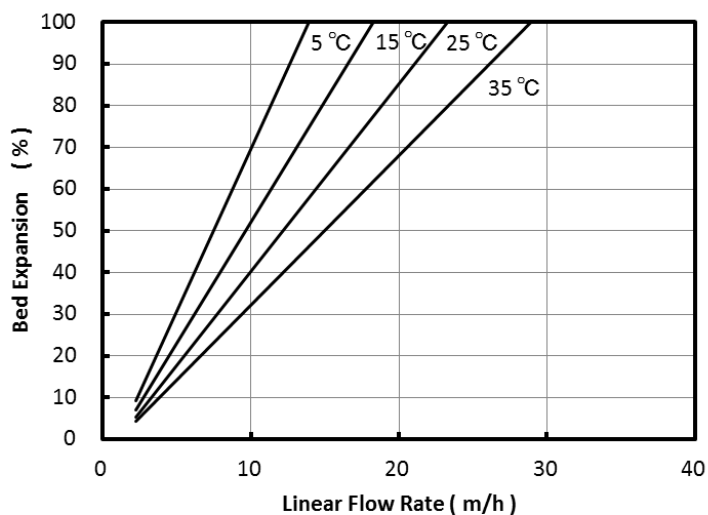


Fig. 2 Bed Expansion of SK1BLH

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.