

Product Data Sheet

DIAION™ WA30C

DIAION™ WA30C is a highly porous type weakly basic anion exchange resin. It has tertiary amine functionality and low-leachable properties compared with DIAION™ WA30. A wide range of applications, especially in a field of higher purity water treatment application, is recommended.

Product

Grade Name	DIAION™ WA30C
Type	Weak Base Anion
Matrix	Styrene-DVB, Highly Porous
Functional Group	Tertiary Amine
Ionic Form	Free Base

Specification

Whole Bead Count	-	95 min.
Total Exchange Capacity	meq/mL	1.5 min.
Water Content	%	43 - 55
Particle Size Distribution on 1180 µm	%	5 max.
Particle Size Distribution thr. 300 µm	%	1 max.
Effective Size	mm	0.40 min.
Uniformity Coefficient	-	1.6 max.
COD	ppm	5 max.

Typical Properties

Shipping Density	g/L	650
Mean Particle Size	µm	700
Particle Density	g/mL	1.05
Total Swelling (FB to Cl ⁻)	%	23

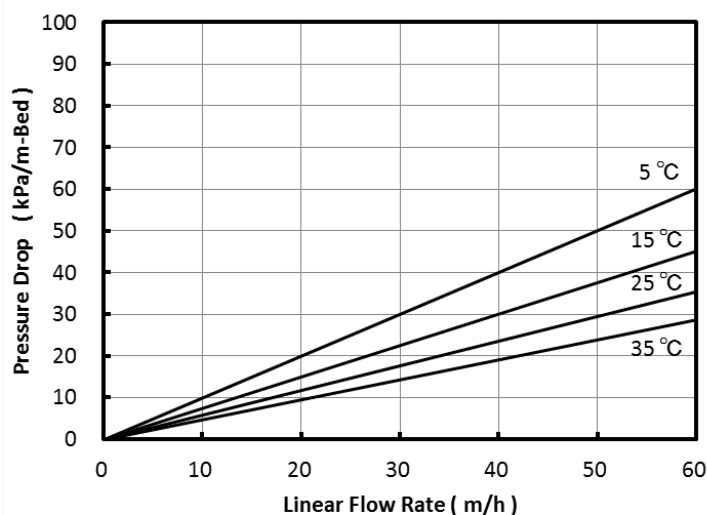
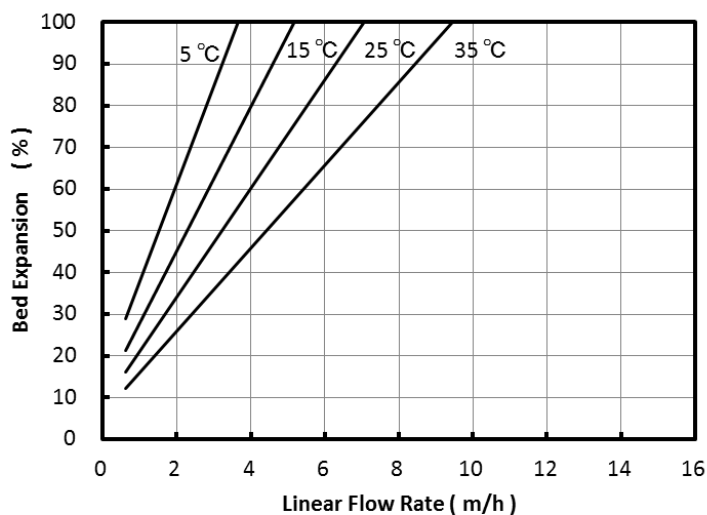
Recommended Operating Conditions

Maximum Operating Temperature	°C	100
Operating pH Range		0 - 9
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		NaOH
Regenerant Concentration	%	NaOH 1 - 4
Regenerant Level	% of ionic load	120
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	5 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WA30C resin in normal down flow operation is shown in the graphs below.

**Fig. 1 Pressure Drop of WA30C****Fig. 2 Bed Expansion of WA30C**

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.