


SAT-1 Signal Alarm Tower Data Sheet

The SAT-1 is a tower light stack with an audible alarm that may be used to indicate various states of operation when connected to OS-4, OS-6, C-30ZX, EE-2, OEM-1, OEM-2, and UV-100. The indicator lights and audible alarm are controlled by relay contact closure.

The SAT-1 has interchangeable stacking light modules that may be customized after purchase.

The SAT-1 can be mounted on new OS-6 in our factory or ordered separately and installed by the user. Hardware is included for direct mount only.

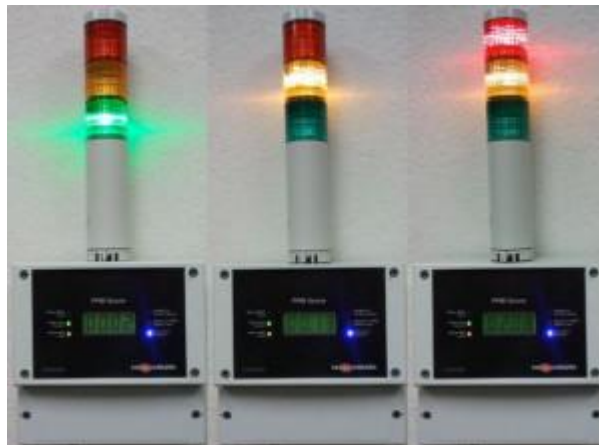

Specifications

- Indicator Lights: Green, Amber, Red; High 360° visibility
- Audible Alarm: None, Slow Pulse, Fast Pulse; 85 dB at 1 m
- Voltage: 24V DC
- Current Consumption
 - Lights: Green: 22 mA, Amber: 28 mA, Red: 28 mA
 - Buzzer: 40 mA
 - Power Supply: 350 mA
- Mounting Location: Indoor use only
- Size: 40 mm X 228 mm (1.57" X 8.97")