



DUO-FINE® GT Series Filter Cartridges

High Performance Pleated Filter Cartridges Improve Lubrication System Performance

- Protects Critical Components From Abnormal Wear by Removing Harmful Contaminants
- Extends Lubricant Life Cycles and Lowers Regular Maintenance Costs
- High Surface Area Provides Significantly Higher Contaminant Holding Capacity than Wound or Sock Type Filter Cartridges
- Rigid Pleat Structure Withstands High Differential Pressures During System Start-Up
- Available in Standard Lengths to Retrofit Most Competitive Housings

Performance Specifications

Filter Grade:

3 micron μm (nominally rated)

Recommended Change Out Differential Pressure¹:

35 psid (2.4 bard)

Maximum Differential Pressure:

100 psid (6.9 bard) @ 68°F (20°C)

50 psid (3.4 bard) @ 150°F (65°C)

Product Specifications

Materials of Construction:

Filter Media:	Borosilicate Microfiberglass with Acrylic Binder
Support Material:	Polypropylene
Hardware:	Polypropylene
Gaskets/O-rings:	Buna N (standard), Viton ² A, Silicone Elastomer, Nordel

Dimensions (nominal):

Outside Diameter: 2 $\frac{3}{8}$ " (6.6 cm)

Inside Diameter: 1 $\frac{3}{32}$ " (2.78 cm)


Lengths: 10" (25.4 cm), 20" (50.8 cm),
27" (68.6 cm), 30" (76.2 cm),
36" (91.4 cm), 40" (102 cm)




¹ - Provided that the maximum differential pressure is not exceeded based on temperature limits defined above.

² - Registered trademark of DuPont Dow Elastomers.

Micrograph of DFGT Filter Media

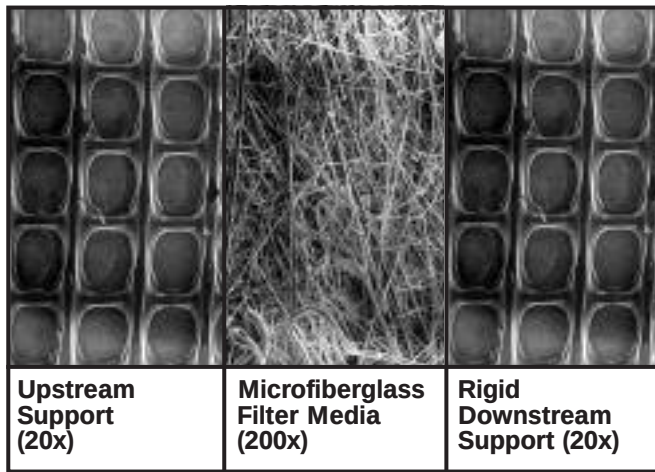

Typical Flow vs. Differential Pressure for Application Sizing

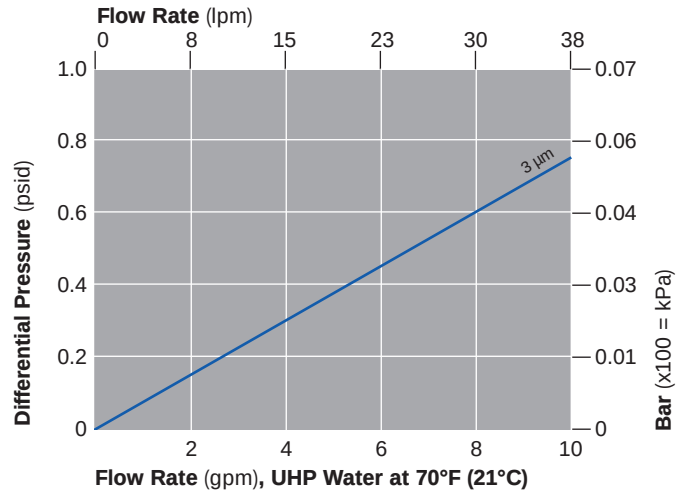

Flow rate is per 10" (25.4 cm) cartridge. For liquids other than water, multiply differential pressure by fluid viscosity (cP).

Part Numbers/Ordering Information

DFGT ■ – ● U ◆ – ▼ (e.g., DFGT 3 – 10UN – DOE)

Code	Filter Grades
3	3 µm

Code	Cartridge Lengths (nominal)
10	10"
20	20"
27	27"
30	30"
36	36"
40	40"

Code	Gasket/O-ring Materials
S	Silicone
N	Buna N (standard)
E	Nordel
V	Viton A

³ - For details, contact Pall Corporation.

Code	End Configurations
DOE	DOE with elastomer gasket seals & end caps
M3	SOE flat closed end, external 222 O-rings (retrofits other manufacturers' Code 0) ³

LENNTECH

info@lennotech.com

www.lennotech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

Pall Corporation has offices and plants throughout the world in locations including: Argentina, Australia, Austria, Belgium, Brazil, Canada, China, France, Germany, India, Indonesia, Ireland, Italy, Japan, Korea, Malaysia, Mexico, the Netherlands, New Zealand, Norway, Poland, Puerto Rico, Russia, Singapore, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, United Kingdom, United States, and Venezuela. Distributors are located in all major industrial areas of the world.