



The PLEATFLOW range of filter cartridges offer the ideal solution for pre and final filtration of a wide variety of process liquids and gases, giving long service life at minimal cost. PLEATFLOW filter's offer an absolute rated, cost effective, high surface area pleated process filters.


PLEATFLOW is manufactured utilising graded density media, and is available in a variety of materials, making the filter suitable for use in a wide range of process applications.

The 100% polypropylene hardware construction of the filter cartridges ensures minimum extractable levels with a range of Industrial solvents and gases, and guaranteed integrity when used in physically demanding applications.

Features and Benefits

- Absolute rating from 1.0 to 75 microns
- Available in 4" to 40" formats
- Endcaps available to retrofit all standard industry housings
- Minimum extractables with Industrial solvents and gases

Performance Characteristics

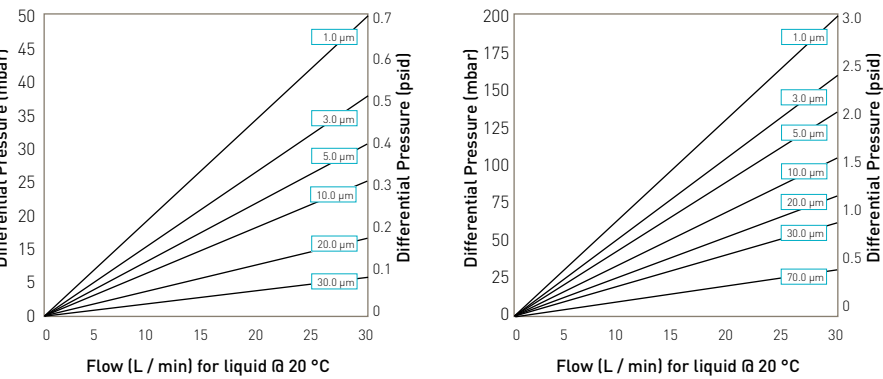

Pressure Loss/Flow for PLEATFLOW GF

Pressure Loss/Flow for PLEATFLOW PP

10" Size (250 mm) Cartridge

10" Size (250 mm) Cartridge

PLEATFLOW Filter Cartridges

- liquid filters
- polyester, glass fibre, polypropylene, cellulose



PLEATFLOW Filter Cartridges

Specifications

Materials of Construction

- Filtration Media: Polyester
Glass Fibre / Polyester
Cellulose
Polypropylene / Polyester
Polypropylene
- Inner Support Core: Polypropylene / Stainless Steel
- Outer Protection Cage:
Rigid outer: Polypropylene
Net: Polyethelene
- Endcaps: Polypropylene / Nylon
- Standard o-rings / Gaskets: Nitrile
EPDM
Silicone
Viton
Polyethylene

Recommended Operating Conditions

Maximum Temperature: 65°C (149°F)
Maximum Differential Pressure: 4 barg (58 psid)
Recommended Changeout Pressure: 2.5 barg (36 psid)

Micron Rating	Liquid Service	
	90% Efficiency (micron)	Absolute Efficiency (micron)
1	0.25	1.0
2	0.5	2.0
3	0.75	3.0
5	1.0	5.0
10	3.0	10.0
20	10.0	20.0
35	15.0	35.0
50	25.0	50.0

Effective Filtration Area

Polypropylene up to 0.55 m² (5.9 ft²) per 250 mm (10" module)

Glass Fibre up to 0.48 m² (5.2 ft²) per 250 mm (10" module)

NOTE: PLEATFLOW GF and PP cartridges can be manufactured to meet the requirements of the food processing industry and are designed to operate at a maximum working temperature of 65°C (149°F) and maximum differential pressure of 4 barg. If applications require temperatures and pressures beyond these limits Parker domnick hunter can fit elements with stainless steel cores and end caps.

Applications

- Re-circulating liquids
- Reagent grade chemicals
- Make-up and wash waters
- Membrane prefiltration
- Oils and acids
- Alkalies
- Solvents
- Catalyst recovery

Ordering Information

G

Code Length (Nominal)	Code Micron	Code Media	Code Core / Endcap	Code Outer Cage	Code End Fitting	Code Seal Material
04 4" (100 mm) 05 5" (125 mm) 06 6" (160 mm) 09 9.75" (247 mm) 10 9.875" (251 mm) 11 10" (254 mm) 19 19.75" (500 mm) 20 20" (508 mm) 29 29.50" (750 mm) 30 30" (762 mm) 39 39.25" (1000 mm) 40 40" (1016 mm)	01 1* µm 02 2* µm 03 3* µm 05 5 µm 10 10 µm 20 20 µm 25 25 µm 30 30 µm 35 35 µm 50 50 µm 75 75** µm 99 100*** µm	01 Polyester 02 Glass Fibre / Polyester 03 Cellulose 04 Polypropylene / Polyester T5 Polypropylene	1 Zintec 2 Polypropylene 3 S.S. / Nylon 4* All Stainless Steel 5 Stainless Steel 8 Polypropylene Glass Poly / Poly	1 Black net 2 Blue net 3 Green net 4 Natural net 5 Red net 6 Orange net 7 Rigid net (standard) 8 Heavy duty 9 Rigid outer (d60) RN221 0 No outer cage Z Zintec S Stainless Steel	0 Double open end 2 Flat / 226 3 Flat / 222 6 Flat / 118 / 020 7 Fin / 226 8 Fin / 222 S Single open end T Flat (no recess) +222	E EPDM N Nitrile S Silicone V Viton**** O No gasket

* DOE only

* Not cellulose
** Polypropylene only
*** Polyester only

Cartridge lengths are measured over end cap shoulders. For DOE type cartridge lengths are measured over gaskets. Standard elements have diameter 2.7" (68mm)
In nominal lengths of 10, 20, 30, 40 inches (250, 500, 750, 1000mm)
Other dimensions available on request.

LENNTECH bv
info@lenntech.com
www.lenntech.com
Tel. +31-15-261.09.00
Fax. +31-15-261.62.89

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

****Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc