

INDUSTRIAL C-246 SERIES

MODIFIED MOLDED BLOCK CARTRIDGES



C-246 Series Filter Cartridges offer the effective chlorine taste & odor reduction found in traditional carbon block media while providing superior sediment reduction with resistance to premature plugging.

C-246 Series Cartridges are modified molded blocks manufactured using proprietary Fibredyne technology. This technology creates a unique filter media by attaching powdered activated carbon onto a cellulose-free synthetic fiber matrix. Benefits of this technology include low pressure drop over the entire life of the cartridge and up to three times the chlorine taste & odor and dirt-holding capacity of traditional 0.5 micron carbon blocks.

FEATURES/BENEFITS

High chlorine taste & odor and bad taste & odor reduction

Some organic chemical reduction

Reduces cysts such as Cryptosporidium and Giardia by mechanical means*

Premium dirt-holding capacity

Combines benefits of both a sediment filter and a carbon block into a single cartridge

Made with Fibredyne technology

Post-filtration layer fused to the carbon/fiber media blend ensures cartridge will not release fines into the effluent stream

Manufactured entirely from FDA-compliant materials

Reduces particles as small as 0.5 microns in size by mechanical means

*Based on manufacturer's internal testing
EPA EST. NO. 086074-NH-001

APPLICATIONS

Commercial

Food Service

Industrial

Residential Water



COMPONENT

Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

CARTRIDGE SPECIFICATIONS

MODEL	MAX. DIMENSIONS	μ (NOMINAL)	INITIAL PSI @ FLOW RATE	CHLORINE TASTE & ODOR REDUCTION @ FLOW RATE*	CASE QUANTITY
C-246X10T	2.63" x 9.75" (67mm x 248mm)	0.5	10.7 psi @ 1.0 gpm (0.7 bar @ 3.8 Lpm)	>20,000 gallons @ 1 gpm (>95,700 L @ 3.8 Lpm)	30
C-246X20T	2.63" x 20" (67mm x 508mm)	0.5	10.7 psi @ 2.0 gpm (0.7 bar @ 7.6 Lpm)	>40,000 gallons @ 2 gpm (>151,400 L @ 7.6 Lpm)	30
C-246X30T	2.63" x 30" (67mm x 762mm)	0.5	10.7 psi @ 3.0 gpm (0.7 bar @ 11.4 Lpm)	>60,000 gallons @ 3 gpm (>287,100 L @ 11.4 Lpm)	12
C-246X40T	2.63" x 40" (67mm x 1,016mm)	0.5	10.7 psi @ 4.0 gpm (0.7 bar @ 15.2 Lpm)	>80,000 gallons @ 4 gpm (>382,800 L @ 15.1 Lpm)	12

*Based on manufacturer's internal testing


Custom configurations available. Please contact customer service.

Filter Media	Bonded PAC
Endcaps	Polypropylene
Netting	Spun Polyethylene
Gaskets	Santoprene
Temp. rating	40° -180° F (4.4° -82.2°C)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Performance capacity depends on system design, flow rate and certain other application conditions. Certain states require system registration and certification for health-related contaminant reduction using the water. Cartridges will contain a very small amount of carbon fines (very fine black powder). After installation, a new cartridge should be flushed with sufficient water to remove all traces of fines prior to using the water. Micron ratings based on 85% or greater removal of given particle size. Estimated capacity using 2 ppm free available chlorine at 0.5 ppm breakthrough. Giardia, Cryptosporidium, Entamoeba and Toxoplasma cyst claim based on tests showing greater than 99.95% reduction using NSF Standard 53 protocol.

PRESSURE DROP VS FLOW RATE

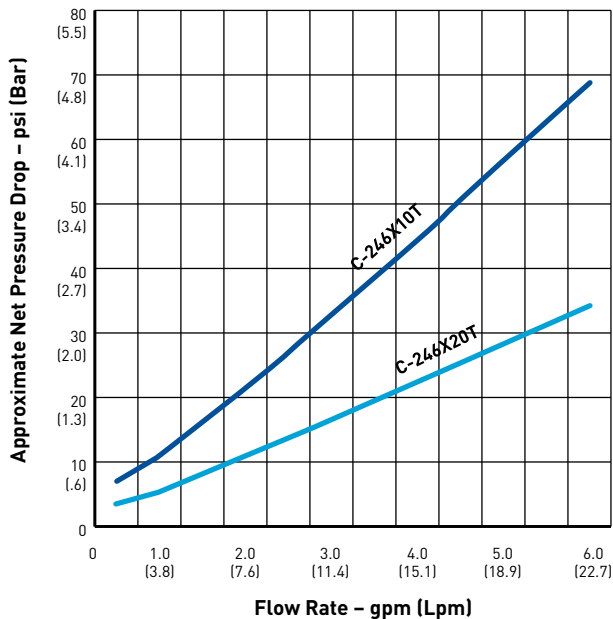

FILTRATION & PROCESS

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4002999 Rev D NV14 © 2014 Pentair Residential Filtration, LLC. All rights reserved.