

INDUSTRIAL PLEATED SERIES FILTER BAGS



Pleated Series Filter Bags are available for all industry-standard housings in a wide array of micron ratings. These bags are constructed with polypropylene or polyester felt and provide more than four times the surface area of standard filter bags.


FEATURES/BENEFITS

High dirt-loading capacity	Fully supported pleats
Greater surface area	Positive sealing flange designs
Complete ultrasonic construction	Available medias range from 1-200 microns
Low pressure drop	

APPLICATIONS

Commercial process fluids
Industrial process fluids

PRESSURE DROP VS FLOW RATE

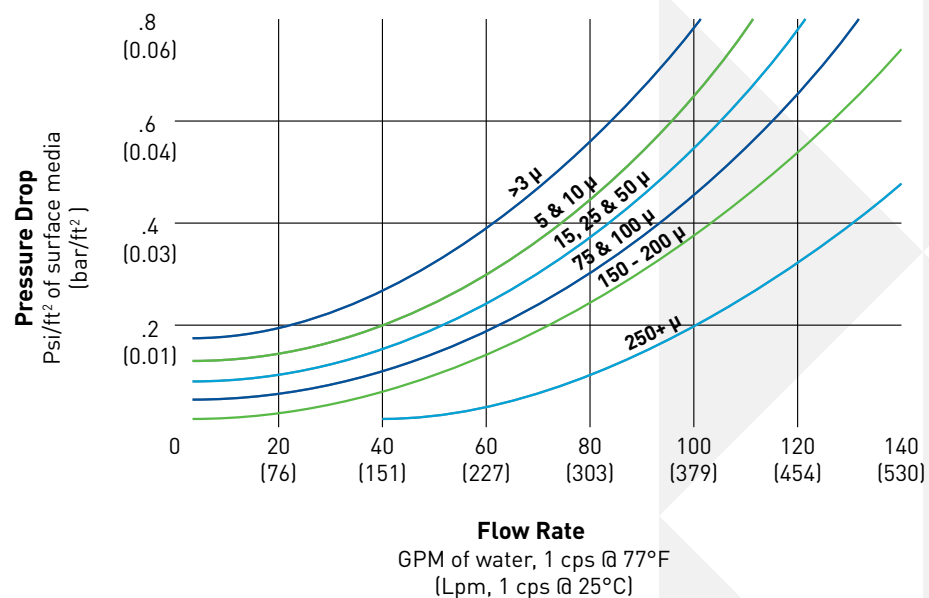

BAG SPECIFICATIONS

Filter Media Polyester or Polypropylene

Liquid Bag Media


SIZE	PLEATED		STANDARD	
	FT ²	M ²	FT ²	M ²
#1	9.0	0.83	2.0	0.19
#2	19.0	1.77	4.4	0.41
#4	2.5	0.23	1.0	0.09
#8	8.0	0.74	2.0	0.19
#9	13.0	1.12	3.4	0.32

ORDERING INFORMATION

To create your ordering part number, use the part number configurator below.
Custom configurations available. Please contact customer service.

EXAMPLE: KE1PLK2

Polyester Felt Filter Bag (KE)
1-micron rating (1), Pleated (PL), Outer Cage (K), Standard #2 size (2)

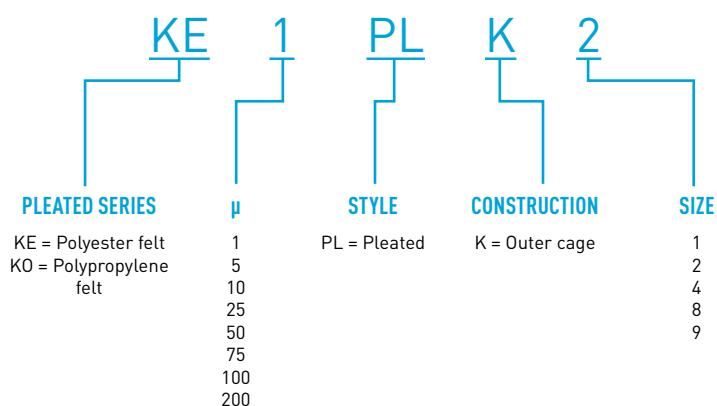

Note: case quantity 4



FILTRATION & PROCESS

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289