




- Energy saving thanks to higher hydraulic performances
- Multistage hydraulic system
- Stainless steel pump body and tank
- Dry running protection
- Protection against motor overload and water temperature overheating

Model: **EVO-MULTIPRESS
340 SX LOGIC SAFE**
Part number: **N5301240**
Barcode: **7630014570027**

Self priming multistage boosterset, with integrated electronic device LOGIC SAFE for dry running protection and protection against motor overload and water temperature overheating.

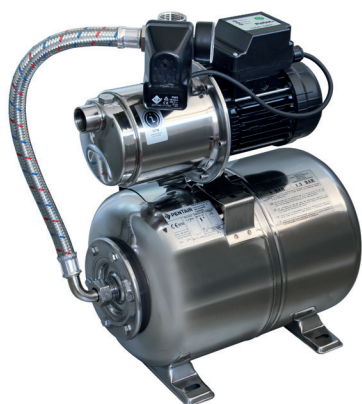

APPLICATIONS

House pressurization

Automatic irrigation



x 4

LENNTECH
WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

ABSORBED POWER	800 W	MAX.ADVISED SUCTION HEAD	8 m
VOLTAGE	230 V	TANK CAPACITY	24 L
FLOW RATE	5000 l/h	PROTECTION CLASS	IP55
MAX. HEAD	45 m	POWER CABLE	1.5 m H05 RNF
RATED CURRENT	3.7 A	SUCTION/DELIVERY PORT	33.25 mm (1")
PUMP BODY	Stainless Steel	WEIGHT:	14 Kg
N° IMPELLERS	4	PACKAGING DIMENSIONS	49 x 28.8 x 58 cm
TANK	Stainless Steel	PCS PER PALLET:	18