

X-FLOW R-100

MICROFILTRATION MEMBRANE

MEMBRANE ELEMENT DATASHEET

6" R-100 MODULE RVS & R-100 INSERT RVS

ARTICLE CODE MODULE HOUSING AND INSERT: 1.5 MF, 1832BB422A - 3.0 MF, 1832BB622A

GENERAL INFORMATION

R-100 is a stainless steel module used for the filtration and/or clarification of aqueous solutions and beverages such as wine, juice or cider.

Mode of operation is feed and bleed in crossflow mode with regular backwash.

CONNECTION SPECIFICATIONS

- Feed side, Flange: DIN 2633, 150NW
- Permeate side, Coupling: DIN 11851, 65 NW

MATERIALS OF CONSTRUCTION


Housing	Stainless steel AISI 316/316L
Potting	Epoxy, food grade
O-ring	Viton or EPDM
Membrane	PES/PVP

INSERT SPECIFICATIONS

Hydraulic Membrane Diameter [mm]	Membrane area [m ²]	Insert length L ₀ [mm]	Insert outer diameter D ₀ [mm]
1.5	9.3	1022	160.6
3.0	5.0	1022	160.6

MODULE SPECIFICATIONS

Module length L₀: 1040 mm
 Permeate port protrusion ^l₁: 112 mm
 Permeate port lateral recess ^l₀: 125 mm
 Feed connector, DIN 2633 B: 150 NW
 Thread, male, DIN11851 A: 65 * 1/6"

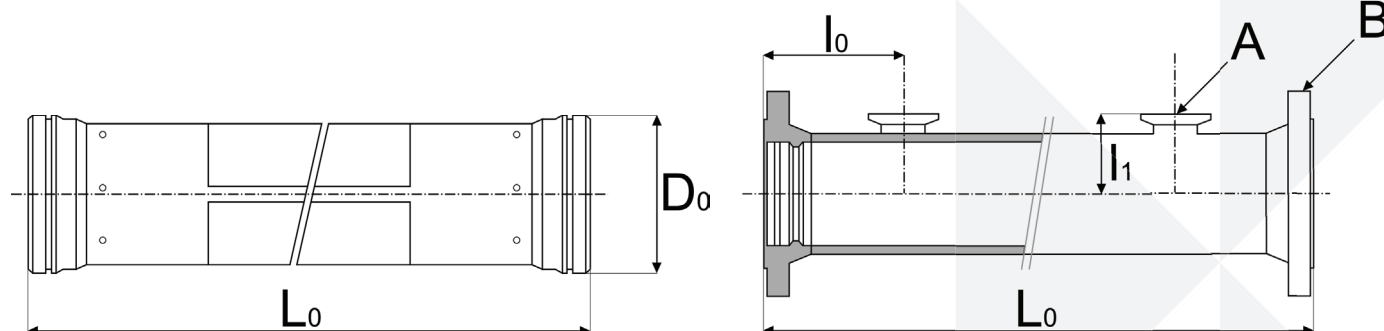

Membrane element contains:

Housing	1x	15005
O-ring	2	17029
Shut ring	2x	18013
Quad ring	2x	17023

X-FLOW R-100

MICROFILTRATION MEMBRANE

MEMBRANE ELEMENT DATASHEET

OPERATING SPECIFICATIONS

Max. system pressure	Max. trans-membrane pressure	Max. backflush pressure	Max. temp.
[kPa]	[kPa]	[kPa]	[°C]
at 20 °C 1000	at 0-50 °C 300	at 0-30 °C 200	65
at 65 °C 600	at 50-65 °C 200	at 30-40 °C 150	
		at 40-65 °C 100	

PROCESS CHARACTERISTICS*

Membrane Diameter	Crossflow flow rate (*)	Pressure-drop across module at 1 m/s	Pressure-drop across module at 2 m/s
[mm]	[m³/h]	[kPa]	[kPa]
1.5	13.7 x v	14	56
3.0	14.8 x v	7	24

* Water, 20 °C

Superficial velocity (v) in m/s

- Final maximum operating limits are determined by the lowest values of the membrane and element pressure and temperature specifications
- Backwash water should be free of particulates and should be of permeate quality or better
- Backwash pumps should preferably be made of non-corroding materials, e.g. plastic or stainless steel. If compressed air is used to pressurize the backwash water, do not allow a two-phase air/water mixture to enter the element
- To avoid mechanical damage, do not subject the membrane module or element to sudden temperature changes, particularly decreasing. Do not exceed 65 °C process temperature. Bring the module or element back to ambient operating temperature slowly (typical value 2-3 °C/min). Failure to adhere to this guideline can result in irreparable damage

STORAGE

New membrane modules can be stored as supplied.

Membrane modules should be stored in a dry, normally ventilated place, away from sources of heat, ignition and direct sunlight. Store between 0 and 40 °C at a relative humidity between 20 and 80 %.

The membrane modules should not be subjected to any freezing temperatures.

After use, MF membranes can be dried. After drying the membrane can be spontaneously re-wetted without the use of any wetting agents.

To avoid biological growth during shutdowns or storage, wet membranes should be treated with a compatible biocide. The membrane is compatible with many common disinfecting agents or biocidal preservatives.

For short-term shutdowns, a daily flush with permeate quality water containing up to 2.0 ppm free available chlorine for 30 to 60 minutes may be adequate for bacteria control.

In case of long-term storage, membranes should be cleaned before the disinfection step is carried out. For disinfection, a 1% sodium metabisulfite solution can be used.



LENNTECH
WATER TREATMENT SOLUTIONS

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

Note: The information and data contained in this document are based on our general experience and are believed to be correct. They are given in good faith and are intended to provide a guideline for the selection and use of our products. Since the conditions under which our products may be used are beyond our control, this information does not imply any guarantee of final product performance and we cannot accept any liability with respect to the use of our products. The quality of our products is guaranteed under our conditions of sale. Existing industrial property rights must be observed. Replaces: CAPF-15-R100-RVS-0950

DS R-100 MF EN 4914 © 2014 Pentair. All Rights Reserved.

