



### Threaded Adapters – 2.5"- 8 NPSM




| Part No. | Reduced to | Material | Max. Temp. | Max. Pressure |
|----------|------------|----------|------------|---------------|
| 2751-3   | 0.75" NPT  | PVC      | 120° F     | 150 PSI       |
| 2751-5   | 1" NPT     | PVC      | 120° F     | 150 PSI       |
| 2751-8   | 1.25" NPT  | PVC      | 120° F     | 150 PSI       |
| 2751-4   | 1.5" NPT   | PVC      | 120° F     | 150 PSI       |
| 2751-6   | 2.25"- 16  | PVC      | 120° F     | 150 PSI       |

### Threaded Adapters – 4"- 8 UN




| Part No. | Reduced to    | Material | Max. Temp. | Max. Pressure |
|----------|---------------|----------|------------|---------------|
| 4821-6   | 1" NPT        | CPVC     | 150° F     | 150 PSI       |
| 4821-12  | 1.25" NPT     | CPVC     | 150° F     | 150 PSI       |
| 4821-7   | 1.5" NPT      | CPVC     | 150° F     | 150 PSI       |
| 4821-8   | 2" NPT        | CPVC     | 150° F     | 150 PSI       |
| 4821-17  | 2"- 11.5 NPSM | CPVC     | 150° F     | 150 PSI       |
| 4821-2   | 2.5"- 8 NPSM  | CPVC     | 150° F     | 150 PSI       |
| 4821-4   | 3"- 8 UN      | CPVC     | 150° F     | 150 PSI       |
| 4821-11  | 2.375" Bored  | CPVC     | 150° F     | 150 PSI       |

### Threaded Adapters – 6"- 8 UN



| Part No. | Reduced to | Material | Max. Temp. | Max. Pressure |
|----------|------------|----------|------------|---------------|
| 4125-003 | 3" FPT     | NORYL    | 150° F     | 150 PSI       |

### Threaded Closures




| Part No. | Opening      | Material | Max. Temp. | Max. Pressure |
|----------|--------------|----------|------------|---------------|
| 2751-1   | 2.5"- 8 NPSM | PVC      | 120° F     | 150 PSI       |
| 4821-1   | 4"- 8 UN     | CPVC     | 150° F     | 150 PSI       |
| 2695-1   | 6"- 8 UN     | CPVC     | 150° F     | 150 PSI       |

# Accessories


## Brass Side Adapters

| Part No. | Reduced to              | Max. Temp. | Max. Pressure |
|----------|-------------------------|------------|---------------|
| 1661     | 0.75" NPT to 0.75" FNPT | 150° F     | 150 PSI       |
| 2829     | 1.5" NPT to 1.5" FNPT   | 150° F     | 150 PSI       |

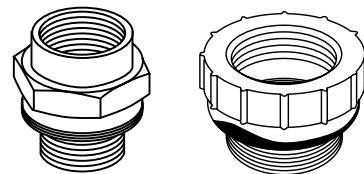


## Vacuum Breakers

| Part No. | Max. Temp. | Max. Pressure | Connection |
|----------|------------|---------------|------------|
| 10725    | 150° F     | 150 PSI       | 1" FNPT    |
| 10724    | 120° F     | 125 PSI       | 1.5" MNPT  |




## Replacement O-rings

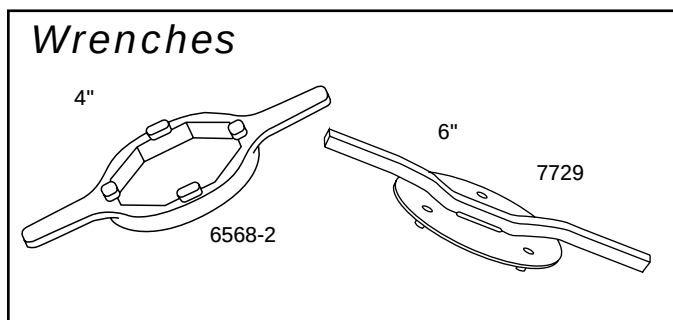

| Opening         | Standard (EPDM) | Chemical (Viton) |
|-----------------|-----------------|------------------|
| 2" Elbow        | 2694-120        | 2694-36          |
| 2.5" Thread     | 2694-112        | 2694-20          |
| 4" Thread       | 2694-114        | 2694-21          |
| 4" ANSI Flange  | 2694-136        | 2694-139         |
| 6" Thread       | 2694-68         | 2694-148         |
| 6" SNA Flange   | 2694-69         | 2694-45          |
| 10" ANSI Flange | 2694-132        | 2694-133         |
| 16" MWY Flange  | 2694-131        | 2694-130         |

## SNA Flanged Adapters

| Part No. | Flange Size | Material | Adapt to           | Drain |
|----------|-------------|----------|--------------------|-------|
| 10659    | 6" SNA      | CPVC     | 1" NPT             | No    |
| 10660    | 6" SNA      | CPVC     | 1.5" NPT           | No    |
| 10661    | 6" SNA      | CPVC     | 2" NPT             | No    |
| 10662    | 6" SNA      | CPVC     | 3" NPT             | No    |
| 10663    | 6" SNA      | CPVC     | 4" NPT             | No    |
| 5292     | 6" SNA      | NORYL    | 3" NPT to 3" NPT   | Yes   |
| 5267     | 6" SNA      | NORYL    | 3" NPT to 3" NPT   | No    |
| 5295     | 6" SNA      | NORYL    | 3" NPT to 4"- 8 UN | No    |
| 10566    | 6" SNA      | NORYL    | 4"- 8 UN           | No    |

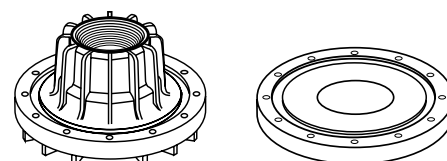


150 PSI / 150° F

Kits come complete with standard o-ring and hardware.

Replacement hardware:  
CPVC – 5310  
Noryl – 4750

## ANSI Flanged Adapters

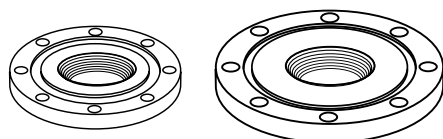


Kits come complete with standard o-ring and hardware.

Replacement hardware:  
4" – 5257      10" – 5754

| Part No. | Flange Size | Material | Adapt to |
|----------|-------------|----------|----------|
| 5276     | 4" ANSI     | CPVC     | 3" NPSM  |
| 10673    | 4" ANSI     | CPVC     | 2" NPT   |
| 10674    | 4" ANSI     | CPVC     | 3" NPT   |
| 11929    | 10" ANSI    | CPVC     | 4" NPT   |
| 11930    | 10" ANSI    | CPVC     | 6" NPT   |


## Closures

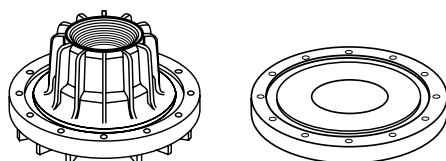

Kits come complete with standard o-ring and hardware.

| Part No. | Flange Size | Material |
|----------|-------------|----------|
| 5296     | 6" SNA      | NORYL    |
| 10658    | 6" SNA      | CPVC     |
| 5259     | 4" ANSI     | CPVC     |
| 10472    | 4" ANSI     | Acrylic  |
| 10139    | 10" ANSI    | CPVC     |

## Manway Closures/Adapters

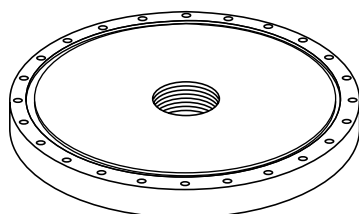

Kits come complete with standard o-ring and hardware.

Replacement hardware: 10107

| Part No. | Opening | Reduced to       | Material   | Max. Temp. | Max. Pressure |
|----------|---------|------------------|------------|------------|---------------|
| 10108    | 16" MWY | 2" NPT           | Vinylester | 150° F     | 150 PSI       |
| 14644    | 16" MWY | 3" NPT to 3" NPT | Vinylester | 150° F     | 150 PSI       |
| 10582    | 16" MWY | 2" NPT           | CPVC       | 150° F     | 100 PSI       |
| 10583    | 16" MWY | 3" NPT           | CPVC       | 150° F     | 100 PSI       |
| 10584    | 16" MWY | 4" NPT           | CPVC       | 150° F     | 100 PSI       |
| 11294    | 16" MWY | 3" NPT to 3" NPT | CPVC       | 150° F     | 100 PSI       |
| 11295    | 16" MWY | 4" NPT to 4" NPT | CPVC       | 150° F     | 100 PSI       |
| 5294     | 16" MWY | 2" NPT           | Stainless  | 150° F     | 150 PSI       |

## Connector Accessories

|                                                                                                           |                                                                                                                                                                         |                         |                 |                                                                                                                        |                 |                                          |                                                                                                                                                |      |                                            |
|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------------|
|                                                                                                           | <b>Flexible Assembly (NPT - NPT)</b><br><table border="1"> <tr> <td>5285</td> <td>2" NPT x 2" NPT</td> </tr> <tr> <td>5286</td> <td>3" NPT x 3" NPT</td> </tr> </table> | 5285                    | 2" NPT x 2" NPT | 5286                                                                                                                   | 3" NPT x 3" NPT |                                          | <b>Flexible Assembly (Flanged)</b><br><table border="1"> <tr> <td>5239</td> <td>4" Flanged to 3" NPT (CPVC) 150 psi/150° F</td> </tr> </table> | 5239 | 4" Flanged to 3" NPT (CPVC) 150 psi/150° F |
| 5285                                                                                                      | 2" NPT x 2" NPT                                                                                                                                                         |                         |                 |                                                                                                                        |                 |                                          |                                                                                                                                                |      |                                            |
| 5286                                                                                                      | 3" NPT x 3" NPT                                                                                                                                                         |                         |                 |                                                                                                                        |                 |                                          |                                                                                                                                                |      |                                            |
| 5239                                                                                                      | 4" Flanged to 3" NPT (CPVC) 150 psi/150° F                                                                                                                              |                         |                 |                                                                                                                        |                 |                                          |                                                                                                                                                |      |                                            |
| <b>Connector</b><br><table border="1"> <tr> <td>5045</td> <td>3" NPSM x 3" NPT (CPVC)</td> </tr> </table> | 5045                                                                                                                                                                    | 3" NPSM x 3" NPT (CPVC) |                 | <b>Elbow</b><br><table border="1"> <tr> <td>5201</td> <td>2" NPSM to 2" Slip (CPVC) 150 psi/150° F</td> </tr> </table> | 5201            | 2" NPSM to 2" Slip (CPVC) 150 psi/150° F |                                                                                                                                                |      |                                            |
| 5045                                                                                                      | 3" NPSM x 3" NPT (CPVC)                                                                                                                                                 |                         |                 |                                                                                                                        |                 |                                          |                                                                                                                                                |      |                                            |
| 5201                                                                                                      | 2" NPSM to 2" Slip (CPVC) 150 psi/150° F                                                                                                                                |                         |                 |                                                                                                                        |                 |                                          |                                                                                                                                                |      |                                            |

Kits come complete with standard o-ring and hardware (if required).