


PRESSURE VESSEL / Stainless Steel

PVS- 4040 - x 600 - SP - VC



- Pressure range: up to 41 bar / 600 psi
- Temperature range: up to 85°C
- for all types of membrane elements
- on request with quality certification
- Material 316L / 1.4404
- including all necessary seals (EPDM) and internal adapters
- on request up to 4 side-port connections possible

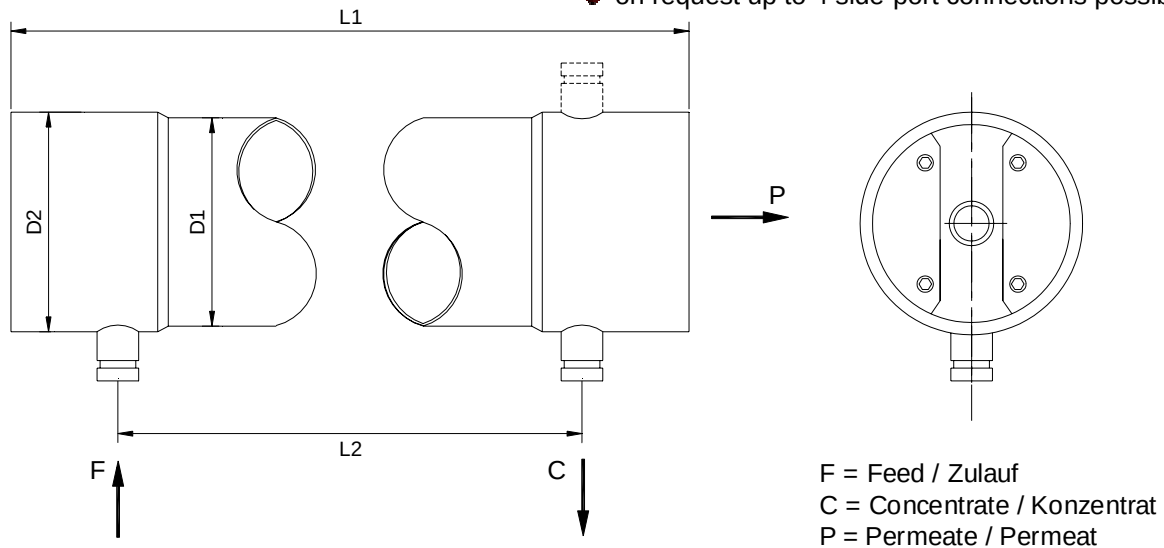

D₁ = 108 mm
D₂ = 116 mm

Art. No.	Type	Elements per PV	Length L1 in mm	Length L2 in mm	Feed connection	Concentrate connection	Permeate connection	Material
433 204	PVS-4040-1-600 - SP- VC	1	1100	995	3/4"- Vict.	3/4"- Vict.	1/2"	316L
433 214	PVS-4040-2-600 - SP- VC	2	2115	2010	3/4"- Vict.	3/4"- Vict.	1/2"	316L
433 224	PVS-4040-3-600 - SP-VC	3	3130	3025	3/4"- Vict.	3/4"- Vict.	1/2"	316L
433 234	PVS-4040-4-600 - SP- VC	4	4150	4045	3/4"- Vict.	3/4"- Vict.	1/2"	316L
433 244	PVS-4040-5-600 - SP- VC	5	5165	5060	3/4"- Vict.	3/4"- Vict.	1/2"	316L
433 254	PVS-4040-6-600 - SP- VC	6	6180	6075	3/4"- Vict.	3/4"- Vict.	1/2"	316L

Pressure Vessel: polished inside, on the outside fine sharpened.
Material: Stainless Steel 316L (1.4571)
Head-Material: 316L (1.4571)
Headfixing: spring washers, stainless steel

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

PVS-4040-600 SP VC 09/05