
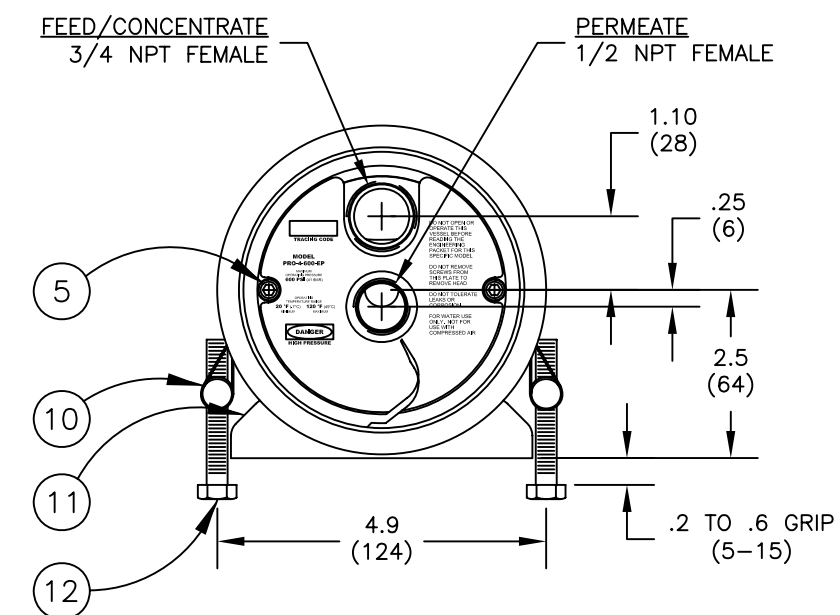


600 PSI
END PORT

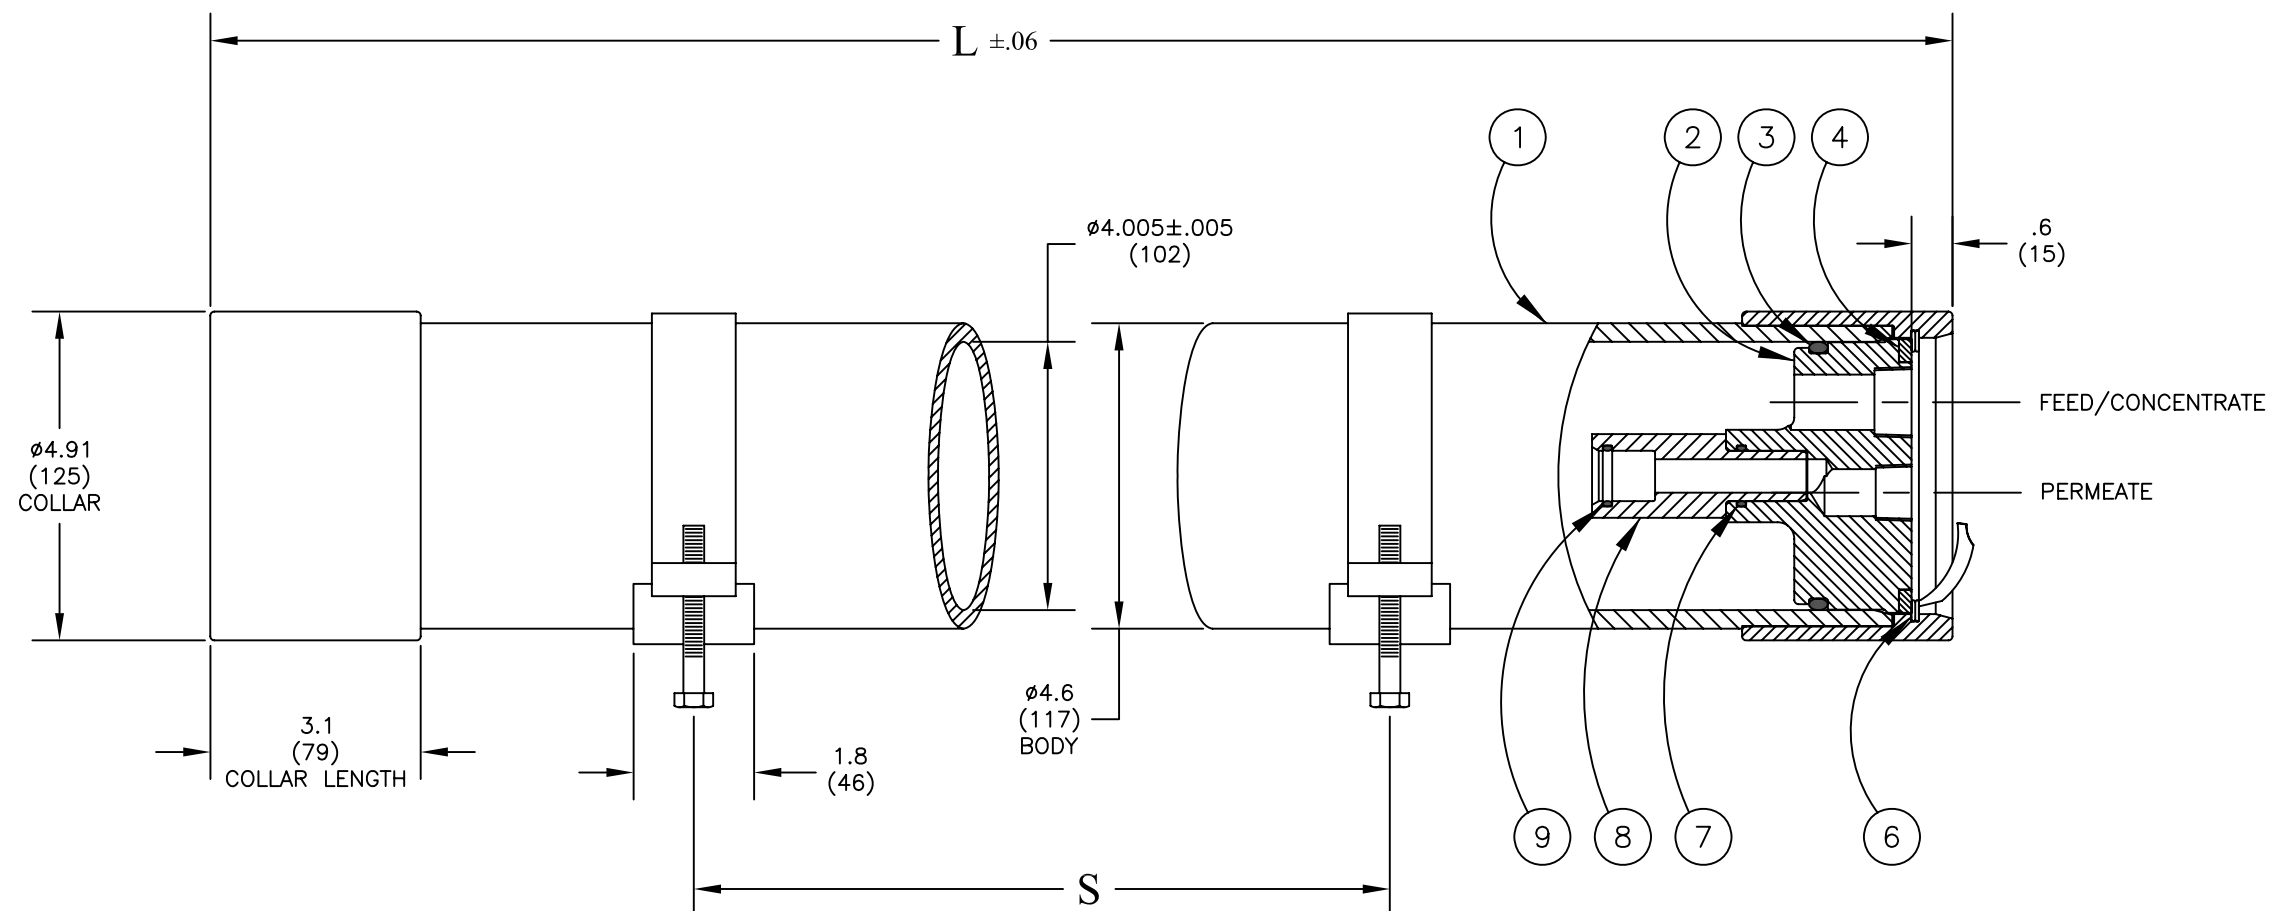

LENNTECH
WATER TREATMENT SOLUTIONS

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

NOTES:
DIMENSIONS IN INCHES (MM APPROX.)

FOR REFERENCE ONLY, NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED

INCORRECT MANIFOLDING WILL CAUSE SEVERE LOCAL STRESS AROUND PORT AND MAY RESULT IN LEAKS AND PREMATURE FAILURE. TAKE EVERY PRECAUTION LISTED IN THIS PACKET.

INTERNAL PERMEATE PRESSURE MUST NOT EXCEED 125 PSI.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



www.protec-arisawa.com

PRO 4-600-EP

ENGR AP 1/27/04				
QLTY WJ 1/27/04				
MRKT DWE 1/27/04	ECO 10119	REVISED 4/28/11	DRAWING 104005	REVISED D

ITEM	QTY	P/N	DESCRIPTION	MATERIAL
1	1	3040007	Shell	Filament Wound, Epoxy FRP
2	2	4040054-1	End Plug	PVC Thermoplastic
3	2	6180342	Head Seal	Ethylene Propylene
4	2	4040060-1	Bearing Ring	Stainless Steel, 300 Series
5	4	6150002	Screw, Bearing Ring	Stainless Steel, 300 Series
6	2	4040079	Retaining Ring w/ Finger Pull	Stainless Steel, 316 Series
7	2	6180116	Adapter Seal	Ethylene Propylene
8	2	A/R	Adapter	PVC Thermoplastic
9	2	A/R	PWT Seal	Ethylene Propylene
10	2	4040040	Strap Assembly	Stainless Steel, 300 Series
11	2	4040037	Support Saddle	Polyurethane
12	4	6150001	Strap Screw	Stainless Steel, 300 Series

Shell Length Code	L inch (mm)	S Span in (mm)	Empty Weight lb (kg)
-1	49.1 (1247)	28 (711)	15 (7)
-2	89.1 (2263)	51 (1295)	25 (11)
-3	129.1 (3279)	73 (1854)	35 (16)
-4	169.1 (4295)	2 @ 64 (1626)	45 (20)
-5	209.1 (5311)	2 @ 78 (1981)	55 (25)
-6	249.1 (6327)	2 @ 92 (2337)	65 (30)