
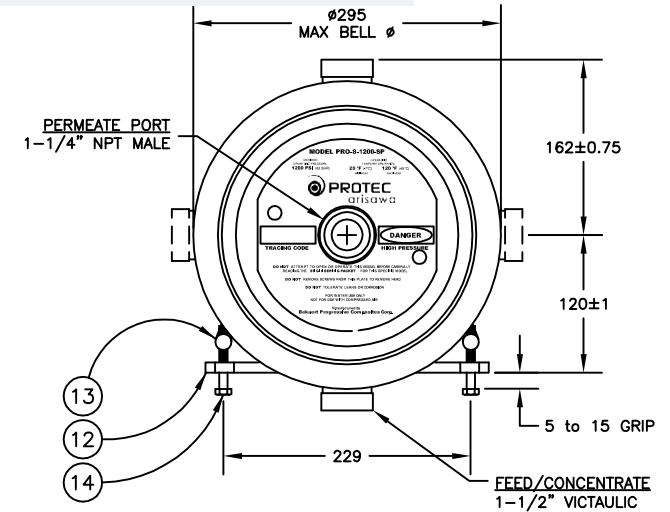


Design Pressure = 1200 PSI @ 120 °F
Min. Design Temperature = 20 °F @ 1200 PSI
Hydrotest Pressure = 1320 PSI

1200 PSI
SIDE PORT

LENNTECH
Water Treatment Solutions

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

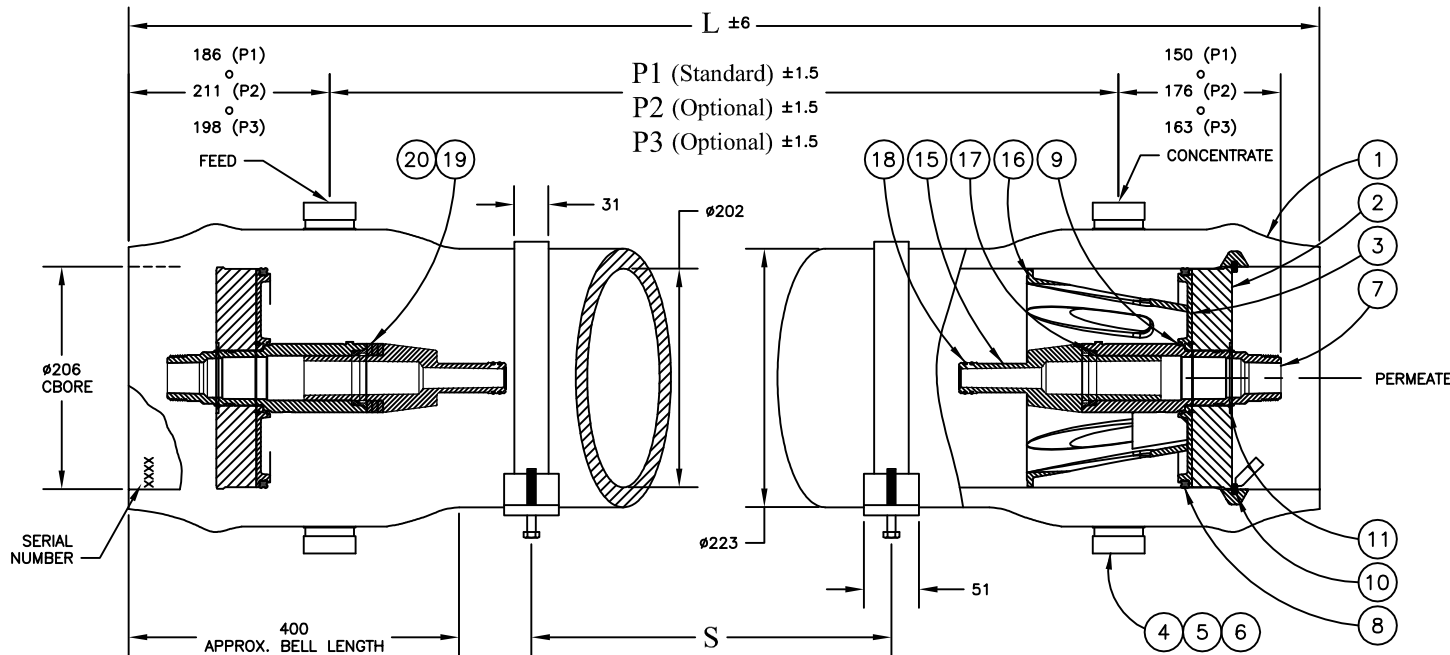

DIMENSIONS IN MM.

FOR REFERENCE ONLY, NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED

CENTER VESSEL ON 2 OR 3 SUPPORTS AT SPAN(S) "S". 3 SUPPORTS REQUIRED FOR LENGTHS -4 AND OVER

INCORRECT MANIFOLDING WILL CAUSE SEVERE LOCAL STRESS AROUND PORT AND MAY RESULT IN LEAKS AND PREMATURE FAILURE. TAKE EVERY PRECAUTION LISTED IN THIS PACKET.

INTERNAL PERMEATE PRESSURE MUST NOT EXCEED 125 PSI.

ASME SECTION X, RP CODE STAMP OPTIONAL

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

PROTEC
arisawa

PRO-8-1200-SP

ENGR
BOA
6/06/16

QLTY
AL
6/06/16

MRKT
GCM
6/06/16

ECO
15082

REVISED
12/06/17

DRAWING
101006

REV
V

ITEM	QTY	P/N	DESCRIPTION	MATERIAL
1	1	4080023	Shell	Filament Wound, Epoxy FRP
2	2	4080723	Bearing Plate	6061-T6 Aluminum, Hard Anodized
3	2	4080177-3	Sealing Plate	Noryl
4	2	4080234	Feed/Concentrate Port - Side Port	St. Steel S32750
5	4	6121187	Retaining Ring, F/C Port	St. Steel, 316L
6	2	6184604N	Seal, F/C Port	Ethylene Propylene
7	2	4080308	Permeate Port	Noryl GFN2
8	2	610442MK	Head Seal	Ethylene Propylene
9	2	6180229N	Permeate Port Seal	Ethylene Propylene
10	2	4080320	Retaining Ring w/ Finger Pull	St. Steel, 316L
11	2	6121200	Retaining Ring, Permeate Port	St. Steel, 316L
12	2*	4080175	Support Saddle	Thermoplastic Rubber
13	2	4080800	Strap Assembly [M8]	Stainless Steel, 316
14	4	6150072	Strap Screw [M8x70mm]	Stainless Steel A4
15	2	5080074	Membrane Adapter	Noryl
16	1	4080165-1	Thrust Cone	PVC Thermoplastic
17	2	6180326N	Adapter Seal	Ethylene Propylene
18	4	6180119N	PWT Seal	Ethylene Propylene
19	2	4080062-4	Shim, Adapter [5mm]	Noryl
20	2	4080704	Shim, Adapter [2mm]	Noryl

*3 each with shell length -4 and longer

Shell Length Code	L mm	P1 STANDARD mm	P2 Optional mm	P3 Optional mm	S Span mm	Empty Weight kg
-1	1565	1194	1143	1168.4	1@635	67
-1.5	2073	1702	1651	1676.4	1@1067	75
-2	2581	2210	2159	2184.4	1@1422	83
-3	3597	3226	3175	3200.4	1@2032	100
-4	4613	4242	4191	4216.4	2@1626	117
-5	5629	5258	5207	5232.4	2@1981	133
-6	6645	6274	6223	6248.4	2@2337	150
-7	7663	7290	7239	7264.4	2@2692	167
-7.5	8169	7798	7747	7772.4	2@2896	175
-8	8679	8306	8255	8280.4	2@3048	183