

MAGNA CG8-F

STRONG ACID CATION

FINE MESH POLYSTYRENIC GEL
8% CROSSLINKED
SODIUM FORM

ResinTech CG8-F is an amber-colored fine mesh strong acid cation resin in sodium form made with an 8% cross-linked gel. It offers faster kinetics and improved regeneration efficiency compared to similar resins with larger beads. CG8-F is intended for industrial softening applications that have high levels of iron in the feedwater, where resin bed depth is less than ideal, and for applications that challenge the kinetic limits of larger size resins.

APPLICATIONS

- Softening - Industrial
- Demineralization
- Iron Removal

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Styrenic Gel
Ionic Form	Sodium
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Particle Size	30 to 50 US Mesh (297 - 595 µm)
% < 50 mesh (300µm)	< 30%
Minimum Sphericity	93%
Uniformity Coefficient	1.4
Reversible Swelling	Na to H 5% to 9%
Temp Limit	280°F (138°C)
Capacity (meq/mL)	2.0
Moisture Retention	42% to 52%
Shipping Weight	49 - 51 lbs/ft ³ (785 - 817 g/L)
Color	Amber
Regenerability	Yes

CERTIFICATIONS

- Kosher Certified
- Halal Certified

PACKAGING OPTIONS

- 500 ml samples
- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks



MAGNA CG8-F

STRONG ACID CATION



FINE MESH POLYSTYRENIC GEL

8% CROSSLINKED

SODIUM FORM

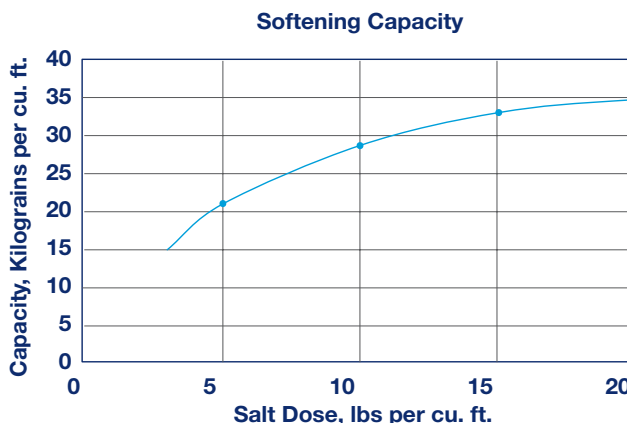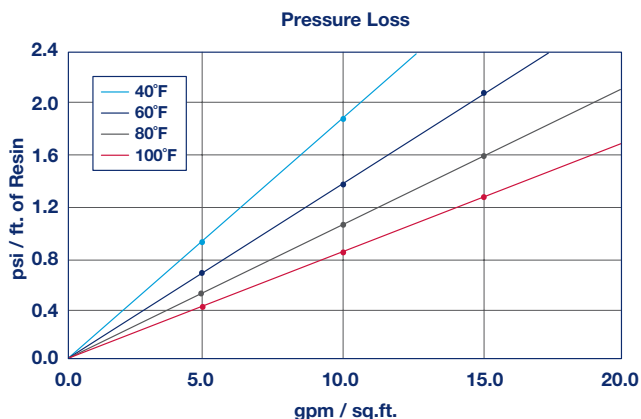

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO_3 , 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

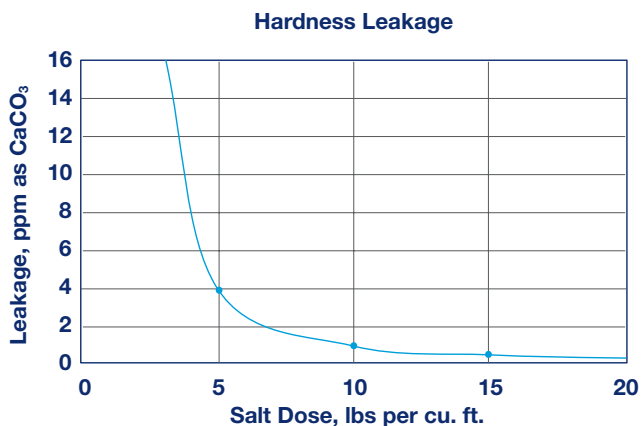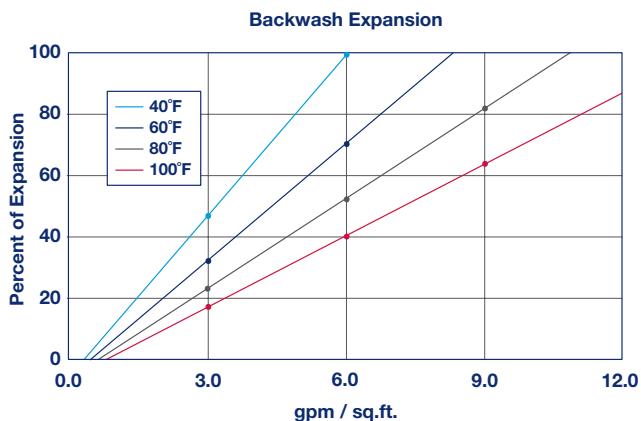

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	280°F
Sodium form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	25 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydrogen cycle	5 to 10 percent HCl
Hydrogen cycle	1 to 8 percent H_2SO_4
Salt cycle	10 to 15 percent NaCl
Regenerant level	4 to 15 lbs./cu.ft.
Regenerant flow rate	0.5 to 1.5 gpm/cu.ft.
Regenerant contact time	>20 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

Revision 1.1
ResinTech, Inc.®

LENNTech
WATER TREATMENT Solutions

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

RESINTECH INC.
INNOVATIONS IN ION EXCHANGE