

industrial NF1 series

industrial high-pressure nanofiltration elements

The Industrial NF1 nanofiltration elements feature a D-Series proprietary thin-film membrane to remove low solubility salts and organics from concentrated effluents and brines.

The Industrial NF1 will permeate sodium chloride NaCl and reject the sodium sulfate Na_2SO_4 . The Industrial NF1 elements are high pressure elements that can operate up to 80 bar. This salt segregation combined with a high-pressure construction enables production of a pure highly concentrated (> 150 g/L) single salt. The thermal process for Zero Liquid Discharge or Minimum Liquid Discharge projects can greatly be simplified to a crystallizer only, strongly reducing the investment and the operational costs.

Table 1: Element Specification

Membrane	D-Series, Thin-film membrane (TFM*)
----------	-------------------------------------

Model	Average permeate flow gpd (m ³ /day) ⁽¹⁾⁽²⁾	Minimum MgSO_4 rejection ⁽¹⁾⁽²⁾
INDUSTRIAL NF1 4040F35	1,600 (6.1)	98.0%
INDUSTRIAL NF1 8040F35	6,600 (25.0)	98.0%

(1) Average salt rejection after 24h operation. Individual flow rate may vary $\pm 25\%$.

(2) Testing conditions: 2,000 ppm MgSO_4 solution at 110psi (760kPa) operating pressure, 77°F, pH 7.5 and 15% recovery.

Water Technologies & Solutions fact sheet

Model	Spacer	Active area	Outer wrap	Part
INDUSTRIAL NF1 4040F35	35 (0.89)	75 (7.0)	Fiberglass	3154540
INDUSTRIAL NF1 8040F35	35 (0.89)	330 (30.7)	Fiberglass	3148906

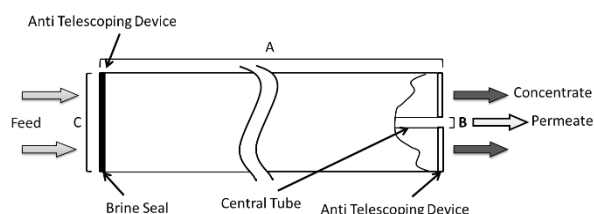


Figure 1 : Element Dimensions Diagram – Female

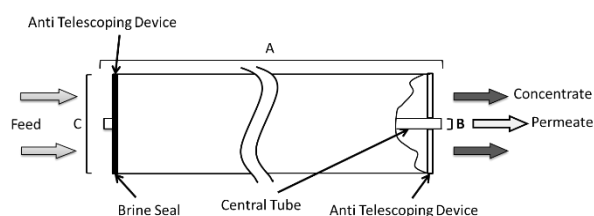


Figure 2: Element Dimensions Diagram – Male

LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

Table 2: Dimensions and Weight

Model	Type	Dimensions, inches (cm)			Boxed Weight lbs. (kg)
		A	B	C	
4040F	Male	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	11 (5)
8040F	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

Table 3: Operating and CIP parameters

Typical Operating Flux	5 – 20 GFD (8 – 34 LMH)
Maximum Operating Pressure	1,200 psi (8,276 kPa) if T < 77F (25°C) 580 psi (4,000 kPa) if T > 77F (25°C)
Maximum Temperature	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
pH Range	Continuous operation: 3.0 – 9.0 Clean-In-Place (CIP): 2.0 – 11.0 (1)
Maximum Pressure Drop	Over an element: 15psi (103kPa) Per housing: 60psi (414kPa)
Chlorine Tolerance	500 ppm x hours, Dechlorination recommended
Feedwater	NTU < 1 SDI ₁₅ < 5

(1) Refer to Cleaning Guidelines Technical Bulletin TB1194.

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289