

TRILITE® MC-08H

Uniform Particle Size Strong Acid Cation Exchange Resin

TRILITE® MC-08H is a UPS, SAC gel-type resin. Because of its excellent ion removal capacity, high purity water can be produced economically. TRILITE® MC-08H is a standard cross-linkage product and it has outstanding mechanical and chemical stability, leading to low crush rate even after long-term use. TRILITE® MC-08 can be supplied by Na⁺ form but H⁺ form can be available depending on application and user's request.

Physical and Chemical Properties

Matrix	Polystyrene+DVB, Gel	Functional Group	Sulfonic acid
Ionic Form	H ⁺	Total Capacity(eq/ℓ)	1.80 ↑
Shipping Density(g/ℓ)	800	Moisture Retention(%)	50~56
Particle Density	1.20	Uniformity Coefficient	1.1 ↓
Particle Size(μm)	620±50	Swelling Rate(Na ⁺ →H ⁺ , %)	9
Whole Beads(%)	95 ↑		

Recommended Operating Conditions

Operating Temp(°C)	120 ↓	pH Range	0~14
Bed Depth(mm)	800	Service Flow Rate(m/h)	5~60

Regeneration

Regenerant	HCl / H ₂ SO ₄ / NaCl	Concentration(%)	HCl (4~10) / H ₂ SO ₄ (1~4) / NaCl (8~12)
Level(g/ℓ)	50~200	Flow Rate(m/h)	2~10
Rinse Requirement(BV)	2~6		

Applications

TRILITE® MC-08H is used for general industrial water treatment such as water softening and demineralization.

Hydraulic Characteristics

Figure 1 and 2 show the backwash expansion of TRILITE® MC-08 as a function of flow rate and temperature.

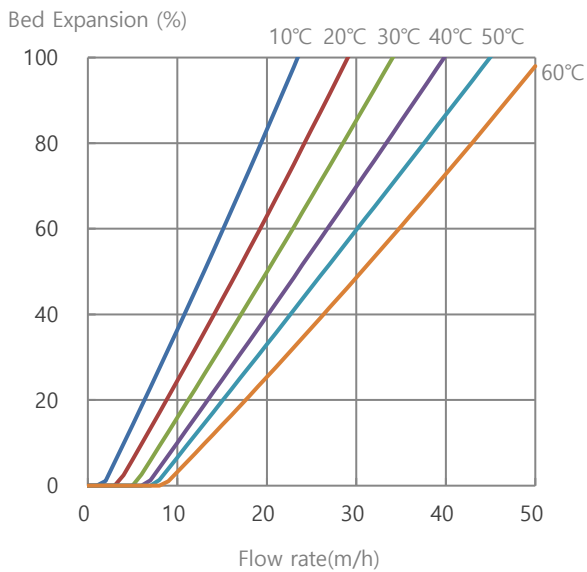


Figure 1. TRILITE® MC-08 Na⁺ Type

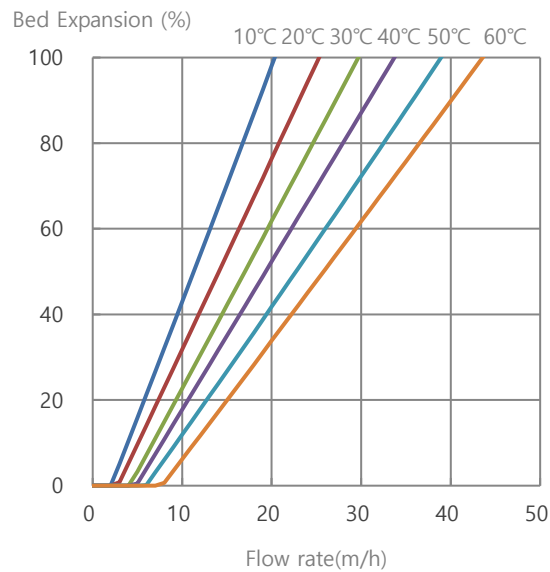


Figure 2. TRILITE® MC-08 H⁺ Type

Figure 3 and 4 show the pressure drop of TRILITE® MC-08 as a function of flow rate and water temperature.

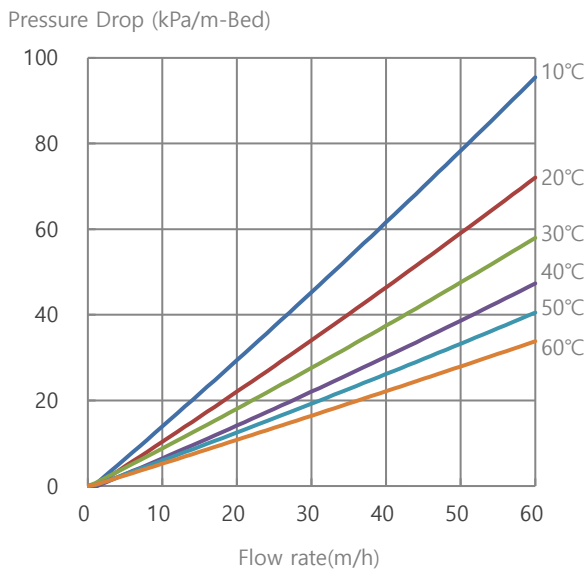


Figure 3. TRILITE® MC-08 Na⁺ Type

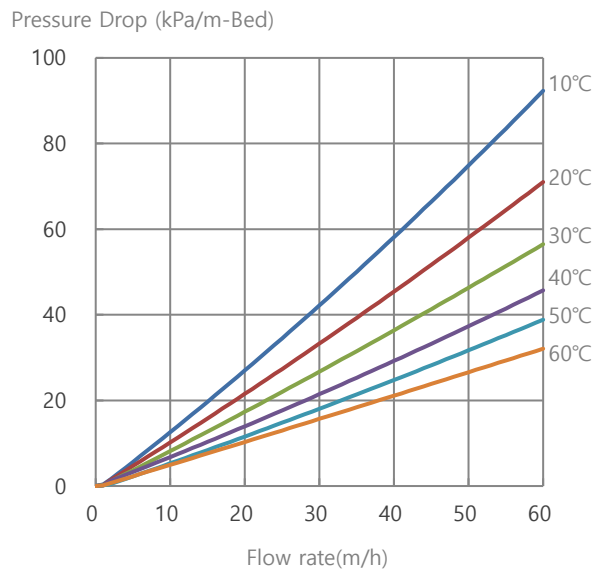


Figure 4. TRILITE® MC-08 H⁺ Type

All information contained in brochure is not absolute rather than relative one, created under the controlled environment by Samyang Corporation. Therefore, Samyang Corporation has no legal responsibility with respect to any and all information provided in brochure.



info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289