

SULZER

LENNTECH
WATER TREATMENT Solutions

Submersible Mixers Type ABS RW 200 – RW 650



Submersible Mixers Type ABS RW 200 – RW 650

Sulzer's standard range of submersible mixers type ABS RW – economical but robust without compromising on the reliable design.

Main Applications

A compact and versatile mixer with a wide range of applications, including use in aggressive and abrasive liquids.

- Mixing and stirring applications in sewage treatment plants and industrial areas such as:
 - Equalization of sewage
 - Biological processes (aerobic, anoxic and anaerobic)
 - Selector (contact zone)
- Applicable for homogenization highly concentrated sludge and slurries such as:
 - Primary, secondary and digested sludge in storage and buffer tanks
 - Lime and mineral slurries
- Mixing applications in pump sumps as prevention of deposits and floating crusts (RW 200/280)
- Hazardous locations:
 - Certification for ATEX (Ex II 2G k Ex d IIB T4), FM and CSA available as an option

Key Customer Benefits

Economical

- The RW mixer range includes several submersible mixers with integral motors ranging from 1.3 to 13 kW (1.7 – 17.5 hp)
- Sulzer offers efficient multiple and gear-driven mixers either standard or explosion-proof motor enclosures
- Reduced energy costs
- Short mixing times

Reliable

- Compact, water pressure-tight design
- Minimal risk of motor overloading

Easy to replace existing installations

Our wide range of brackets and adapters make them suitable for existing guide rails and lifting devices without modification to meet customer needs.

Submersible Mixers Type ABS RW 200 – RW 650



Operating data

50 Hz	Propeller diameter	60 Hz
200 - 650 mm		200 – 650 mm 7.9 – 25.6 in
up to 11 kW	Motor power	up to 13 kW up to 17.5 hp
up to 87%	Motor efficiency	up to 88%
up to 0,83 m³/s	Mixing flow	up to 0.92 m³/s up to 14,600 USgpm

Materials

Mixer parts RW 400 – RW 650	EC (cast iron)	CR (stainless steel)
Motor housing	EN-GJL-250, painted	1.4571 (AISI 316)
Motor shaft / propeller shaft	1.4021 (AISI 420)	1.4404 (AISI 316)
Propeller	1.4571 (AISI 316)	1.4571 (AISI 316)
Fasteners	1.4401 (AISI 316)	1.4401 (AISI 316)

Mixer parts RW 200 and RW 280	EC (cast iron)
Motor housing	EN-GJL-250, painted
Motor shaft / propeller shaft	1.4021 (AISI 420)
Propeller	EN-GJL-250, painted
Fasteners	1.4401 (AISI 316)

Mixer parts RW 480	EC (cast iron)
Motor housing	EN-GJL-250, painted
Motor shaft / propeller shaft	1.4021 (AISI 420) / 1.4418 (AISI -)
Propeller	1.4571 (AISI 316)
Fasteners	1.4401 (AISI 316)

RW 400 and RW 650

Features and benefits

1 Efficient three-phase motor, water pressure-tight encapsulated. Protection type IP 68, stator insulation class F (155°C). Motor shaft and rotor dynamically balanced

- Economical and reliable design
- Continuous running 24/7

2 Large, long-lasting bearings

- Offer true reliability with a calculated lifetime of more than 100,000 operating hours
- Need no maintenance – lubricated for life

3 DI-system

- Seal monitoring and indication that an inspection is due

4 Solids deflection ring

- Protects the mechanical seal from damage due to the ingress of solids or fibrous matter

5 Enhanced mechanical seal protection

- Keeps the mechanical seal clog-free
- Greatly extends the life of the seal

6 Hydraulic-optimized, 2- or 3-blade axial flow propeller design

- Achieves high thrust and therefore a high flow capacity

- Strong rotating flow in axial direction
- Ensures high mixing performance
- Reduces maintenance through self-cleaning

7 Abrasion-resistant galvanically insulated guide tube and suspension


- Reduces the risk of electrochemical corrosion

8 TCS (Thermo Control System)

- Provides a warning or switches off the motor automatically before the permissible temperature limit is exceeded, whether due to high-temperature medium or another problem source

9 Corrosion resistant execution


- Suitable for industrial applications and nitrification tanks in Wastewater Treatment Plants (WWTP)

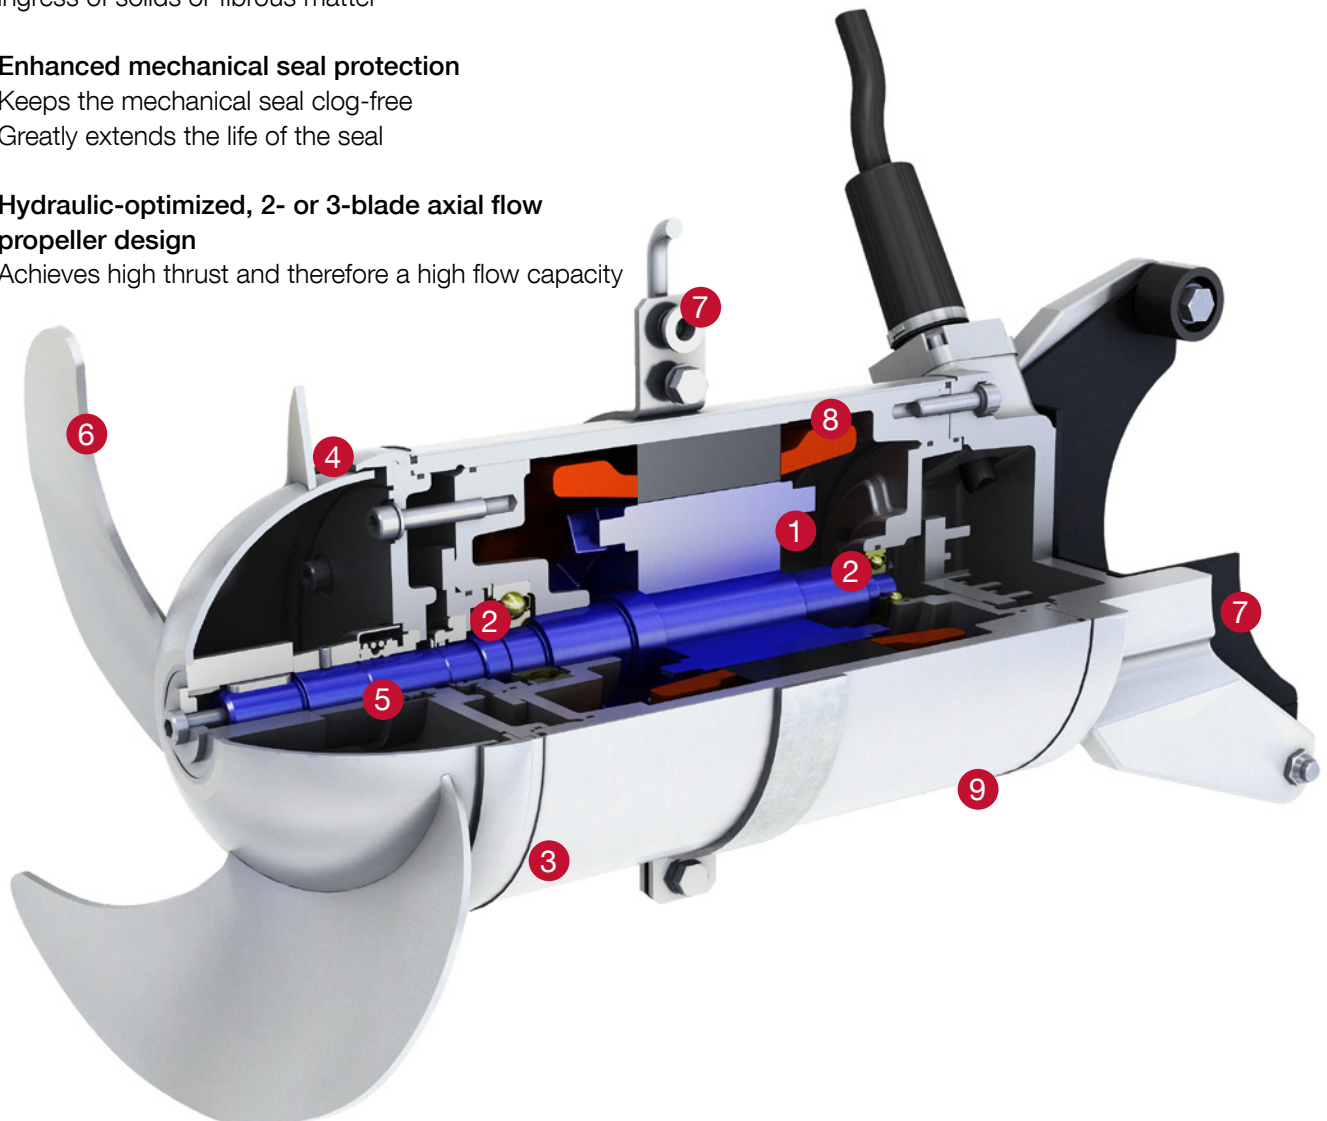

RW 480

Features and benefits

- 1 Efficient three-phase motor, water pressure-tight encapsulated. Protection type IP 68, stator insulation class F (155°C). Motor shaft and rotor dynamically balanced**
 - Economical and reliable design
- 2 Helical one stage robust gearbox**
 - Allows numerous ratios via fatigue-strength helical gears
 - Calculated lifetime of more than 100,000 hours for the oil-lubricated bearings
 - Compact and lightweight drives
- 3 Large, long-lasting bearings**
 - Offer true reliability with a calculated lifetime of more than 100,000 operating hours
 - Need no maintenance – lubricated for life
- 4 DI-system**
 - Seal monitoring and indication that an inspection is due
- 5 Solids deflection ring**
 - Protects the mechanical seal from damage due to the ingress of solids or fibrous matter
- 6 Enhanced mechanical seal protection**
 - Keeps the mechanical seal clog-free
 - Greatly extends the life of the seal
- 7 Special 2-blade mixed-flow propeller design**
 - Strong rotating turbulent flow in radial and axial direction
 - Highly efficient for homogenization of concentrated sludge and slurries
 - Ensures high mixing performance
 - Reduces maintenance through self-cleaning
- 8 Abrasion-resistant galvanically insulated guide tube and suspension**
 - Reduces the risk of electrochemical corrosion
- 9 TCS (Thermo Control System)**
 - Provides a warning or switches off the motor automatically before the permissible temperature limit is exceeded, whether due to high-temperature medium or another problem source

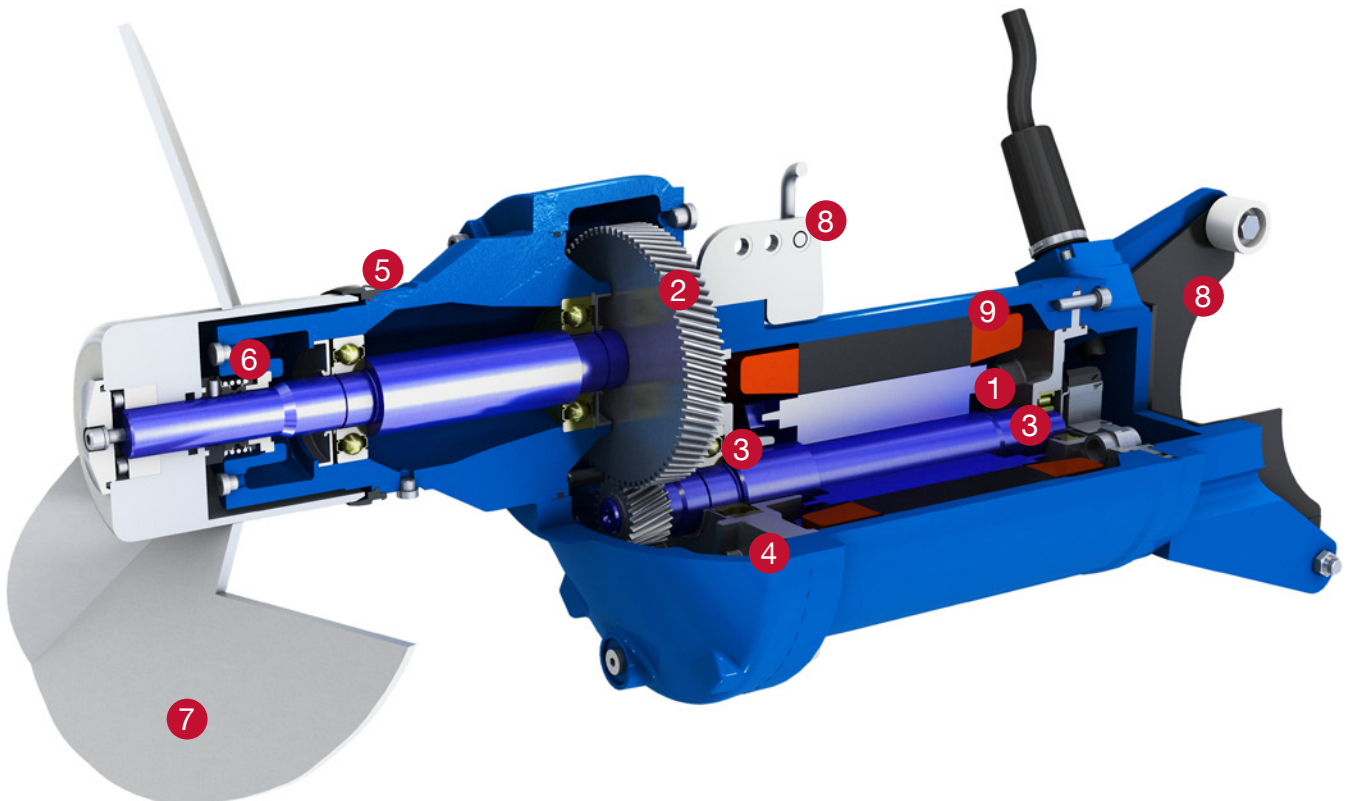

RW 200 and RW 280

Features and benefits

Prevention of deposits and floating crusts in pump sumps, it keeps the sump clean, it limits the accumulation of solids and consequently the pumps blockages. Intermittent duty when used in combination with the pumps, to reduce the power consumption.

- **Efficient three-phase motor, water pressure-tight encapsulated. Protection type IP 68, stator insulation class F (155°C). Motor shaft and rotor dynamically balanced**

- Economical and reliable design

- **DI-system**

- Seal monitoring and indication that an inspection is due

- **Solids deflection ring**

- Protects the mechanical seal from damage due to the ingress of solids or fibrous matter

- **Hydraulic-optimized, 2-blade axial flow propeller design running at high speed (4 poles)**

- Strong rotating turbulent flow in axial direction
- Highly efficient for homogenization of raw sewage and floating crusts
- Ensures high mixing performance
- Reduces maintenance through self-cleaning

- **TCS (Thermo Control System)**

- Provides a warning or switches off the motor automatically before the permissible temperature limit is exceeded, whether due to high-temperature medium or another problem source

- **Versatile mounting bracket for hanging installation**

- It allows to adjust both vertical and horizontal orientation of the mixer to remove the sediments from the dead zones of the wet sump
- The hanging installation allows retrofitting the mixer in critical pumping stations even when they are in operation! The installation footprint is minimal




RW 200 / RW 280 pump stations

The RW 200 / RW 280 mixers are mainly used for mixing applications in pump sumps. The function of the mixers is to thoroughly mix up the contents of the sump before the pumps themselves start up, so that after completion of the pumping only a small amount of deposit remains. Silting up of the pump sump is therefore effectively avoided.

In general the operation of the mixers in the pump sump is controlled as follows:

The mixer is operated by a level control unit which switches it on shortly before the pumps themselves are switched on. In general a timer allows 30 to 45 seconds mixing before starting the pumps. An additional level control unit switches off the mixer while propeller coverage of 30 to 40 cm remains.

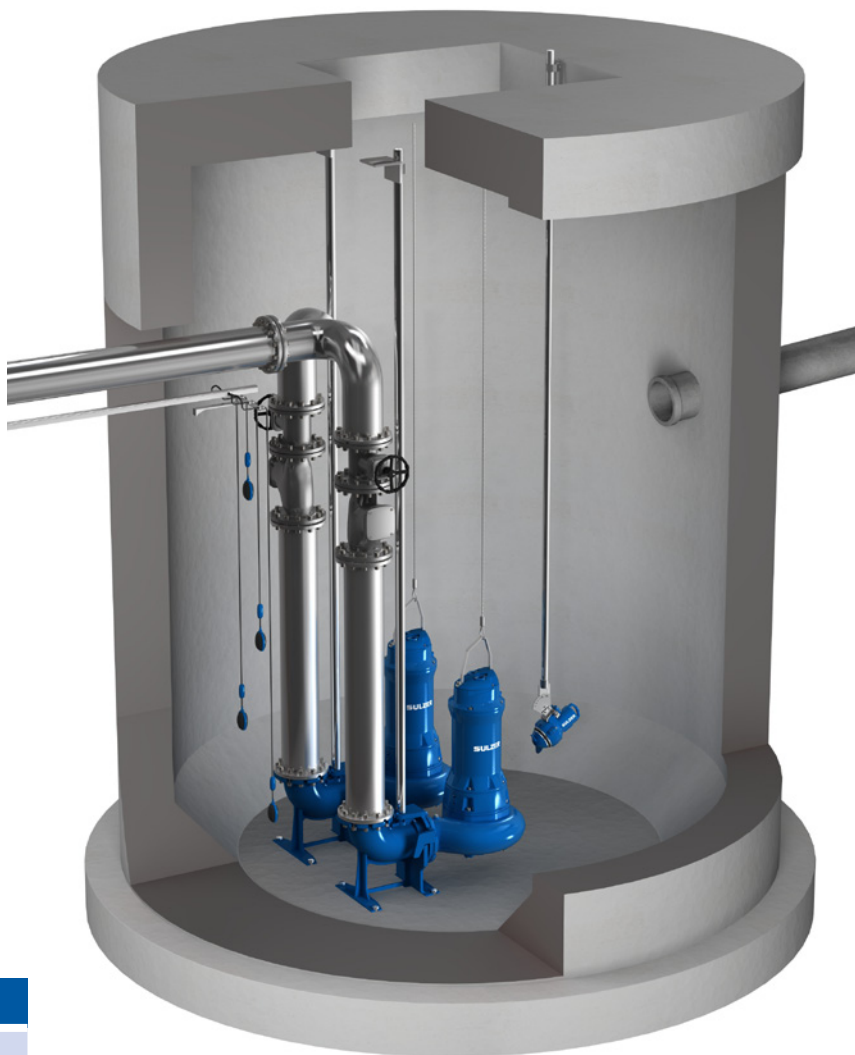


Specific power density

Municipal raw sewage	25 - 40 W/m ³
Sewage containing lots of solid materials	50 - 80 W/m ³
Sewage containing lots of sandy materials	100 - 200 W/m ³

Max. sump size when using only RW 200 / RW 280



Round
Max. diameter:
RW 200 = 3.5 m
RW 280 = 5.0 m

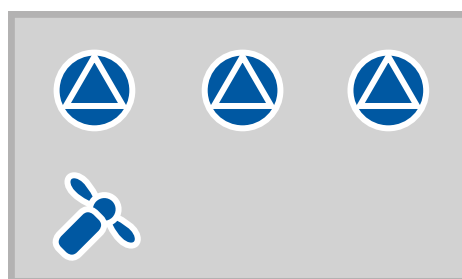

Rectangular tanks
Max. size:
RW 200 = 3 x 5 m
RW 280 = 4 x 6 m



info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289