

DAB Pump 2/3 KVE 50

SETS WITH MULTISTAGE CENTRIFUGAL PUMPS ON A VERTICAL AXIS

LENNTECH

info@lennotech.com

www.lennotech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

The use of vertically-mounted multistage centrifugal "KV" pumps offers high performance, versatility of use and silent-running. Used in large civil installations, they must be chosen by specialist engineers capable of assessing the real requirements of the systems in question.

HYDRAULIC PART

- 2-3 KV 50 vertical multistage electric pumps;
- Galvanised steel plate complete with 4 anti-vibration rubber feet;
- Suction and delivery manifold in galvanised steel;
- Suction and delivery shut-off valves

- Suction check valve;
- Anti-vibration flexible couplings for connection to suction and delivery pipes;
- BY-PASS circuit complete with shut-off and automatic safety valve;
- Radial pressure gauge with shut-off valve;
- Adjustable galvanised steel column support for electrical panel;
- Membrane tanks.



TECHNICAL DATA - 2 KVE 50


(Q max 86 m³/h - H max 150 m.c.a.) - 3 x 400 V~

3 KVE 50


(Q max 129 m³/h - H max 150 m.c.a.) - 3 x 400 V~

MODEL		VOLTAGE 50 Hz	P2 NOMINAL		In A	ADJUSTABLE PRESSURE MAX - MIN BAR
			kW x2	HP x2		
2 KVE 50/3 T	500440370	3x400 V ~	2x9,2	2x12,5	2x18	8 - 4
2 KVE 50/4 T	500440380	3x400 V ~	2x11	2x15	2x22	10 - 5
3 KVE 50/3 T	500442220	3x400 V ~	3x9,2	3x12,5	3x18	8 - 4
3 KVE 50/4 T	500442230	3x400 V ~	3x11	3x15	3x22	10 - 5

2 KVE 50

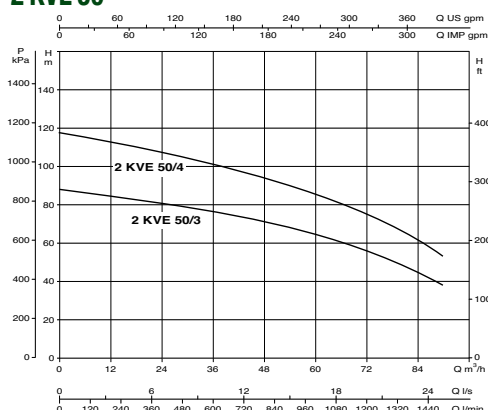


3 KVE 50

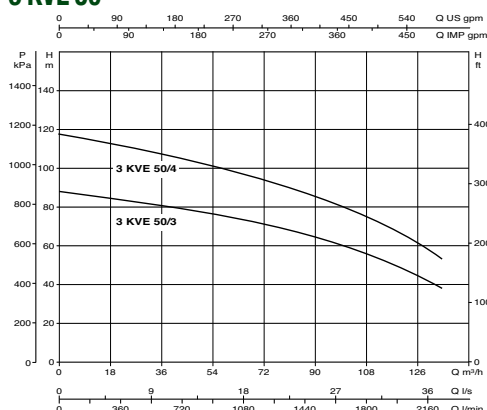


DIMENSIONS AND WEIGHTS - 2 KVCX AD

2 KVE 50

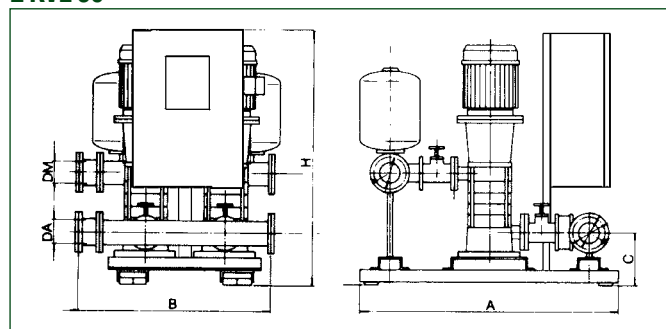

3 KVE 50

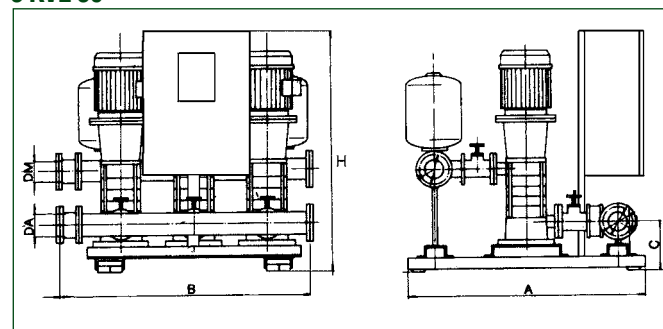

MODEL	A	B	C	H	MANIFOLD		WEIGHT Kg
					DNA	DNM	
2 KVE 50/3	1400	1000	300	1400	DN 125 - PN 10	DN 125 - PN 16	677
2 KVE 50/4	1400	1000	300	1400	DN 125 - PN 10	DN 125 - PN 16	782
3 KVE 50/3	1400	1200	300	1400	DN 125 - PN 10	DN 125 - PN 16	1007
3 KVE 50/4	1400	1200	300	1400	DN 125 - PN 10	DN 125 - PN 16	1167