

DAB Pump 2 K

SETS WITH CENTRIFUGAL PUMPS TWIN IMPELLER

Booster sets with 2 twin impeller centrifugal K pumps complete with base, suction and delivery manifold and 2 membrane vessels.

ELECTRICAL PANEL

Automatic inverter for exchanging the order of pump starting at each start-up. Main switch.

Float or pressure switch can be inserted as protection

against operation without water. Low voltage auxiliary circuit complete with transformer and fuse.

The units are supplied with tanks and air feeder connection.



LENNTECH

info@lennotech.com

www.lennotech.com


Tel. +31-15-261.09.00

Fax. +31-15-261.62.89




TECHNICAL DATA

MODEL	CODE	ELECTRICAL DATA				MAX PRESSURE OBTAINABLE BAR	PRESSURE SWITCH SETTING IN BAR
		VOLTAGE 50 Hz	P2 NOMINAL		In A		
			kW X 2	HP X 2			
2 K35/40 M	500124020	1 X 230 V ~	0,75	1	2x5,5	4,2	2,2÷3,3
2 K35/40 T	500124520	3 X 400 V ~	0,75	1	2x3,5	4,2	2,2÷3,3
2 K45/50 M	500124040	1 X 230 V ~	1,1	1,5	2x8,3	5,2	2,9÷4,6
2 K45/50 T	500124540	3 X 400 V ~	1,1	1,5	2x3,6	5,2	2,9÷4,6
2 K55/50 M	500124060	1 X 230 V ~	1,85	2,5	2x12,8	6,2	3,4÷5,3
2 K55/50 T	500124560	3 X 400 V ~	1,85	2,5	2x4,8	6,2	3,4÷5,3
2 K55/100 T	500124620	3 X 400 V ~	2,2	3	2x6,7	6,2	3,5÷5,5
2 K66/100 T	500124640	3 X 400 V ~	3	4	2x8,4	7,3	4,3÷6,5
2 K90/100 T	500124660	3 X 400 V ~	4	5,5	2x9,7	8,4	5,5÷8

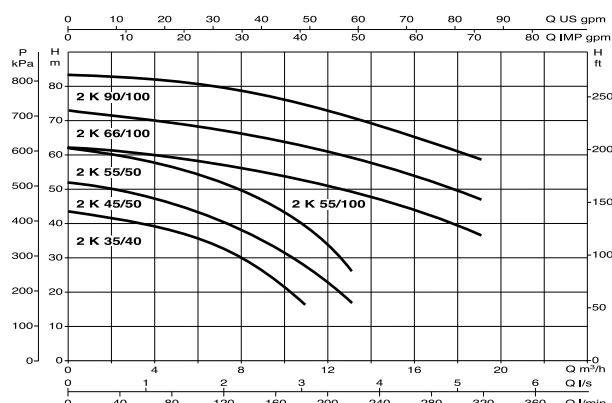

DIMENSIONS AND WEIGHTS - 2 KVCX AD

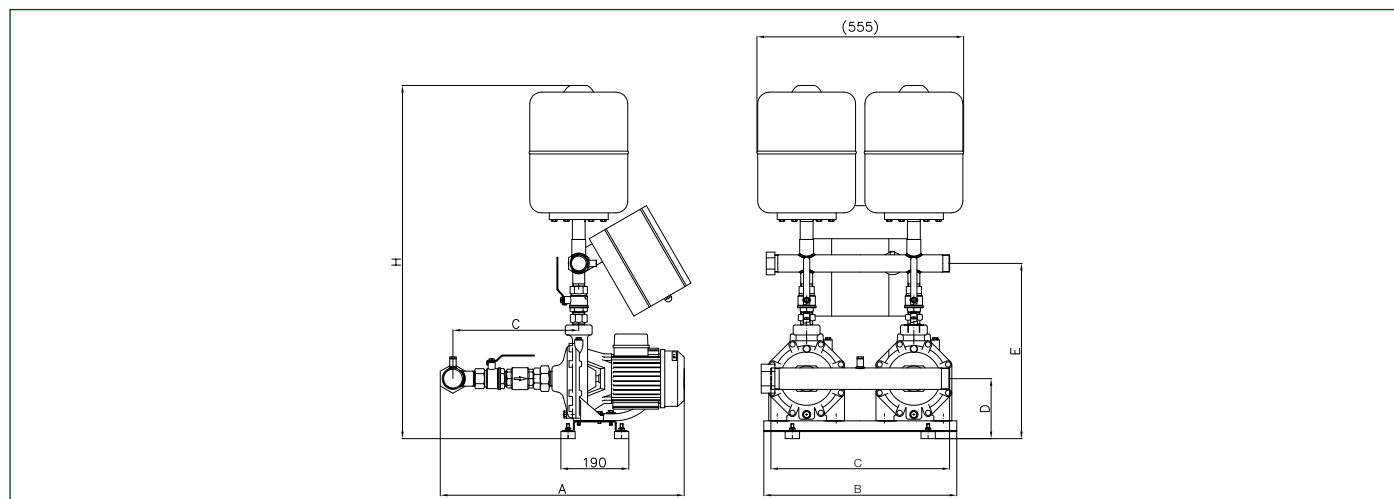

MODEL	A	B	C	D	E	H	H1	H2	Ø MANIFOLD		WEIGHT Kg.
									SUCTION	DELIVERY	
2 K 35/40 M	700	540	500	555	400	910	457	150	2"	1 1/2"	69
2 K 45/40 M	700	540	500	555	400	910	480	205	2"	1 1/2"	85
2 K 55/40 M	700	540	500	555	400	910	480	205	2"	1 1/2"	92
2 K 35/40 T	700	540	500	555	400	910	457	150	2"	1 1/2"	73
2 K 45/40 T	700	540	500	555	400	910	480	205	2"	1 1/2"	89
2 K 55/40 T	700	540	500	555	400	910	480	205	2"	1 1/2"	92
2 K 55/100 T	900	580	500	555	400	1120	570	220	2 1/2"	2 1/2"	155
2 K 66/100 T	900	580	500	555	400	1120	570	220	2 1/2"	2 1/2"	160
2 K 90/100 T	900	580	500	555	400	1120	570	220	2 1/2"	2 1/2"	167