

DAB pump JETCOM SP - EUROCOM SP

PUMPS FOR SWIMMING POOL



SWIMMING POOL WATER SUPPLY

LENNTECH

info@lennotech.com

www.lennotech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

Self-priming centrifugal (Jetcom) or multistage (Eurocom) pump with excellent suction capacity even when there are air bubbles. Suitable for use with water containing small sand impurities. Especially suitable for water supplies in domestic systems: handling of aggressive water in general with chlorine contents (swimming pools). Pump body in technopolymer.

Support and seal-carrier in AISI 316 STAINLESS STEEL.

Carbon/ceramic mechanical seal.

Rotor shaft in AISI 316 STAINLESS STEEL.

Impellers, diffuser, Venturi tube, and sand guard in technopolymer. Clearance rings in stainless steel.

Continuous duty asynchronous motor.

Built-in motor overload cut out and a capacitor

permanently on in the single-phase version.

Protection for the three-phase version is the responsibility of the user.

Motor protection level: IP 44

Terminals protection level: IP 55

Insulation class: F

Standard voltage:

220/240V - 50 Hz single-phase

230/400V - 50 Hz three-phase

Operating range: from 10 to 80 l/min with head of up to 58 m depending on the model

Liquid quality requirements: clean, free of solid or abrasive contaminants, swimming pool water (containing chlorine).

Liquid temperature range:

from 0°C to +35°C for domestic use (EN 60335-2-41)

from 0°C to +40°C for other uses.

Maximum ambient temperature: +40°C

Maximum operating pressure: 6 bar (600 kPa)



Installation: fixed or portable in horizontal position



TECHNICAL DATA

MODEL	CODE	ELECTRICAL DATA						
		VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
				kW	HP		µF	Vc
JETCOM 102 SP M	102676030	1x220-240 V ~	1,13	0,75	1	5,1	16	450
EUROCOM SP 30/50 M	102966260	1x220-240 V ~	880	0,55	0,75	3,9	12,5	450
EUROCOM SP 30/50 T	102966270	3x230-400 V ~	870	0,55	0,75	2,8-1,6	—	—
EUROCOM SP 40/50 M	102966280	1x220-240 V ~	1200	0,75	1	5,3	20	450
EUROCOM SP 40/50 T*	60145281	3x230-400 V ~	1180	0,75	1	3,8-2,2	—	—


* NEW IE2 MOTOR

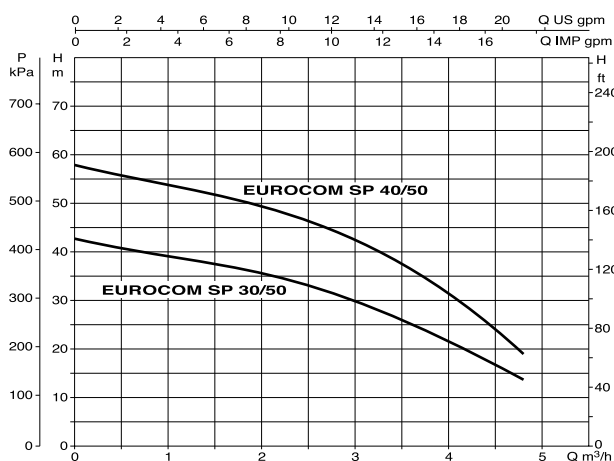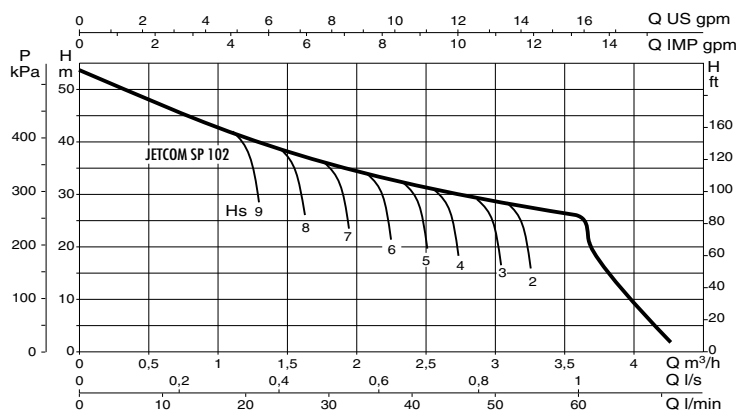

JETCOM SP - EUROCOM SP

PUMPS FOR SWIMMING POOL

DIMENSIONS AND WEIGHTS

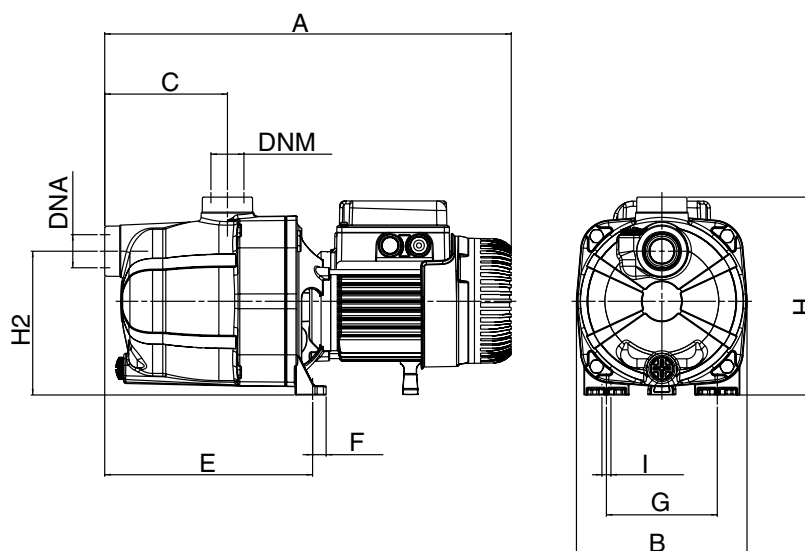

MODEL	A	B	C	E	F	G	IØ / 4 HOLES	H	H1	DNA GAS	DNM GAS	PACKAGING DIMENSIONS			WEIGHT KG	Q.TY x PALLET
												L/A	L/B	H		
JETCOM SP 102	425	170	122	208	14	111	9	203	144	1"	1"	470	240	240	9,5	28
EUROCOM SP 30/50	406	170	122	208	14	111	9	198	144	1"	1"	470	240	240	8,8	28
EUROCOM SP 40/50	425	170	122	208	14	111	9	203	144	1"	1"	470	240	240	11,3	28

MULTISTAGE CENTRIFUGAL
AND SELF-PRIMING PUMPS